




Housing with anti-slip-means

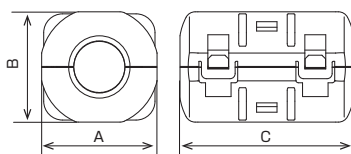

FERRITE CLAMP with excellent heat resistance

Feature

- Split type Ferrite Clamp, making it easy to apply to assembled wires.
- Housing structure with anti-slip means for cable tie.
Highly reliable because of the lock of the housing as well as the fastening of the tie.
(※Excluding RFC-20-A)
- Operating temperature range: -40°C to +125°C.

Material

- Ferrite Core: Soft ferrite
- Housing: PA66 (Color: Black / Flammability: UL94V-2)

Unit: mm

Part No.	A	B	C	Applicable cable diameter	Impedance* Ω /100MHz (1turn)
RFC-6-A	18.5	18.1	34.0	Max. ϕ 6.0	≥ 135
RFC-8-A	20.6	20.1	34.0	Max. ϕ 8.5	≥ 120
RFC-9-A	22.6	21.7	34.0	Max. ϕ 9.5	≥ 125
RFC-H13-A	31.7	29.4	41.0	Max. ϕ 13.5	≥ 170
RFC-20-A	40.0	40.0	47.0	Max. ϕ 20	≥ 180

Impedance vs frequency

