



Low height noise filter saves space



Feature

- Low profile provides 30% space saving compared with the conventional type.
- Housing with anti-slip means for cable tie around its outer side.
- Optimal for onboard charging cables and inverter powercables that have limited space for conducted noise suppression.

Material

- Ferrite core: Soft ferrite
- Housing: PA66 (High-frequency / Color: Black, Flammability: UL94V-2)
(Low-frequency / Color: Natural, Flammability: UL94V-2)

Specification



Cable tie anti-slippage rib structure

Unit: mm



Part No.	Frequency	Color	A	B	C	D	E	Applicable cable diameter
BFCWN-2010-A-BK-1PC	High-frequency	Black	45	32	20	10	30	φ 9 × two cables
BFCWN-2010MA-NC-1PC	Low-frequency	Natural						
BFCWN-3515-A-BK-1PC	High-frequency	Black	67	44	35	15	31	φ 14 × two cables
BFCWN-3515MA-NC-1PC	Low-frequency	Natural						

Low-frequency cores

Split ferrite clamp

Non split type

● Impedance properties

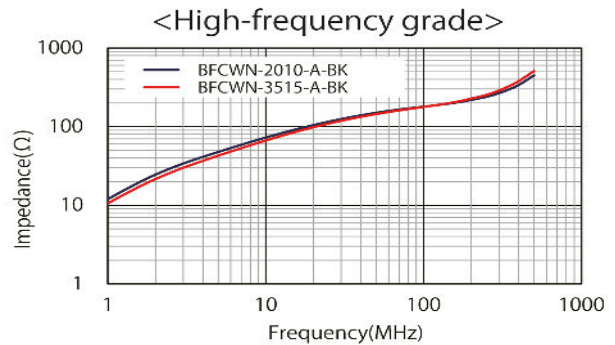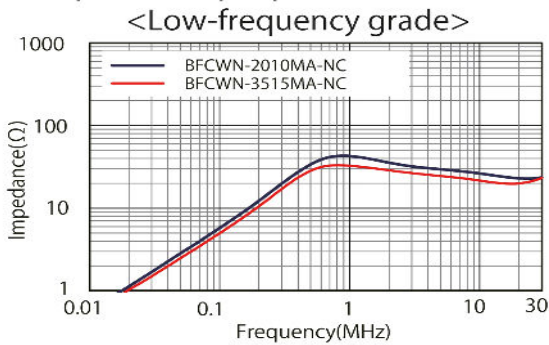

※The values are measured data for reference, not guaranteed.