



Dust resistant plug that can be pierced with round cables

Features

- Consists of soft and hard components for tight hold and secure fixation.
- Can be used as a blind bushing.





Insertion Mounting



Round hole

Material

- Soft component : Polyurethane Elastomer (Color : Gray)
- Hard component : Polyurethane Resin (Color : Gray)

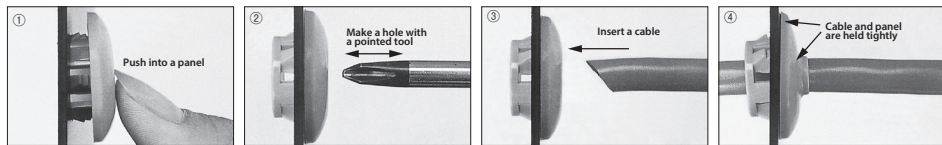

Part No.	ϕA	ϕB	C	D	Mounting hole size	Panel thickness	Applicable wire	Std. Package
DDB-1216	26.5	15	9.2	11.6	$\phi 16^{+0.2}_0$	1.0~3.2	$\phi 3\sim 6$	100 pcs.
DDB-1520	30.0	19	9.0	12.4	$\phi 20^{+0.2}_0$		$\phi 3\sim 9$	
DDB-2428	38.0	27	9.2	11.8	$\phi 28^{+0.2}_0$		$\phi 3\sim 16$	

(Unit : mm)