KITAGAWA GmbH

EMC PRODUCTS

FILTERING

SHIELDING

GROUNDING

ELECTRO–**M**AGNETIC **C**OMPATIBILITY

SYMBIOSIS & COLLABORATION

KITAGAWA INDUSTRIES CO., LTD. A global technology group providing high quality for life' s amenities through "Symbiosis & Collaboration"
The high pace of industrial technology innovationcan lead to various problems. We carry out the research and propose the solutions tothe problems in order to provide a clean electromagnetic environment.

R&D bases

Technology Center

Kasugai factory

Inazawa factory

Thailand factory

Wuxi (China) factory

Shenzhen factory

Material Developments

FUNCTIONAL FILM

Sputtering technology applied at the nano-Level for producing functional coatings provides greater design exibility for high density electronic equipment.

KG-GEL (Vibration damping and shock buffering)

KG-GEL is a special polystyrene gel with super-low hardness of ASKER FP, which provides excellent shock buffering, vibration and noise damping for equipment and sub-assembly components.

LOSTOMER (Vibration damping)

High vibration damping and heat resistant properties (100℃) for a wide range of applications. Can be produced in customized configurations.

COOLPROVIDE (Heat+EMC)

Using our original composite technology we develop multifunctional materials for simultaneous management of EMC and thermal problems.

Environmental policy

Example of hazardous element Analysis

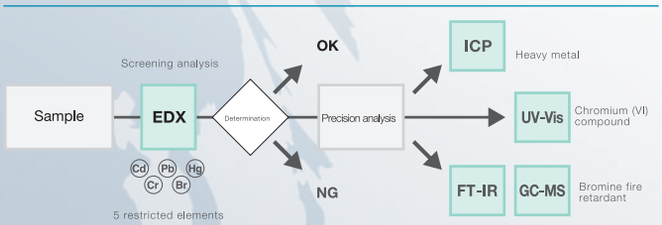

KGS is equipped with hazardous element analyticalequipment to provide safe products.

CONTENTS

ON-BOARD (with support for automated mounting) — P 1-14

GROUNDING CONTACTS P3-7

GROUNDING COMPONENTS P8,10,12

GROUNDING CLIPS P11

GROUNDING CLAMPS P13

EMC GROUNDING — P 15-18

For CABLES P16

For BOARDS, ENCLOSURES P17-18

ELECTROMAGNETIC WAVE MANAGEMENT SHEETS — P 19-27

ELECTROMAGNETIC NOISE SUPPRESSION SHEETS P22-24

ELECTROMAGNETIC NOISE SUPPRESSION SHEETS P25


USED For WIRELESS CHARGING P26


RFID／NFC P27

FERRITE CORE PRODUCTS — P 28-73

TOROIDAL / SLEEVE TYPE P30-46

FLAT TYPE P47-55

OTHERS P56-62

CHIP BEADS P63-73

GASKETS — P 74-89


SOFT P75-78

ELASTOMER P79-82

WIRE MESH P83-84

HARD GASKETS P85-89

CONDUCTIVE TAPES & SHEETS — P 90-96

CONDUCTIVE FABRIC P91

METAL FOIL P92-93

TRANSPARENT CONDUCTIVE FILM P94

THIN FILM P95

CABLE SHIELDS — P 97-101

WIRE MESH P98

MONOFILAMENT BRAIDED SLEEVE P99-100


JACKETS P101

SHIELDS FOR OPENINGS — P 102-103

EXPANDED METALS P103

ON-BOARD CONTACT／OG-282543HDR

P.4

Space-saving beryllium free contact component

Features

- Grounding reinforcement component can be mounted by an automatic mounter.
- Space-saving foot print of pad on PC board.
- Higher cost performance compared with conventional products.※

※Phosphor bronze

ON-BOARD CONTACT／OG-503253-A

P.8

SMT grounding contact for engine compartment PCB

Features

- Spring mechanism capable withstanding 10 million deflections caused by engine vibration.
- Sustained conduction is secured because of unique dimple design.
- Can be used under high temperature at 150℃

Large sized LOW CUT FERRITE CLAMP／MRFC-H40

P.32

Large sized FERRITE CLAMP for solution of low frequency range noise applicable to 40mm diameter cable.

Features

- Suitable for solution of low frequency noise from kHz to several MHz range generated from power supply.
- It is applicable measure onto the cable less than 40mm in diameter however the conventional one has to be applied to the insulation coating stripped each cable one by one.
- Two parts structures, making it easy to apply onto assembled wires.
- Highly reliable because of the lock of the housing as well as the fastening of the tie.
- Fixing by M6 screw is available. (Mouinting fixture is reinforced by metallic color.)
- The material of plastic housing is UL94V-0 certified.

HIGH μ FERRITE CLAMP／KRFC

P.31

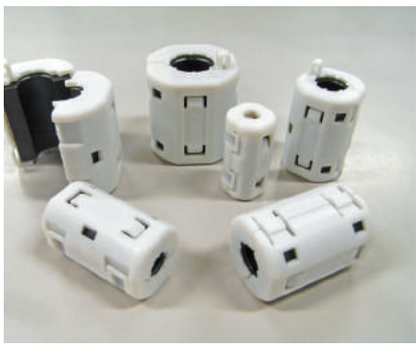

Split ferrite clamp for intermediate frequency range from 3 to 50MHz.

Features

- Effective for suppression both of conducted noise up to 30MHz and radiated noise over 30MHz.
- Split ferrite clamp with plastic housing enables to attach assembled cable and cables with connector.
- Cable tie can assist to hold electric wires and enables the product to be fixed to wire harness. (Excluding KRFC-4)
- Wire guiding system prevent wires from being pinched when winding assembly.

LOW-CUT FERRITE CLAMP／RFCW

P.47

Noise filter, usable in engine rooms

Features

- Conducted noise suppression filter for applications up to 125℃ and 10G vibration Applicable to vehicle vibrations requirements:
- ISO-16750-3-Ⅱ equivalent for passenger car transmission.
- High-frequency (RFCW-C10) and low-frequency (RFCW-13MA) noise versions FCW-C10 has a bracket for temporary fixation to corrugated tubes
- Tight fixing is available by its permanent lock structure.
- Its bracket fixture enables securing it with tape.
- Housing with anti-slip means for cable tie around its outer side.
- The material of the plastic housing is UL94V-2 certified.

TRANSPARENT CONDUCTIVE FILM / WINAL 100-020

P.94

Usable for EMC measures around liquid crystal displays and as various kinds of electrodes

Features

- Low surface electric resistance gives higher shielding effectiveness.
- Electrically conductive film with superior optical transparency.
- Conductive surface is laminated by protection film.
- Grounding terminal with aluminum foil can be provided upon.

How to retrieval contents pages

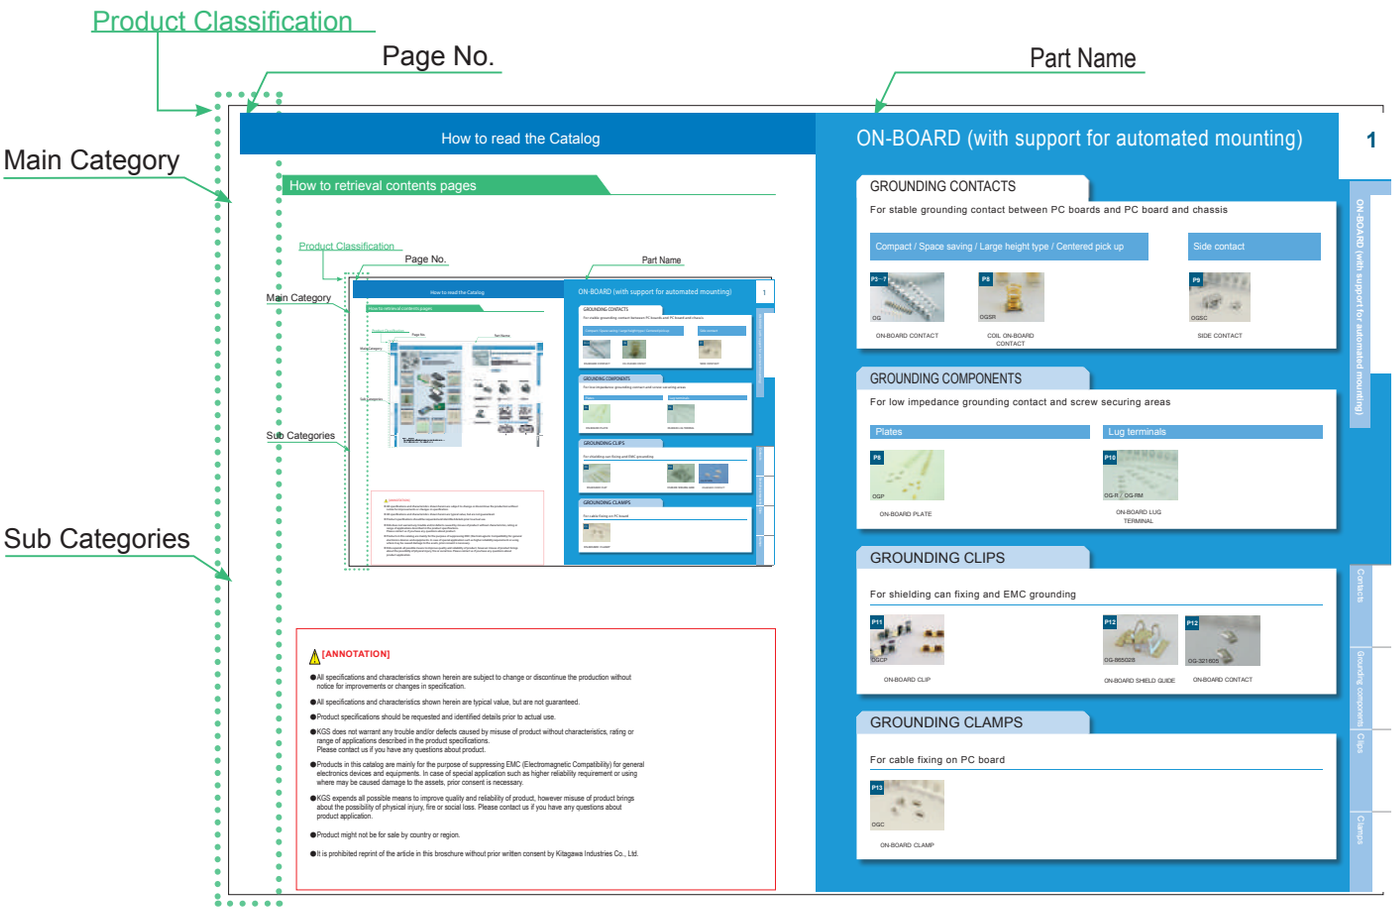

[ANNOTATION]

- All specifications and characteristics shown herein are subject to change or discontinue the production without notice for improvements or changes in specification.
- All specifications and characteristics shown herein are typical value, but are not guaranteed.
- Product specifications should be requested and identified details prior to actual use.
- KGS does not warrant any trouble and/or defects caused by misuse of product without characteristics, rating or range of applications described in the product specifications.
  Please contact us if you have any questions about product.
- Products in this catalog are mainly for the purpose of suppressing EMC (Electromagnetic Compatibility) for general electronics devices and equipments. In case of special application such as higher reliability requirement or using where may be caused damage to the assets, prior consent is necessary.
- KGS expends all possible means to improve quality and reliability of product, however misuse of product brings about the possibility of physical injury, fire or social loss. Please contact us if you have any questions about product application.
- Product might not be for sale by country or region.
- It is prohibited reprint of the article in this broschure without prior written consent by Kitagawa Industries Co., Ltd.

ON-BOARD (with support for automated mounting)

GROUNDING CONTACTS

For stable grounding contact between PC boards and PC board and chassis

Compact / Space saving / Large height type / Centered pick up

P3~7

ON-BOARD CONTACT

P8

ON-BOARD CONTACT

P12

COIL ON-BOARD CONTACT

Side contact

P9

SIDE CONTACT

GROUNDING COMPONENTS

For low impedance grounding contact and screw securing areas

Plates

P12

ON-BOARD PLATE

Lug terminals

P10



ON-BOARD LUG TERMINAL

GROUNDING CLIPS

For shielding can fixing and EMC grounding

P11



ON-BOARD CLIP

P10

ON-BOARD SHIELD GUIDE

P14

ON-BOARD CONTACT

GROUNDING CLAMPS

For cable fixing on PC board

P13

ON-BOARD CLAMP

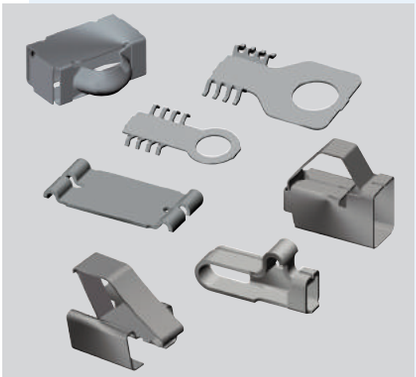

Grounding components, with support for automated mounting on PC board.

Feature

- Space saving and FG reinforcement at design stage of PC board.
- Supplied with embossed tape for automated mounting by chip mounter.
- Suitable management for emission and ESD immunity.

ON-BOARD CONTACT



Upper faces of mounted make contact with chassis, PC board and component, etc.

COIL ON-BOARD CONTACT



Durable components for grounding against vibrations and repeated compressions.

SIDE CONTACT

Side face of mounted parts makes contact with chassis, PC board and metal frame, etc.

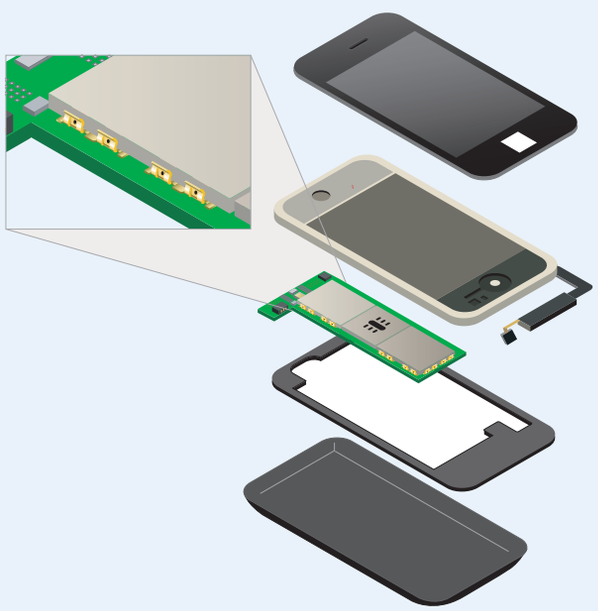

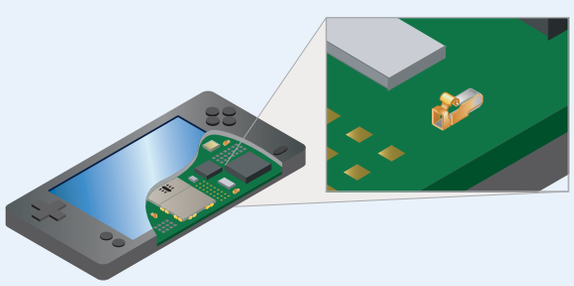

ON-BOARD CLIP



Clip mechanism enables stable fixing and grounding for shielding can.

ON-BOARD SHIELDING GUIDE

Displacement prevention mechanism improves shielding can grounding.

ON-BOARD CLAMP

Space-saving cable wiring on PC boards.

ON-BOARD PLATE



Reinforcement at contact points provided for reliable grounding.

ON-BOARD LUG TERMINAL

Improved grounding reliability at screw area.

●Notes for On-Board series

Please contact our sales department for mounting specifications such as recommended pad dimensions, etc.
Trial mounting using our products is required prior to purchase. Please check the notes indicated on the back cover.
Galvanic corrosion may occur by contact with other metals.
With regard to sales lot and delivery lead time, please contact our sales department.

ON-BOARD CONTACT／OG



Super-compact grounding components with wide variations

Feature

- Space saving, FG facilitated even where screws are precluded.
- Automated mounting on PC board is applicable.
- Box structure is introduced for distortion, deformation and damage prevention.(excluding some part numbers)

Material

- As described below

■ Compact type

Down-sized compact type for narrow space configurations.

■ Space saving type

For space saving at pad area on PC board

■ Large height type

For large clearances

■ Centered vacuum pick-up type

Vacuum pick-up point is placed at center

■ Suppression of radiated emission by multi point grounding

<Experimental contents>
- Exp 1: PC board + Aℓ metal plate (without grounding)
- Exp 2: PC board + Aℓ metal plate (4 points：A, B, C, D)
- Exp 3: PC board + Aℓ metal plate (8 points ：A, B, C, D, E, F, G, H)



GND point on test PC board

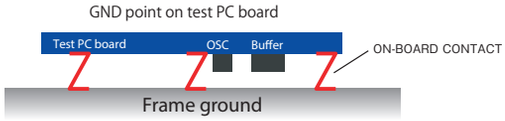

1. Without FG connection

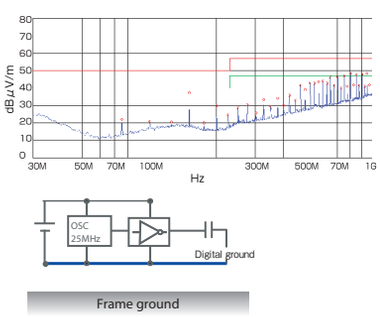

2. 4 points grounding

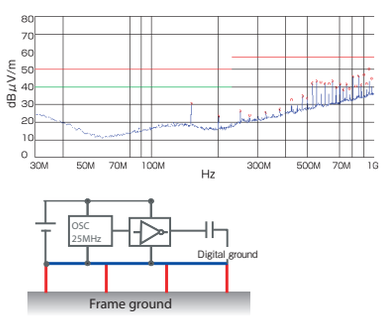

3. 8 points grounding

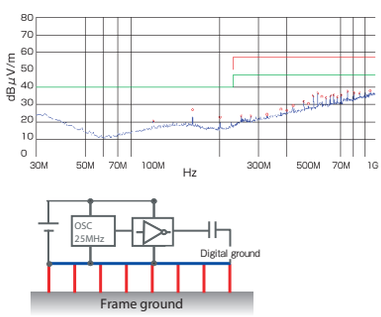

Multi point grounding enables large suppression effectiveness. (Multi point ground spacing is defined less than 1/8 of wavelength)

ON-BOARD CONTACT／OG

OG-282543HDR



Material :Phosphor bronze for spring(t =0.1mm)
Surface treatment : Sn reflow plating
Recommended height :2.5～3.9mm

OG-321605



Material :Phosphor bronze for spring(t =0.1mm)
Surface treatment : Sn reflow plating
Recommended height :0.35mm or less

OG-301012

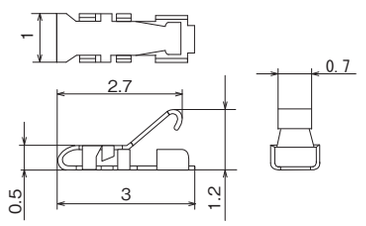

Material :Phosphor bronze for spring(t=0.08mm)
Surface treatment : Partial Au plating
Recommended height :0.6～1.1mm

Characteristics between Compression Force and Resistance

OG-282543HDR

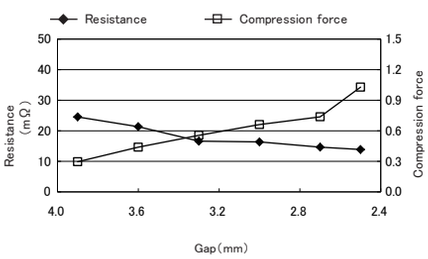

OG-321605

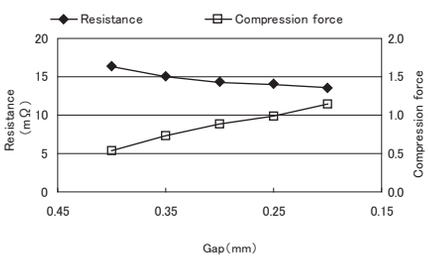

OG-301012

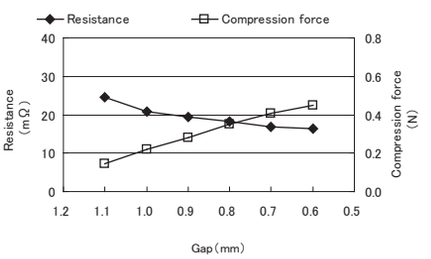

OG-320816

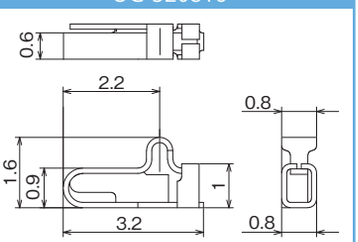

Material :Phosphor bronze for spring(t=0.12mm)
Surface treatment :Partial Au plating
Recommended height :1.1～1.4mm

OG-450818



Material :Beryllium copper(t=0.12mm)
Surface treatment : Partial Au plating
Recommended height :1.2～1.6mm

OG-321022

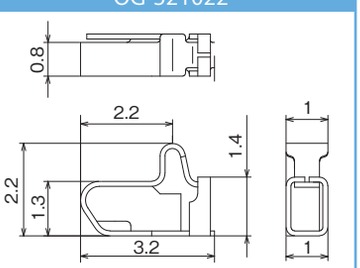

Material :Phosphor bronze for spring(t=0.12mm)
Surface treatment :PartialAu plating
Recommended height :1.5～2mm

Unit:mm

Characteristics between Compression Force and Resistance

OG-320816

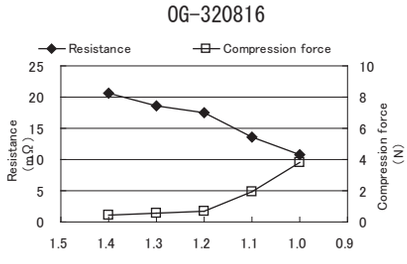

OG-450818

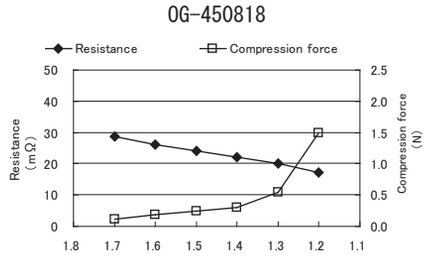

OG-321022

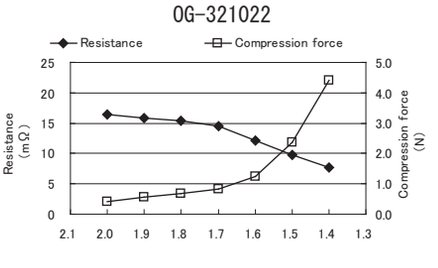

※Please confirm "Notes for Onboard series" on page 2 prior to purchase.
※The values are measured data for reference, not guaranteed.

ON-BOARD CONTACT／OG

OG-542925



Material :Phosphor bronze for spring(t=0.12mm)
Surface treatment : Partial Au plating
Recommended height :1.5～2.3mm

OG-503040



Material :Beryllium copper(t=0.1mm)
Surface treatment : Sn plating
Recommended height :2.2～3.6mm

OG-363040

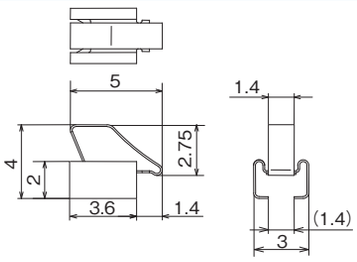

Material : Beryllium copper(t=0.1mm)
Surface treatment :Sn reflow plating(Ni plated contacts)
Recommended height :2.2～3.4mm

Unit:mm

Characteristics between Compression Force and Resistance

OG-542925

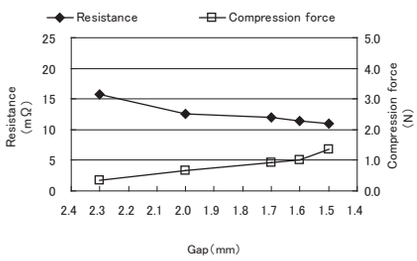

OG-503040

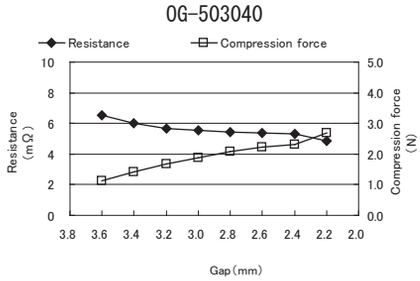

OG-363040

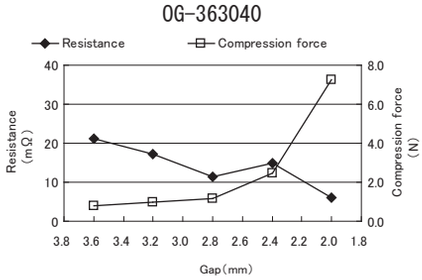

OG-363040G

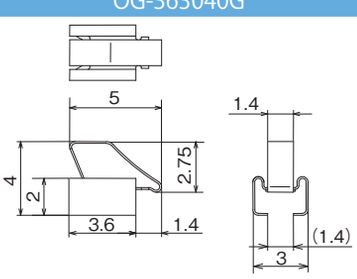

Material : Beryllium copper(t=0.1mm)
Surface treatment :Partial Au plating
Recommended height :2.2～3.4mm

OG-363040HD

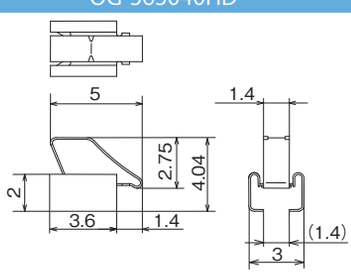

Material : Beryllium copper(t=0.1mm)
Surface treatment :Sn reflow plating(Ni plated contacts)
Recommended height :2.2～3.4mm

OG-363040HDR



Material : Phosphor bronze for spring(t=0.1mm)
Surface treatment :Sn reflow plating
Recommended height :2.2～3.4mm

Unit:mm

Characteristics between Compression Force and Resistance

OG-363040G

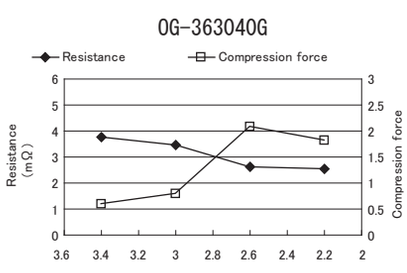

OG-363040HD

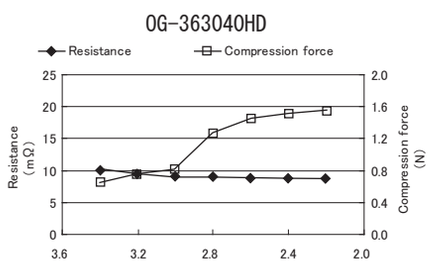

OG-363040HDR

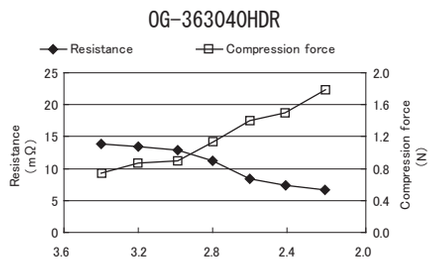

※Please confirm "Notes for Onboard series" on page 2 prior to purchase.
※The values are measured data for reference, not guaranteed.

ON-BOARD CONTACT／OG

OG-363050

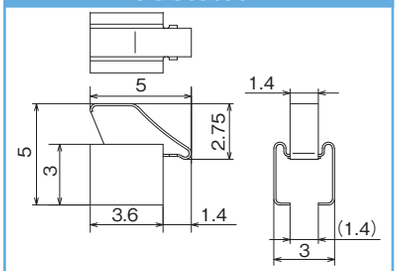

Material :Beryllium copper(t=0.1mm)
Surface treatment :Sn reflow plating(Ni plated contacts)
Recommended height :3.2～4.4mm

OG-363050G

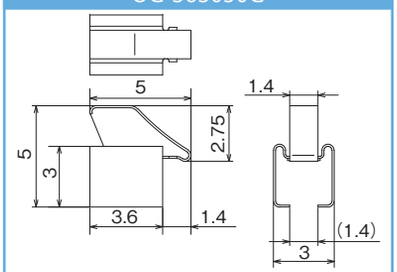

Material :Beryllium copper(t=0.1mm)
Surface treatment :Partial Au plating
Recommended height :3.2～4.4mm

OG-363050HD

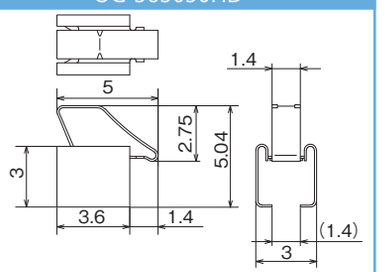

Material :Beryllium copper(t=0.1mm)
Surface treatment :Sn reflow plating(Ni plated contacts)
Recommended height :3.2～4.4mm

Unit:mm

Characteristics between Compression Force and Resistance

OG-363050

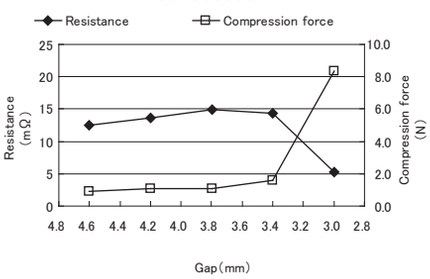

OG-363050G

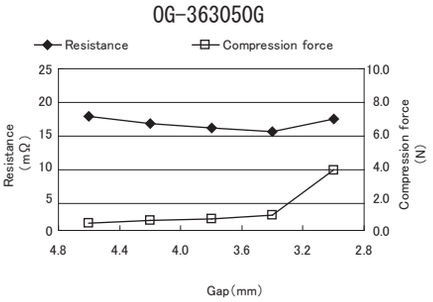

OG-363050HD

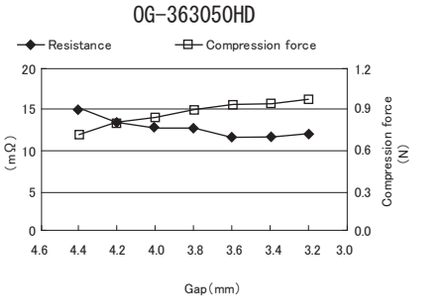

OG-363050HDR

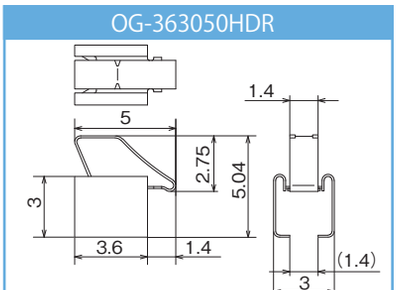

Material :Phosphor bronze for spring(t=0.1mm)
Surface treatment :Sn reflow plating
Recommended height :3.2～4.4mm

OG-363065HD

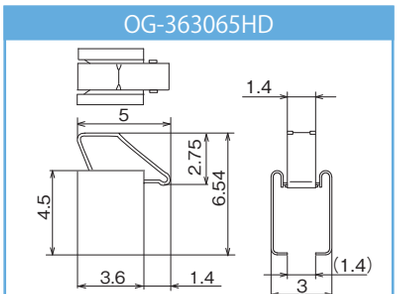

Material :Beryllium copper(t=0.1mm)
Surface treatment :Sn reflow plating(Ni plated contacts)
Recommended height :4.7～5.9mm

OG-603060

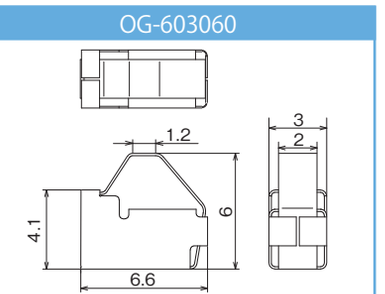

Material :Phosphor bronze for spring (t=0.12mm)
Surface treatment :Sn reflow plating
Recommended height :4.2～5.5mm

Unit:mm

Characteristics between Compression Force and Resistance

OG-363050HDR

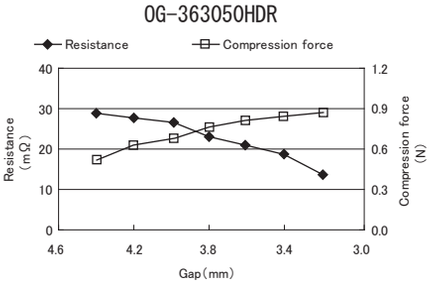

OG-363065HD

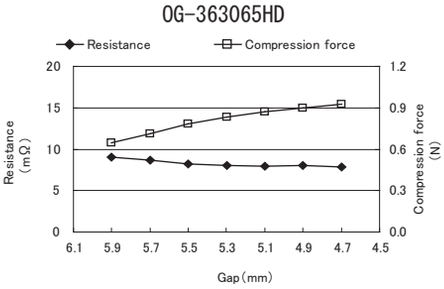

OG-603060

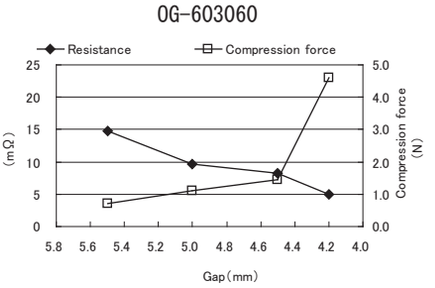

※Please confirm "Notes for Onboard series" on page 2 prior to purchase.
※The values are measured data for reference, not guaranteed.

ON-BOARD CONTACT／OG

OG-603070



Material :Phosphor bronze for spring(t=0.08mm)
Surface treatment :Sn reflow plating
Recommended height :5～6.5mm

OG-362550



Material :Phosphor bronze for spring(t=0.15mm)
Surface treatment :Sn reflow plating
Recommended height :3.6～4.5mm

OG-453060



Material :Phosphor bronze for spring(t=0.2mm)
Surface treatment :Sn reflow plating
Recommended height :4.2～5.5mm

Unit:mm

Characteristics between Compression Force and Resistance

OG-603070

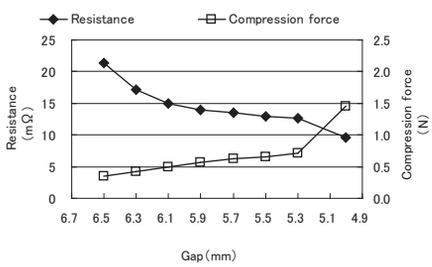

OG-362550

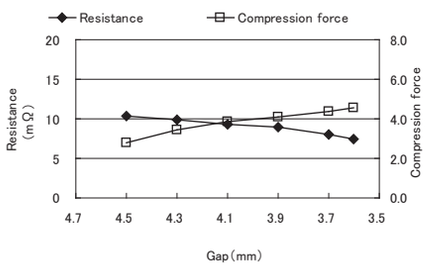

OG-453060

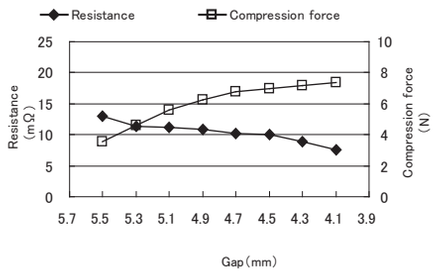

OG-453070



Material :Phosphor bronze for spring(t=0.2mm)
Surface treatment :Sn reflow plating
Recommended height :5.3～6.5mm

OG-453048



Material :Phosphor bronze for spring(t=0.1mm)
Surface treatment :Sn reflow plating
Recommended height :2.7～4.4mm

OG-453065

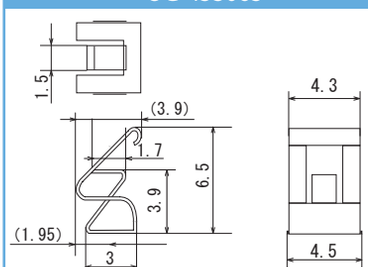

Material :Phosphor bronze for spring(t=0.15mm)
Surface treatment :Sn reflow plating.
Recommended height :4.2～6.0mm

Unit:mm

Characteristics between Compression Force and Resistance

OG-453070

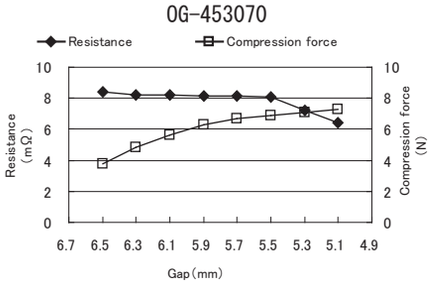

OG-453048

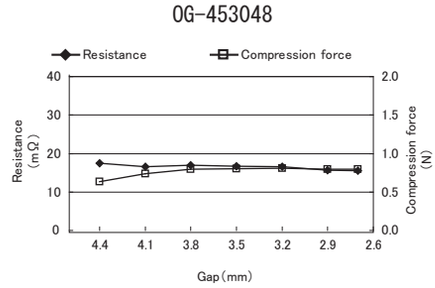

OG-453065

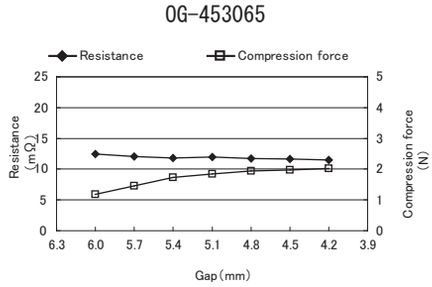

※Please confirm "Notes for Onboard series" on page 2 prior to purchase.
※The values are measured data for reference, not guaranteed.

ON-BOARD CONTACT／OG-503253-A

SMT grounding contact for engine compartment PCB

Feature

- Spring mechanism capable withstanding 10 million deflections caused by engine vibration
- Sustained conduction is secured because of unique dimple design
- Can be used under high temperature at 150℃

Material

- Beryllium cooper (t 0.12mm):

Specification

Applications	Ground contact for SMD
Recommended operating height	3.5～4.5mm
Material	Beryllium copper (t0.12mm)
Surface treatment	Sn reflow plating(Primary plating Cu)
Recommended operating temperature	−40℃～150℃

Dimensions(mm)	Pad and Mask Dimensions (The component side)(mm)	Compression force vs Electric resistance
		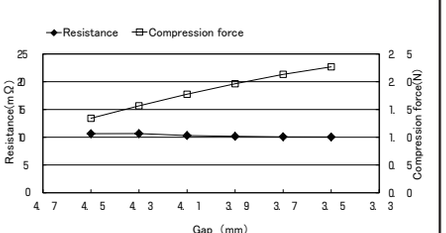

Compression test



Deflection : H=3.5mm～3.9mm
Compression count : 10 million times
Compression speed : 100 times/sec.
Test method : Hight measured and visual check after compressed 3.5mm～3.9mm deflections for 10 million times.

	Before	After
External status		
Heigh t(mm)	5.263	5.226
Recovery rat e(%)	—	99.7

Heat-shock test

Temperature switch : −4 0℃ / 150 ℃ (0.5 hour each)
Number of cycle : 2000 cycles
Metal plate : Aluminum(ADC12)
Test method : Sample is compressed by metal while heat is applied. After 250 cycles the DC resistance v measured.

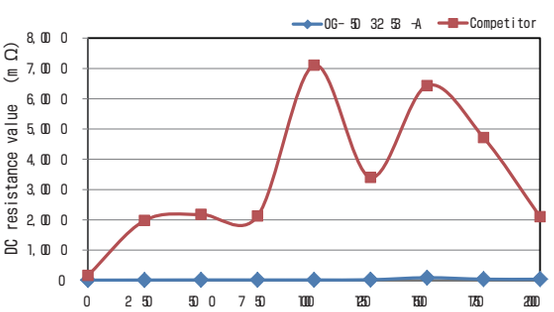

※The values are measured data for reference, not guaranteed.

SIDE CONTACT／OGSC



Automated mounting applicable component for grounding with side-contact on PC board.

Feature

- Side-contact is applicable on PC board edge against chassis.
- Grounding contact is applicable between mother PC board and vertically placed daughter board.
- OGSC-402030:Down-sized compact design has been reduced by 80% of foot print area on PCB compared with existing part.
- OGSC-756030:Structure resists deformation even during lateral sliding.

Material

- Phosphor bronze for spring (Sn reflow plating)

OGSC-402030



Unit:mm

OGSC-756030



Unit:mm

Characteristics between Compression Force and Resistance

■ OGSC-402030

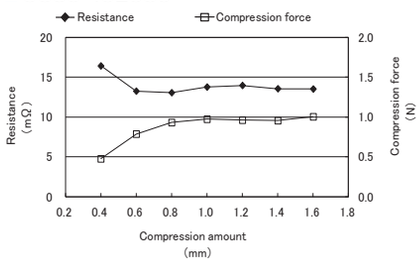

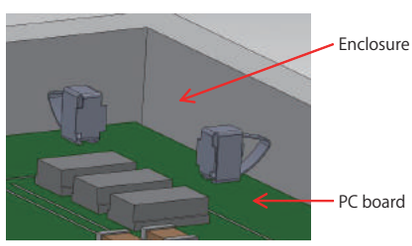

■ OGSC-756030

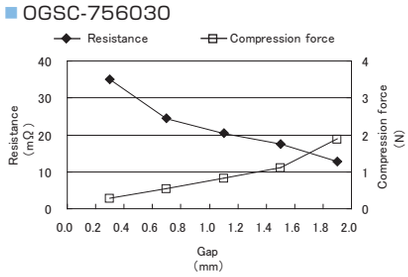

※The values are measured data for reference, not guaranteed.

ON-BOARD LUG TERMINAL／OG-R・OG-RM

Secure contact of screwed area

Feature

- FG reinforcement and reliable contact are achieved.
- Prevention of screw loosening caused by vibration.
- OG-RM is a space-saving fully-flat shape.
- OG-RM30HF provides even further space saving.

Material

- Tough pitch copper※(Sn plating)

※OG-RM26 is made of brass.



OG-RM30F



OG-RM30HF



OG-RM26



Unit：mm

OG-R26 SN



OG-R30 SN



ON-BOARD SHIELD GUIDE／OG-865028



OG-865028



Unit：mm

Displacement prevention mechanism improves grounding of shielding cans.

Feature

- Guiding mechanism makes easy installation for shielding cans.
- Applicable even at corners of shielding cans.
- Multi-point contact with the shielding can provides higher shielding effectiveness.

Material

- Phosphor bronze for spring (Sn reflow plating)

Reference Installation Specifications

Applicable plate thickness : t=1.9 or less

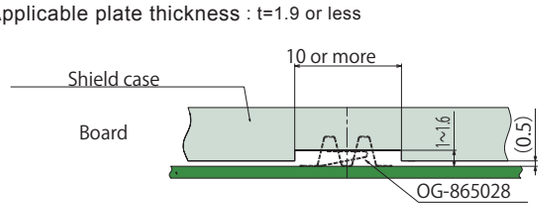



※The values are measured data for reference, not guaranteed.

ON-BOARD CLIP／OGCP



Automated mounting applicable fixture “On-Board Clip” for shielding can.

Feature

- Clip structure enables easy removal of shielding can.
- Multi-point GND is provided to shielding can. Improved shielding effect can be achieved.
- OGCP-421510:Low height design, such as 1mm height.
- OGCP-1182435:Separate structure of clip and support portion resistant to side slide loading.
- OGCP-702020:Locking structure provides “click feel” on installation.
  It provides certainty and improved workability.

OGCP-421510



Material : Phosphor bronze for spring
Surface treatment : Sn plating
Applicable thickness : t=0.15±0.03

OGCP-650813R



Material :Phosphor bronze for spring
Surface treatment : Sn reflow plating
Applicable thickness : t=0.15～0.2

OGCP-650813G



Material :Titanium Copper alloy
Surface treatment : Partial Au plating(Ni plated contacts)
Applicable thickness : t=0.15±0.03

OGCP-1182435



Material : Phosphor bronze for spring
Surface treatment : Sn reflow plating
Applicable thickness : t=0.3±0.02

OGCP-702020



Material :Phosphor bronze for spring
Surface treatment : Sn reflow plating
Applicable thickness : t=0.3±0.02

OGCP-702020G



Material :Phosphor bronze for spring
Surface treatment : Partial Au plating
Applicable thickness : t=0.3±0.02

※Suffix "G" means Au plating. Please contact our sales representatives for details.

Installation example：OGCP-702020(G)

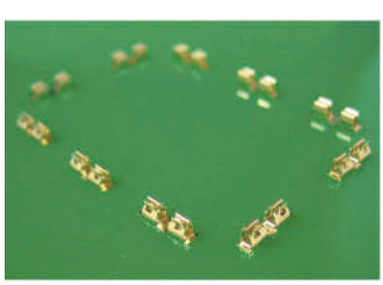

Before shielding can installed

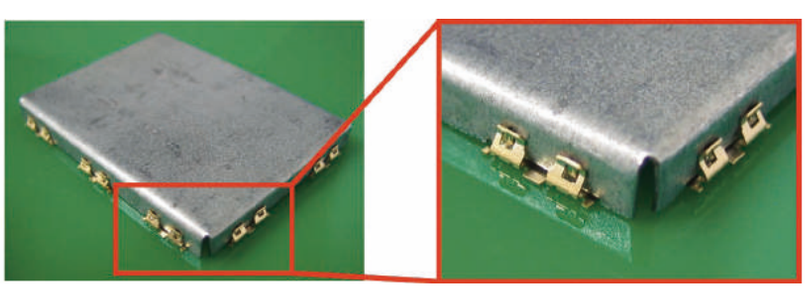

After shielding can installed

※※Shielding can fixing is not guaranteed if the clip only is used.
※Verification of actual use conditions is required prior to use,since resistance against drop impact varies according to the weight of the shielding can.
※Please confirm “Annotation” on the last page prior to purchase.

COIL ON-BOARD CONTACT／OGSR

Durable components for grounding against vibrations and repeated compressions

Feature

- Durable components for grounding against repeated compressions.
- Products with wide range of use.

Material

- Piano wire(Φ0.45)(Au plating)
- Brass(t=0.3mm)(Sn reflow plating)

OGSR-506060



Recommended height :4.5～5.5mm

OGSR-506080



Recommended height :5.0～7.5mm

Unit：mm

Characteristics between Compression Force and Resistance

OGSR-506060



OGSR-506080



※Please confirm "Notes for Onboard series" on page 2 prior to purchase.

ON-BOARD PLATE／OGP



OGP configuration ensures reliable contact

Feature

- OGP solves contact failure problems caused by solder flux.
- Reliable contact is provided at FG reinforcement of PC board.

Material

- Brass (OGP-3216 / Au plating , OGP-4520 / Sn reflow plating)

OGP-3216



OGP-4520



Unit：mm

Application examples



●Effective contact
・OGP protects PC board from damage such as circuit pattern damage by vibration etc at FG area.
・Gold plating is available at the required location on PC board.



●Alternative components to washers and lug terminals
・More compact than conventional lug terminals.
・OGP prevents loosening of screws when subject to vibration.

ON-BOARD CLAMP／OGC



Compact cable clamp applicable to automated mounting on PC board.

Feature

- Supporting wire harness on PC board.
- Side and top insertion types are available.
- Automated mounting and reflow soldering onPC board are applicable without boring.
- Wiring on PC board edges is available which brings space saving of equipment design.

Material

- Phosphor bronze for spring (Sn reflow plating)

OGC-331610

Applicable harness diameter : ϕ0.8

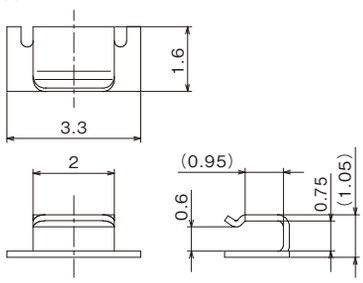

OGC-311510U

Applicable harness diameter : ϕ0.8

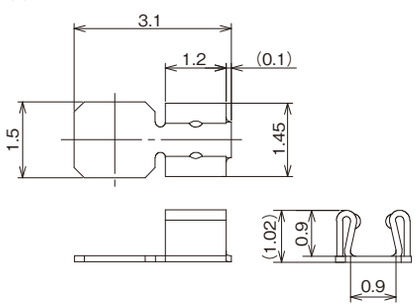

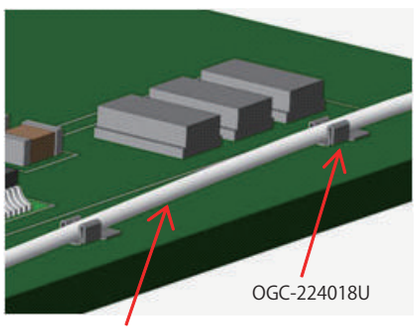

OGC-224018U

Applicable harness diameter : ϕ1.3～1.4

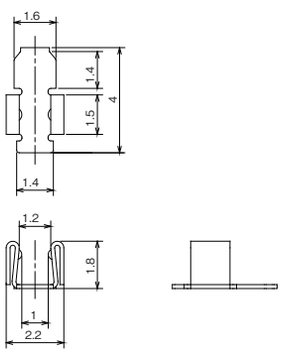

OGC-331612

Applicable harness diameter : ϕ0.86

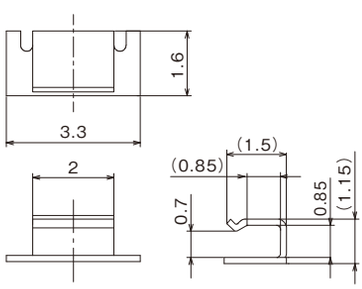

Unit：mm

※Please confirm "Notes for Onboard series" on page 2 prior to purchase.

ON-BOARD CONTACT／OG-321605



Grounding components applicable to narrow clearance

Feature

- It is surface mount components with space-saving and low contact pressure.
- It enables high restorability and contributes to low height design of the equipment.
- Applicable clearance 0.35 mm or less.

Material

- Basis material: Phosphor bronze for spring (t0.1mm)
- Surface treatment:Sn reflow plating (Underlying Cu plating)

■ Properties

● Compression force vs Electric resistance



● Dimensions



● Recommended pad design (mounting surface side top view)

<Pad design>



<Mask design>



● Application





Reference

■ Metal grouping (reference)

※Galvanic corrosion may occourby contact with other metals.

anode			
Group Ⅰ	Group Ⅱ	Group Ⅲ	Group Ⅳ
Mg	Al	Cd plating	Brass
Mg alloy	Al alloy	carbon steel	stainless steel
Al	Zn・Zn plating	Fe	Be-Cu
Al alloy	Cr plating	Ni-Cr plating	Cu, Cu alloy
Zn・Zn plating	Cd plating	Sn・Sn plating	Ni-Cu alloy
Cr plating	carbon steel	Sn・Pb solder	Monel
	Fe	Pb	Ag
	Ni, Ni plating	Brass	Graphite
	Sn, Sn plating	stainless steel	Rb
	Sn・Pb solder	Be-Cu	Ti
		Cu, Cu alloy	Pt
		Ni-Cu alloy	Au
cathode			

EMC GROUNDING

For CABLES

Plastic clamps with grounding function

Clamps

P16

FG CLAMP

P16

FG CLAMP

For BOARDS, ENCLOSURES

Plastic fasteners with grounding function

Spacers

P17

FG SPACER

P17

FG EDGE SPACER

Guide rail for PC boards

P18

FG GUIDE RAIL

Metal grounding components

Straps

Wire mesh

P18

FG MESH

FG CLAMP／FGC

Plastic fastening and reliable copper foil grounding is provided simultaneously.

Feature

- Plastic body enables conductive layer to fit the cable and provides stable effectivity.
- Conductive area employs highly reliable copper foil.
- Plastic materials prevent the clamp from damaging the cable.

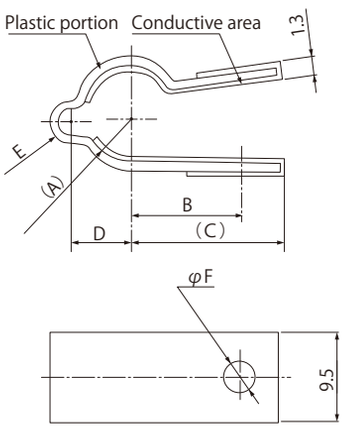

Material

- Plastic portion / nylon 66（light gray / UL94V-0）
- Conductive area / Copper foil

■ M3 screw assembly type

Unit：mm

Part No.	(A)	B	(C)	D	E	F	Applicable cable diameter
FGC-3	R1.8	9.5	13.5	3.0	R1.5	φ3.2	φ2.7～φ3.5
FGC-5	R3.0	10.7	14.7	4.3	R2.0		φ5.0～φ5.5
FGC-8	R4.8	12.5	16.6	6.5	R2.3		φ8.2～φ9.0

■ M4 screw assembly type

Unit：mm

Part No.	(A)	B	(C)	D	E	F	Applicable cable diameter
FGC-3 M4	R1.8	9.5	13.5	3.0	R1.5	φ4.2	φ2.7～φ3.5
FGC-5 M4	R3.0	10.7	14.7	4.3	R2.0		φ5.0～φ5.5
FGC-8 M4	R4.8	12.5	16.6	6.5	R2.3		φ8.2～φ9.0

FG CLAMP／FGCS

FG function combined wiring clamps

Feature

- Part numbers reduced through the integration of the plastic clamp and the metal FG component.
- Plastic and metal portions can be separated for disposal.
- Easily detachable cables allow improvement for maintenance.

Material

- Plastic portion / nylon 66（Natural / UL94V-0）
- Metal portion / Phosphor bronze (Sn plating)



Installation specifications

- Board thickness : t0.8～1.6
- Hole diameter : $\phi 4.8^{+0.2}_{0}$

Unit：mm

Part No.	(A)	(B)	C	(D)	Applicable cable diameter
FGCS-5	7.0	23.3	5.5	5.7	φ5.0～φ5.5
FGCS-8	9.5	27.5	8.5	8.7	φ7.0～φ8.5

FG SPACER／FGS

Screw free fixing spacer is combined with EMC grounding function.

Feature

- Grounding at the center of the PC board is easily achieved.
- Suitable for total cost downsizing through high workability and reduction of part numbers.

Material

- Plastic portion / PPHOX（Black / UL94V-0）
- Metal portion / Phosphor bronze (Sn plating)

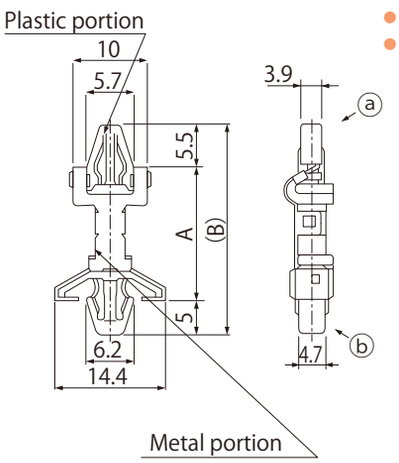

Installation specifications

- ⓐ：Board thickness／t＝1.6～2.0mm
  Hole diameter／$\phi 4.0^{+0.1}_{0}$ mm
- ⓑ：Board thickness／t＝1～2.0mm
  Hole diameter／$\phi 4.8^{+0.1}_{0}$ mm

Unit：mm

Part No.	A	(B)
FGS-3S	9.8	20.3
FGS-4S 1	11.4	21.9
FGS-6S	14.4	24.9
FGS-8S	17.7	28.2
FGS-9S	20.0	30.5

FG EDGE SPACER／FGES-10

EMC grounding function is added to the spacer whose specialty lever system enables easy fixing and removal of PC board.

Feature

- Easy fixing, opening and closing of PC board are provided as well grounding function.
- The flux which is on the metal contact surface on the chassis side can be removed when fixing.
- High workability and reduction of part numbers enable total cost downsizing.

Material

- Plastic portion / PA66（Color：Black / Flammability：UL94V-0）
- Metal portion / Phosphor bronze (Sn reflow plating)



Installation specifications



ⓐ Board side : t1.6±0.15



ⓑ Chassis side : t0.8～2.3

Unit：mm

FG GUIDE RAIL／FGR-80WSP

Grounding function added to the PC board guide rail

Feature

- Contact fingers of the guide sandwiches the PC board so that grounding is achieved from either top or bottom face.
- Spherical profile of the contact area prevents any damage to the PC board pattern.
- Assemble using M3 screws or nylon rivets.

Material

- Plastic portion / Polycarbonate (Black / UL94V-2)
- Metal portion / Phosphor bronze (Sn plating)



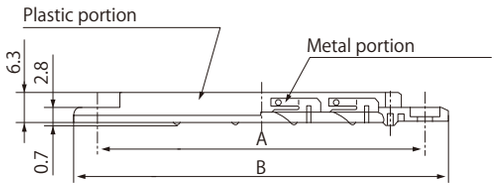

Installation specifications



Unit：mm

Part No.	A	B
FGR-80WSP	70	80

FG MESH／FGM

Metal mesh employed EMC grounding material

Feature

- Excellent flexible structure comprises metal wires braided into a cylinder mesh, coated with insulator.
- Large surface area of conductive mesh provides excellent impedance characteristics in the high frequency range.

Material

- Mesh / Tinned copper wire
- Terminal / Round terminal
- Coating / Heat shrink tube (black)

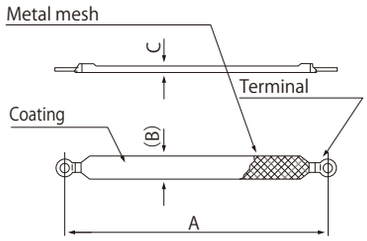

■ M3 screw assembly type

Unit：mm

Part No.	A	(B)	C
FGM-50-M3	50	8.5	2.5
FGM-100-M3	100		
FGM-150-M3	150		
FGM-200-M3	200		

■ M4 screw assembly type

Unit：mm

Part No.	A	(B)	C
FGM-50-M4	50	8.5	2.5
FGM-100-M4	100		
FGM-150-M4	150		
FGM-200-M4	200		

※Please contact our sales department for sizes outside of those specified.

ELECTROMAGNETIC WAVE MANAGEMENT SHEET

ELECTROMAGNETIC NOISE SUPPRESSION SHEETS

Near field EMI suppression with easy assembly. Simply attach, sandwich and wrap around

Magnetic metal filler type
Heat resistance upto 150°

Soft ferrite

Ferrite sheet

Thermal conductivity

P23


MG ABSORPTION SHEET

P22

EMI ABSORPTION SHEET

P24


SMARTPLY®

P25

COOLPROVIDE®

FERRITE SHEET For WIRELESS CHARGING

Suitable for improvement of wireless charging efficiency and its shielding of leakage magnetic field.

Ferrite sheet

P26


SMARTPLY®

FERRITE SHEET For RFID/NFC

Improvement of the communication efficiency of RFID/NFC(13.56MHz)

Ferrite sheet

P27


SMARTPLY®

ELECTROMAGNETIC NOISE SUPPRESSION SHEET

Effective suppression of electronic equipment noise

Feature

- Noise is easily suppressed with the simple assembly. Attach, sandwich and wrap around.
- Broad range of variations, sheet, core, heat-conductive types etc.
- Custom cutting and secondary processing are available.

Noise damping

Noise level is lowered by loss effect of magnetic substance,
with smaller reflection suffered by conductive shielding materials.

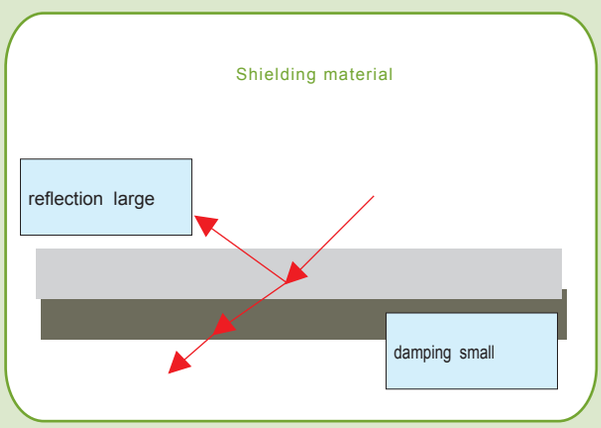

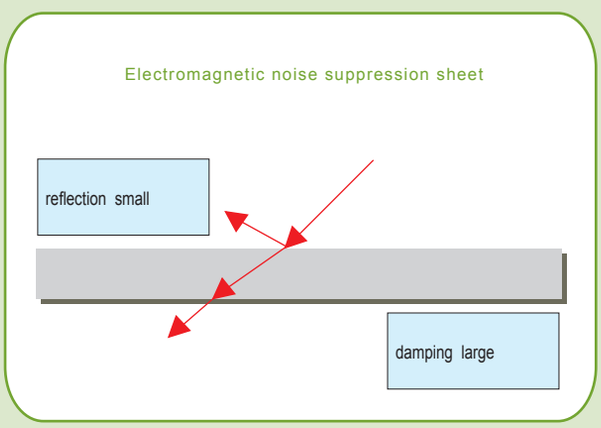

Suppression of antenna effects decreases the noise.

Radiation noise is emitted by cables or patterns acting as an antenna.
The magnetic substance reduce the noise by minimizing such antenna effects.

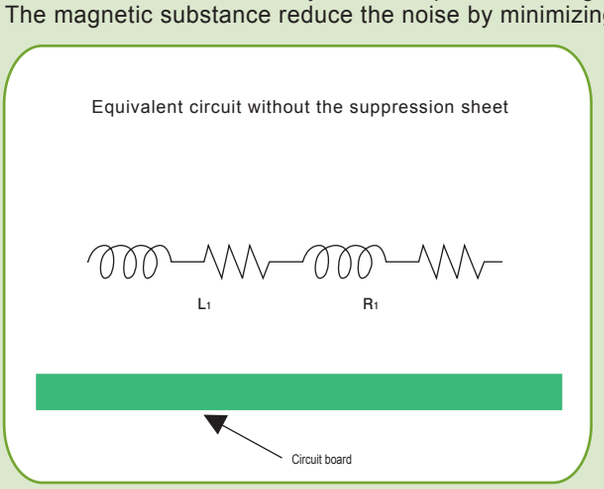

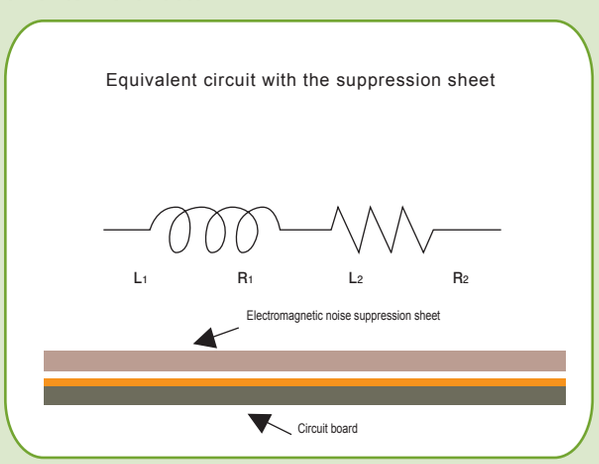

ELECTROMAGNETIC NOISE SUPPRESSION SHEET

Electromagnetic Noise Suppression Sheets

Sheet



MAB / MG-03A

Flexible resin based product has a wide range of applications.

Electromagnetic noise suppression sheet



EMPV4

Electromagnetic noise suppression sheet with high permeability and posible thermal management.

Ferrite sheet



FFS/FFSX-H/FFSW

Achieve a good balance between thinned ferrite and high-performance with the new manufacturing process.

Property comparison (reference)

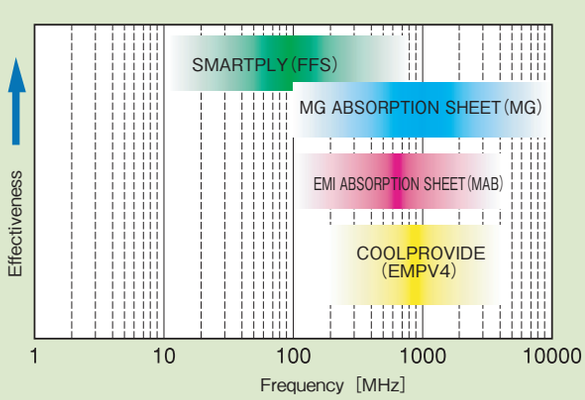

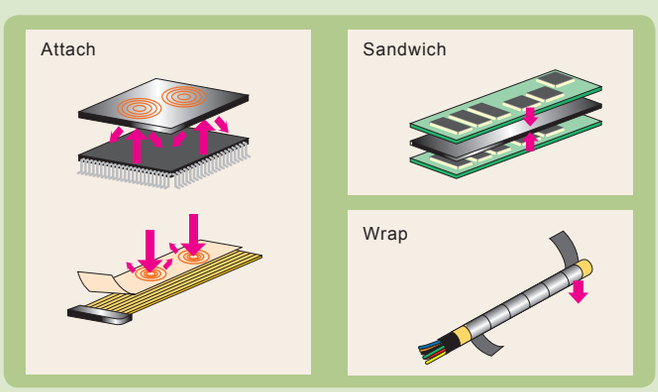

EMI ABSORPTION SHEET／MAB

Flexible sheet consists of resin with soft ferrite filler

Feature

- Sheet thickness, 0.4 - 4.0mm are available.
- Flexible and easy handling.

Material

- Soft ferrite + resin

Part No.	MAB-03
(mm)※ Thickness	0.4/1.0/2.0/4.0
(Ω·cm) Volume resistivity	10^{12}
Flame resistance	UL94V-0※
Material	Soft ferrite + resin
Feature	Various thickness

※Adhesive tape not included

Properties

Permeability

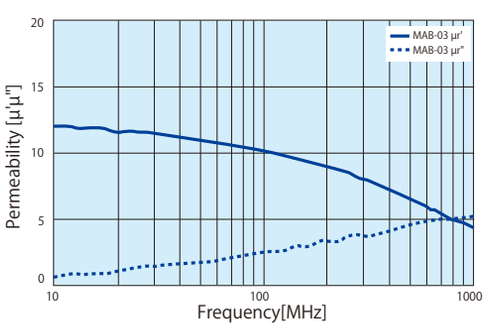

※The values are measured data for reference, not guaranteed.

Reflection loss

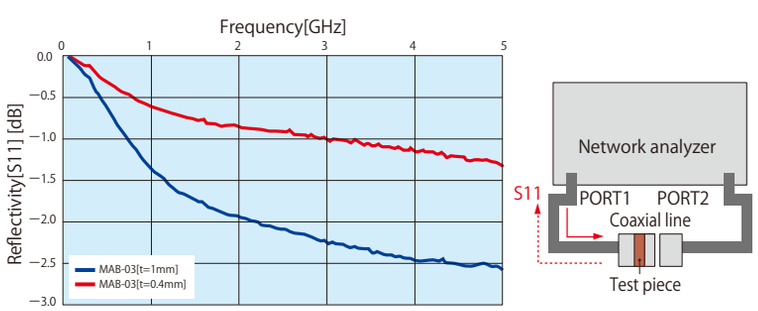

Transmission loss

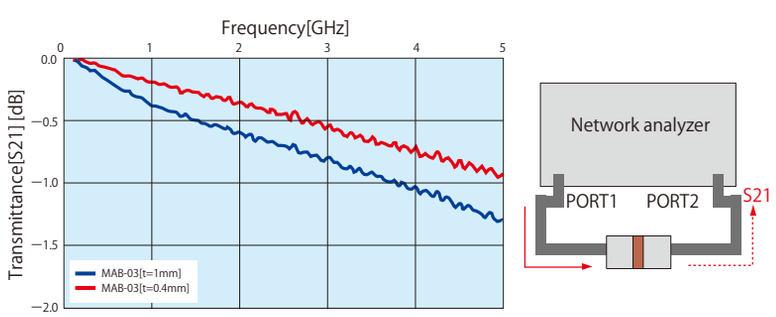

MG ABSORPTION SHEET／MG-03A



High performance type mixed with magnetic metal filler

Feature

- Excellent processability, with secondary processing provided to fit the specific application.

Material

- Refer to the table below.

Variations

Part No.	MG-03A
(mm)／Thickness※	0.5/1.0
(μr')／Permeability	25/10MHz
Ω·cm) Volume resistivity	10^7
Flame resistance	Equivalent to UL 94 HB
Material	Magnetic metal material + rubber

※Adhesive tape not included

MG-03A

Heat-resistance has been improved up to 150℃.

- Heat-resistant rubber based material enables application at wide range of temperature from -40 to 150℃.
- No chlorine or bromine materials are used.

■ Permeability

MG-03A Series



■ Reflection loss

MG-03A Series





■ Transmission loss

MG-03A Series





※The values are measured data for reference, not guaranteed.

SMARTPLY／FFS



High performance ferrite sheet achieves excellent noise suppression simply by affixing it to desired areas.

Feature

- Excellent noise suppression in low frequency range compared to metal filler electromagnetic noise suppression sheet.
- Heat resistant tape allows application for areas where temperature can be elevated.
- Excellent insulation property due to its sintered body.

Material

- PET with adhesive layer
- Ferrite sheet
- Double-sided adhesive tape



A,B：Soft ferrite
C,D：Profile(PET with adhesive layer)

①PET with an adhesive layer
②Ferrite sheet
③Double-sided adhesive tape

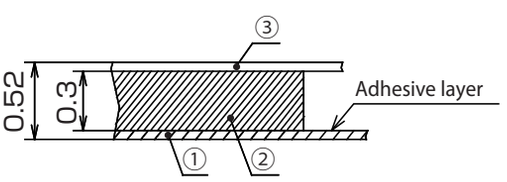

Dimensions

Unit：mm

Part No.	A	B	C	D
FFS-0.3-1010T	10	10	11.5	11.5
FFS-0.3-1020T		20		21.5
FFS-0.3-1515T	15	15	16.5	16.5
FFS-0.3-2020T	20	20	21.5	21.5
FFS-0.3-2030T		30		31.5
FFS-0.3-2525T	25	25	26.5	26.5
FFS-0.3-3030T	30	30	31.5	31.5
FFS-0.3-5050T	50	50	55	55

※Custom designs available.
Please contact our sales representative for further information.

Properties

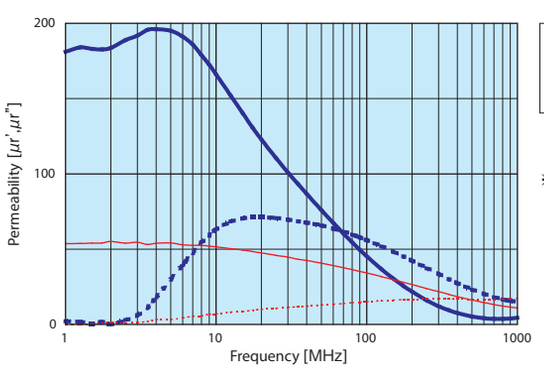

※The values are measured for reference, not guaranteed.

Application

■ EMC suppression for IC

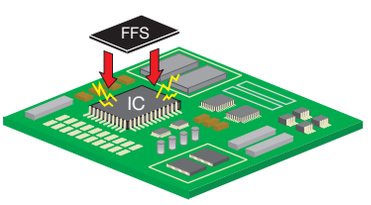

Mounting FFS onto IC device

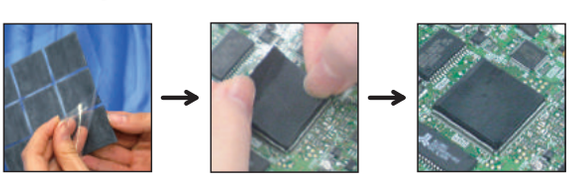

Gently bend the liner while take the ferrite sheet off.

※It is not advisable to reuse the product once it is removed.



Electromagnetic noise suppression sheet with high permeability and posible thermal management

Feature

- Lower hardness(ASKER C40), high permeability(μ'=13) was realized as non silicone thermally conductive sheet.
- Due to lower hardness, it enables intimate contact and low load to the element while in mounting.
- Because of a non-silicon material, siloxane is not contained.
- Recommended operating temperature range is -40℃～110℃.

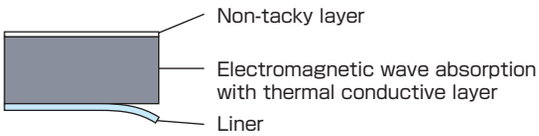

※The values are measured data for reference, not guaranteed.

Part No.	EMPV4
Thickness	1.0／1.5／2.0
(W/m･K) Thermal conductivity	1.5
Hardness	40
(at 10MHz) Permeability	13
(Ω･cm) Volume resistivity	1.0×10^{12}
Color	Black
Flammability	Equivalent to V-0

SMARTPLY／FFSW



Thinner and flexible ferrite sheet for wireless charging

Feature

- It is higher permeability magnetic sheet which is suitable for magnetic shield and improving performance of wireless charging system according to international standard around 100kHz such as Qi standard.
- Sintered ferrite material with flexibility enables higher drop impact resistance.
- Suitable for thinner design of module. (Total thickness of product: 0.21mm)
- Custom profile is available upon request.

Material

- PET with adhesive layer
- Ferrite sheet
- Double-sided adhesive tape

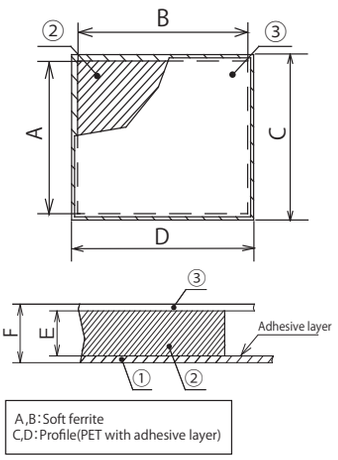

Unit：mm

Part No.	A	B	C	D	E	F
FFSW-0.1-5060T	50	60	52	62	0.1	0.21

※Custom designs available. Please contact our sales representative for further information.

Properties

■ Permeability

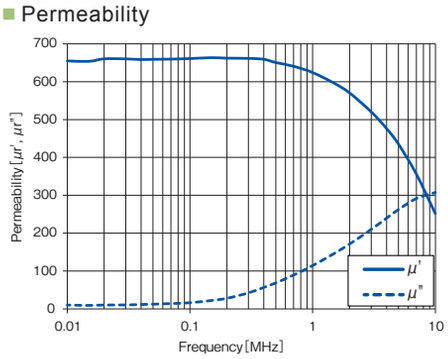

Application

■ Wireless charging system

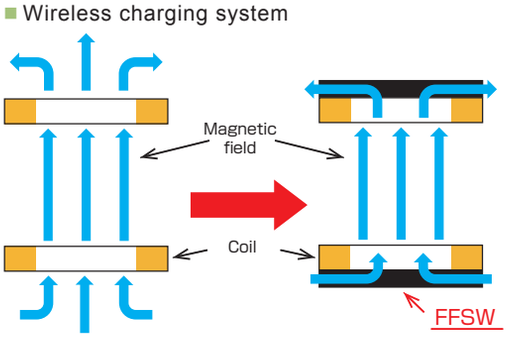

・Magnetic field generated in charge is shield, and do not affect the other elements.
・It is improved magnetic rotation and charging efficiency, too.

■ Charging efficiency between antennas.

◆**Test specification**

Operating frequency	100kHz
Gap between two antennas	10mm
Antenna size	φ50mm



◆**Measurement results**

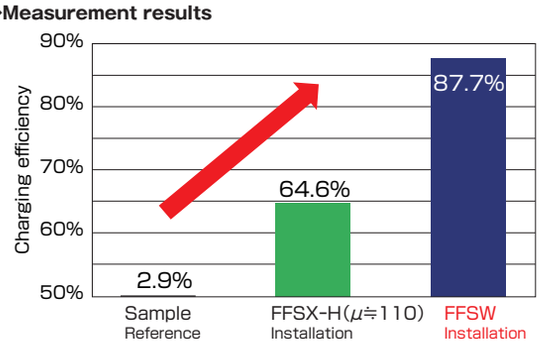

Charging efficiency is improved !!

※The values are measured data for reference, not guaranteed.



RFID・NFC(13.56MHz)

Ferrite sheet for metal interference solution for RFID and NFC (13.56MHz).

Feature

- Improve the communication performance of RFID reader and tag by suppressing the metal interference.
- Ferrite material in which Q factor has been maximized at 13.56MHz is used for the sheet.
- Sintered material but thin with excellent in flexibility that enables easy design of custom profiles.

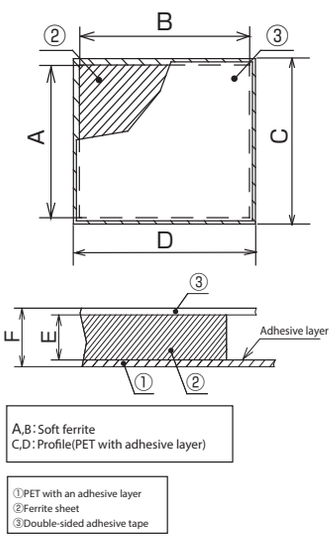

Material

- PET with adhesive layer
- Ferrite sheet
- Double-sided adhesive tape

Dimensions

Unit：mm

Part No.	A	B	C	D	E	F
FFSX-0.1H-5060T	50	60	51.5	61.5	0.1	0.21
FFSX-0.2H-5060T					0.2	0.31
FFSX-0.3H-5060T					0.3	0.41

※Custom designs available. Please contact our sales representative for further information.

Properties

■ Permeability

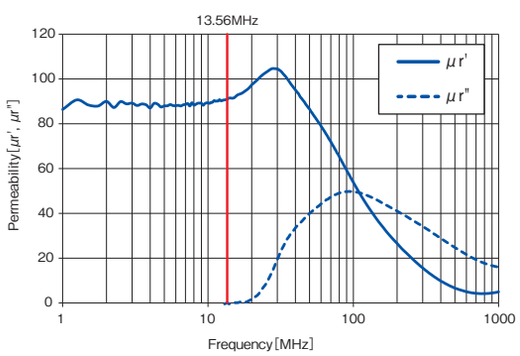

Application

■ Contactless IC smart card system

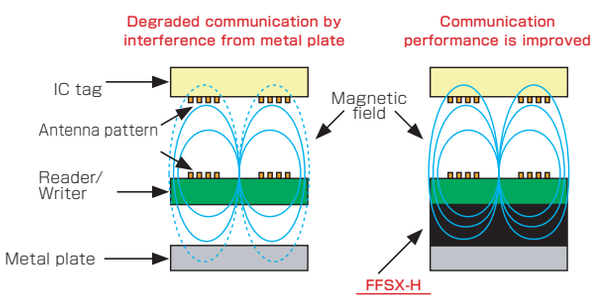

※The values are measured data for reference, not guaranteed.

■ Coupling loss between antennas

◆Test specification

Antenna

Size	31×42mm(Inner diameter)
Number of turn	3turns
Gap between antennas	3mm
Gap to metal plate	1mm

Magnetic substance

Size	50×60mm
Gap to antenna	0mm(Contact)
Thickness	FFSX-0.3H:t0.3mm
	FFS-0.3:t0.3mm



◆Receiving field strength measurement

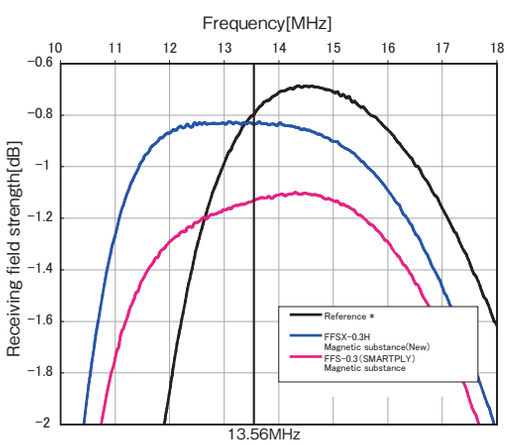

FERRITE CORE PRODUCTS

TOROIDAL / SLEEVE TYPE

Provided with plastic housing and fixtures for labor-saving assembly

Sleeve cores with plastic housing

Split type

SLEEVE FERRITE CLAMP

HIGH μ FERRITE CLAMP

LOW CUT FERRITE CLAMP

Heat resistant type

LOW CUT FERRITE CLAMP

Heat resistant type

SLEEVE FERRITE CLAMP

LOW CUT FERRITE CLAMP

Toroidal cores with plastic housing

Split type

TOROIDAL FERRITE CLAMP

TOROIDAL FERRITE CLAMP

TOROIDAL FERRITE CLAMP

SLEEVE FERRITE CLAMP

Sleeve cores

Non Split type

SLEEVE CORE

GRIP CORE

RIB CORE

Toroidal cores

Non Split type

TOROIDAL CORE

TOROIDAL CORE

TOROIDAL CORE WITH HOUSING

TOROIDAL CORE

LOW CUT CORE TOROIDAL CORE

LOW CUT CORE

LOW CUT CORE (High μ type)

FLAT TYPE

For a flat cable and FPC

Flat cores

Non Split type

GFPC CORE

FLAT CORE

Split type



FLAT CORE

SPLIT FPC CORE

OPEN CIRCUIT CORE

Smartply

SMARTPLY

Flat cores with resin clamp

Split type

BLOCK CORE

Split type



FLAT CORE

Others

Other ferrite

METAL CORE

RADIATION NOISE ELIMINATION FILTER

SMD COMMON MODE FILTER

CHIP BEADS FILTER

FERRITE CORE SELECTION CHART

Low-frequency noise suppression cores (0.1MHz～30MHz)	Split ferrite clamp type	Flame retardant class, V0	LOW CUT FERRITE CLAMP/MRFC	p.34
		Heat resistance 125℃	LOW CUT FERRITE CLAMP/RFC-MA	p.33
			LOW CUT FERRITE CLAMP/RFCW-13MA-BK-1PC	p.47
		Large size	LOW CUT FERRITE CLAMP/MRFC-H40	p.34
	Non split type	With coating	LOW CUT CORE/TRM	p.45
			LOW CUT CORE(High μ type)/TRMH	p.46
		With resin case	TOROIDAL CORE/TRCB	p.44
Intermediate-frequency noise suppression cores (3MHz～300MHz)	Split ferrite clamp type	Flame retardant class, V0	High μ FERRITE CLAMP/KRFC	p.31
			SLEEVE FERRITE CLAMP/ RFC-H13、RFC-20	p.32
		Heat resistance 125℃	SLEEVE FERRITE CLAMP/RFC-A	p.37
	Non split type	With coating	TOROIDAL CORE/KTR	p.56
High-frequency noise suppression cores (30MHz～1GHz)	Split ferrite clamp type	Flame retardant class, V0	SLEEVE FERRITE CLAMP/GRFC	p.32
			TOROIDAL FERRITE CLAMP/GTFCK GTRCR GTFC	p.35 p.35 p.36
		Heat resistance 125℃	SLEEVE FERRITE CLAMP/RFC-A	p.37
			SLEEVE FERRITE CLAMP/RFCW-C10-A-BK-1PC	p.47
	Split block type	With clamp	BLOCK CORE/BCN	p.54
	Split single type	Single type with no coating	FLAT CORE/GSSH	p.51
			SPLIT FPC CORE/GFPH	p.52
			OPEN CIRCUIT CORE/GFPO	p.52
	Non split type	Single type with no coating	TOROIDAL CORE/GTR GTRE	p.41 p.43
			SLEEVE CORE/GRI	p.39
			FPC CORE/GRIB	p.40
			FPC CORE/GFPC	p.48
			FLAT CORE/GSSC	p.50
		With resin case	TOROIDAL CORE/GTRCA	p.44
		Elastomer with bracket	GRIP CORE/GRIP	p.40
Thin flexible cores (100MHz～3GHz)	Split PET films	Tape fixing	SMARTPLY/FFPC	p.53
High performance core for saturation current (3MHz～300MHz)	Non split type	With coating	METAL CORE/MPTR	p.57
Common mode filter (30MHz～3GHz)	SMD type		SMD COMMON MODE FILTER/KWCM KWCM-HS KWCM-HDMI	p.59 p.61 p.62

APPLICABLE FREQUENCY CHART FOR NOISE SUPPRESSION

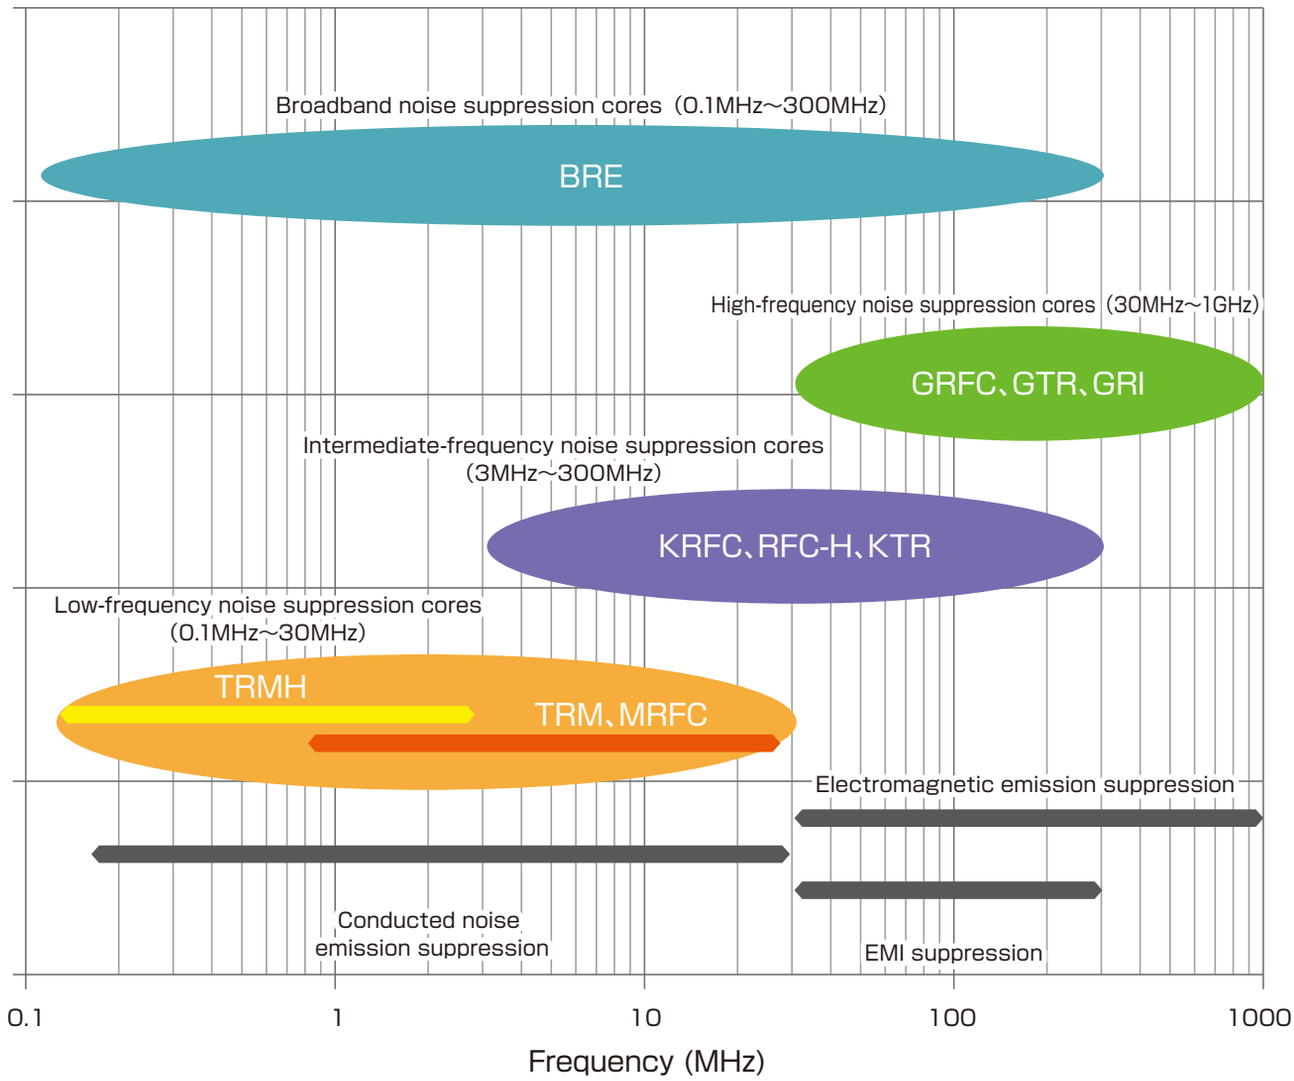

HIGH μ FERRITE CLAMP／KRFC

Split ferrite clamp for intermediate frequency range from 3 to 50MHz.

Feature

- Effective for suppression both of conducted noise up to 30MHz and radiated noise over 30MHz.
- Split ferrite clamp with plastic housing enables to attach assembled cable and cables with connector.
- Cable tie can assist to hold electric wires and enables the product to be fixed to wire harness. (Excluding KRFC-4)
- Wire guiding system prevent wires from being pinched when winding assembly.

Material

- Ferrite Core：Soft ferrite
  Housing：PA66　(Color：natural／Flammability：UL94V-0)

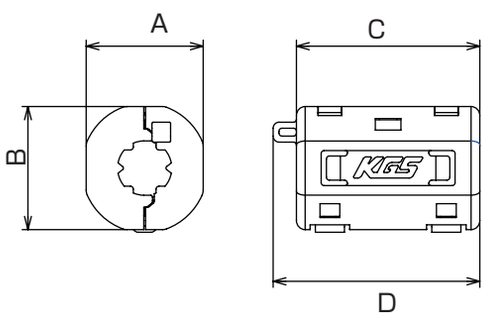

Unit：mm

KRFC-4	13.7	13.5	27.5	–	φ3.5～4.5	≧ 70
KRFC-6	18.1	18.4	31.5	35.5	φ5.5～6.5	≧ 110
KRFC-8	20.1	20.4	31.5	35.5	φ7.5～8.5	≧ 80
KRFC-9	20.1	20.4	31.5	35.5	φ8.5～9.5	≧ 80
KRFC-10	26.3	26.4	32.4	37.2	φ9.5～10.5	≧ 120
KRFC-13	29.1	29.4	31.5	36.3	φ12.5～13.5	≧ 105

Impedance vs frequency

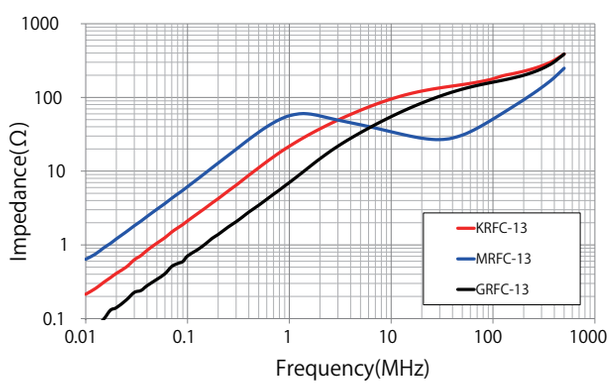

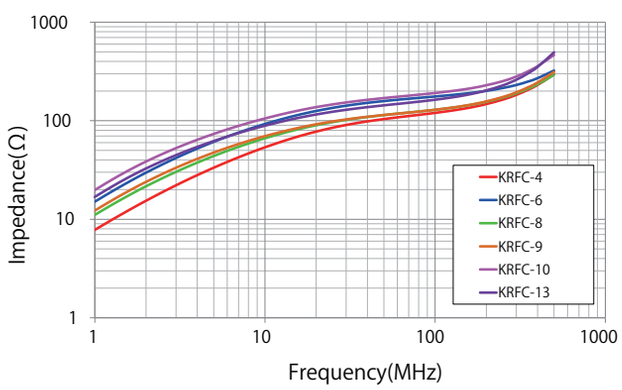

※The values are measured data for reference, not guaranteed.

SLEEVE FERRITE CLAMP／GRFC ／ RFC

RFCK2-20 (RFC-20 with mounting fixture is available. Contact us for the details.)

Fair-Surface type with no protrusion of snap or hinge parts

Feature

- Split ferrite cores with plastic housing for easy fixing on assembled cables or cables with connectors.
- Cable tie can assist to hold electric wires and enables the product to be fixed to wire harness. (Excluding GRFC-3/4,RFC-H13,RFC-20)
- Wire guiding system prevents wires from being pinched when winding assembly.

Material

- Ferrite Core：Soft ferrite
  Housing：PA66 (Color：Light gray／Flammability：UL94V-0)
  (Color：Black／Flammability：UL94V-2)

※ Black type has "BK" at the end of the part number.

※RFC-H13, RFC-20 have different configurations. Contact us for the details.

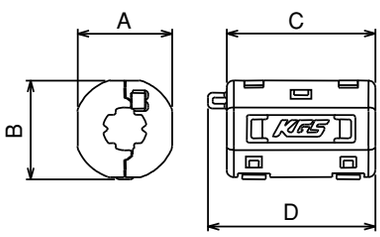

Unit：mm

Part No.	A	B	C	D	Applicable cable diameter	Impedance* Ω/100MHz (1 turn)
GRFC-3	13.7	13.5	18.0	–	φ3.0～4.0	≧ 35
GRFC-4	13.7	13.5	27.5	–	φ3.5～4.5	≧ 75
GRFC-5	18.1	18.4	31.5	35.5	φ4.5～5.5	≧100
GRFC-6	18.1	18.4	31.5	35.5	φ5.5～6.5	≧100
GRFC-7	14.25	15.8	20.0	24.0	Max.φ7	≧ 45
GRFC-8	20.1	20.4	31.5	35.5	φ7.5～8.5	≧ 75
GRFC-9	20.1	20.4	31.5	35.5	φ8.5～9.5	≧ 75
GRFC-10	26.3	26.4	32.4	37.2	φ9.5～10.5	≧105
GRFC-13	29.1	29.4	31.5	36.3	φ12.5～13.5	≧ 95
RFC-H13	31.7	29.4	41.0	–	φ12.5～13.5	≧170
RFC-20	40.0	40.0	47.0	–	Max.φ20	≧180

※Contact us for the measurement conditions.

Impedance vs frequency























※The values are measured data for reference, not guaranteed.

LOW CUT FERRITE CLAMP／RFC-**MA

Ferrite clamp with excellent heat resistance, effective for prevention of conducted/radiated noise in low-frequency range

Feature

- Operating temperature: -40°C to +125°C
- Suitable for suppression of low-frequency noise (150kHz to 30MHz) of power supply system.
- Split type Ferrite Clamp, making it easy to apply to assembled wires.
- Housing with anti-slip means for cable tie around its outer side. Highly reliable because of the lock of the housing as well as the fastening of the tie. *Excluding RFC-20MA
- The material of the plastic housing is UL94V-2 certified.

Material

- Ferrite Core：Soft ferrite
  Housing：PA66　(Color：Natural／Flammability：UL94V-2)

Application

- Vehicle ECU, inverter, low-frequency noise prevention by motor drive

Specification

slip-proof for band

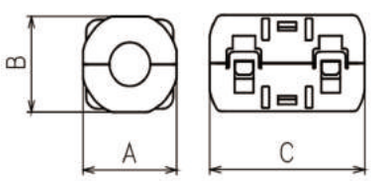

Unit：mm

Part No.	A	B	C	Applicable cable diameter	Impedance Ω/10MHz (1turn)
RFC-8MA	20.6	19.8	34.0	Max.φ8.5	≧ 20
RFC-13MA	29.6	28.4	34.0	φ12.5～ 13.5	≧ 20
RFC-20MA	40.0	40.0	47.0	Max.φ20	≧ 20

Impedance vs frequency

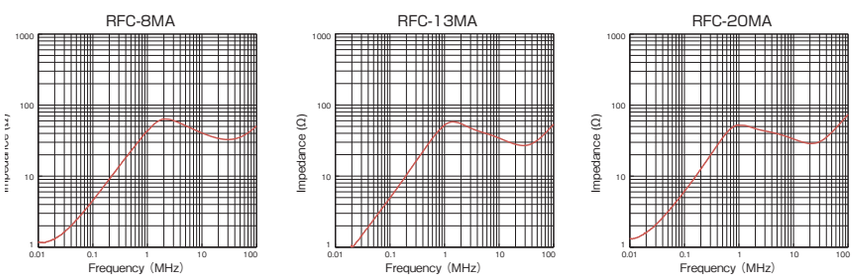

※The values are measured data for reference, not guaranteed.

LOW CUT FERRITE CLAMP／MRFC

※MRFCK2-20
※MRFCK2-20 is provided with mounting fixtures on both side.

FERRITE CLAMP for low-frequency range with UL94V-0 housing.

Feature

- Effective solutions for suppression of disturbance from switching power supply and motor.
- Due to conditioning the ferrite material, the product is suitable for suppressing low frequency noise from 150kHz to 30MHz.
- With optional mounting fixture, the product can be assembled on enclosure by M4 screw. (MRFC-13, MRFC-20)
- Fixing by M6 screw is available. (MRFC-H40)

Material

- Ferrite Core:Soft ferrite
- Housing:PA66 (Color:Light gray / Flammability:UL94V-0)
  ※MRFC-H40:PC/ABS (Color:Black / Flammability:UL94V-0)

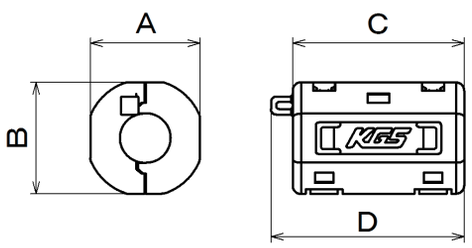

MRFC-H40

Assembly with cable tie



Split parts of top and bottom before assembly

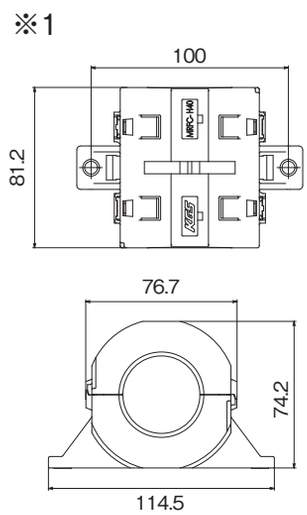

Unit：mm

Part No.	Applicable cable diameter	A	B	C	D	Impedance Ω/10MHz (1turn)
MRFC-8	Max.φ8.5	20.1	20.4	31.5	35.5	≧ 20
MRFC-13	Max.φ13.5	29.1	33.05	32.3	37.1	≧ 20
MRFC-20	Max.φ20.0	40.3	40	47	53.5	≧ 20
MRFC-H40	Max.φ40.0	Shown in dimensional drawing *1				≧ 25(1MHz)

Impedance vs frequency

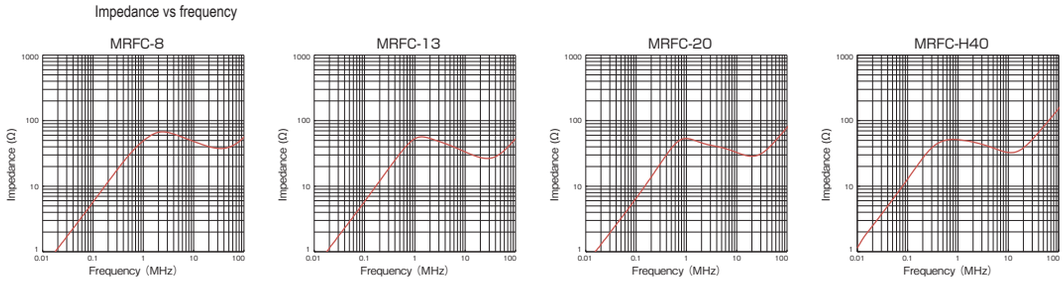

※The values are measured data for reference, not guaranteed.

TOROIDAL FERRITE CLAMP／GTFCK

Toroidal cores with easily mounting fixture on chassis

Feature

- GTFCK series, which are provided with mounting fixtures, can be assembled on chassis by using a screw.

Material

- Ferrite Core：Soft ferrite
- Housing：PA66　(Color：Light gray／Flammability：UL94V-0)

Unit：mm

Part No.	Profile	Applicable cable diameter	A	B	C	Impedance Ω/100MHz (1turn)
GTFCK-16-8-13	①	Max.φ7.2	32.5	20.4	18.9	≧ 45
GTFCK-16-8-16	①	Max.φ7.2	32.5	20.4	21.9	≧ 55
GTFCK-20-10-10	①	Max.φ8.5	37.1	24.9	16	≧ 40
GTFCK-23-11-14	①	Max.φ10.5	40.5	28.3	20.2	≧ 55
GTFCK-25-15-12	①	Max.φ13	41.2	28.9	17.8	≧ 40
GTFCK-28-16-13	①	Max.φ14.7	45.3	32.9	18.8	≧ 50
GTFCK-28-16-20	①	Max.φ14.7	45.3	32.9	25.8	≧ 70
GTFCK-41-27-16	②	Max.φ26	51.8	44.5	19.6	≧ 50

Profile ①



Profile ②



TOROIDAL FERRITE CLAMP／GTFCR

Toroidal cores with removable fixture

Feature

- Snap fastener for re-use is available for the product with fixture "GTFCR".

Material

- Ferrite Core：Soft ferrite
- Housing：PA66　(Color：Light gray／Flammability：UL94V-0)

Unit：mm

Part No.	Profile	Applicable cable diameter	A	B	C	D	Impedance Ω/100MHz (1turn)
GTFCR-16-8-16	①	Max.φ7.2	35.8	20.1	16.3	21.9	≧ 55
GTFCR-41-27-16	②	Max.φ26	55.2	44.5	23.6	19.6	≧ 50

Mount hole



Profile①

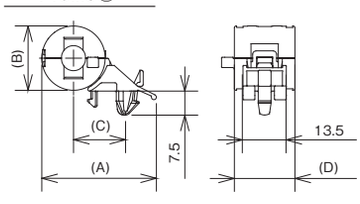

Profile②

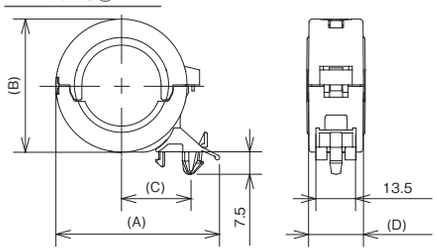

※The values are measured data for reference, not guaranteed.

TOROIDAL FERRITE CLAMP／GTFC



Toroidal design that makes cable easy to turn around it

Feature

- Split ferrite cores with plastic housing for easy fixing on assembled cables or cables with connectors.
- Cable tie can assist to hold electric wires and enables the product to be fixed to wire harness. (Excluding GTFC-41-27-16)
- Wire guiding system prevents wires from being pinched when winding assembly.

Material

- Ferrite Core：Soft ferrite
- Housing：PA66　(Color：Light gray／Flammability：UL94V-0)

GTFC-**-**-**

Profile ①



Profile ②(GTFC-41-27-16)



Unit：mm

Part No.	Profile	Applicable cable diameter	A	B	C	Impedance Ω/100MHz (1turn)
GTFC-16-8-13	①	Max.φ7.2	22.3	20.1	18.9	≧ 45
GTFC-16-8-16	①	Max.φ7.2	22.3	20.1	21.9	≧ 55
GTFC-20-10-10	①	Max.φ8.5	27.1	24.9	16	≧ 40
GTFC-23-11-14	①	Max.φ10.5	30.5	28.3	20.2	≧ 55
GTFC-25-15-12	①	Max.φ13	31.1	28.9	17.8	≧ 40
GTFC-28-16-13	①	Max.φ14.7	35.1	32.9	18.8	≧ 50
GTFC-28-16-20	①	Max.φ14.7	35.1	32.9	25.8	≧ 70
GTFC-41-27-16	②	Max.φ26	48.2	44.5	19.6	≧ 50

Impedance vs frequency

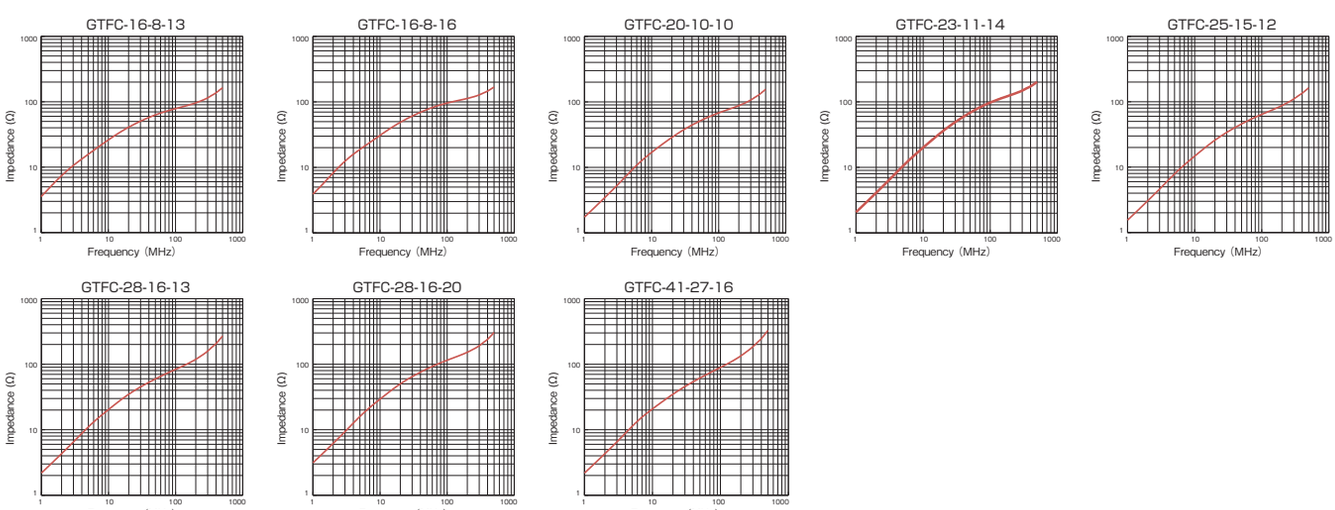

※Contact us for the measurement conditions.

FERRITE CLAMP with excellent heat resistance

Feature

- Split type Ferrite Clamp, making it easy to apply to assembled wires.
- Housing structure with anti-slip means for cable tie.
  Highly reliable because of the lock of the housing as well as the fastening of the tie.
  (※Excluding RFC-20-A)
- Operating temperature range: -40°C to +125°C.

Material

- Ferrite Core:Soft ferrite
- Housing:PA66 (Color:Black / Flammability:UL94V-2)

Housing with anti-slip-means

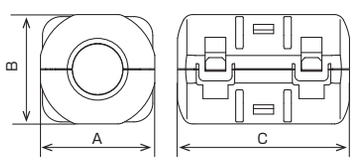

Unit：mm

Part No.	A	B	C	Applicable cable diameter	Impedance* Ω/100MHz (1turn)
RFC-6-A	18.5	18.1	34.0	Max.φ6.0	≧ 135
RFC-8-A	20.6	20.1	34.0	Max.φ8.5	≧ 120
RFC-9-A	22.6	21.7	34.0	Max.φ9.5	≧ 125
RFC-H13-A	31.7	29.4	41.0	Max.φ13.5	≧ 170
RFC-20-A	40.0	40.0	47.0	Max.φ20	≧ 180

Impedance vs frequency

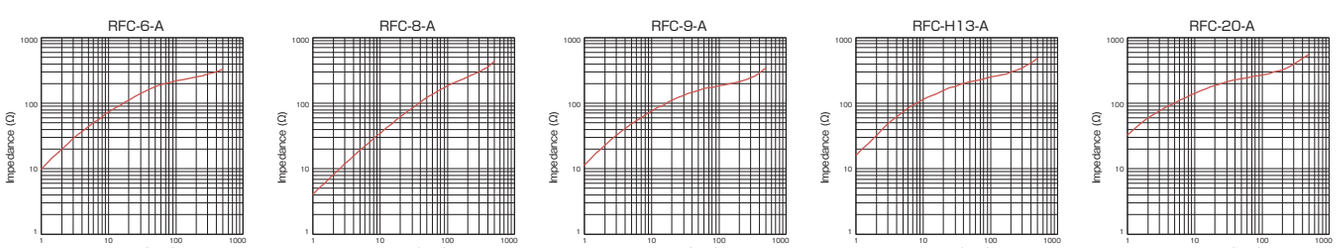

※The values are measured data for reference, not guaranteed.

SLEEVE FERRITE CLAMP／KCF

Split cores with plastic housing for easy installation on wired cables

Feature

- Split construction permits easy insertion on pre-installed cable and installed or cables with connectors.
- Kept in a plastic case, ferrite will not crack or chip. (UL 94 V-2)
- Cable is fixed firmly by plastic housing

Applications

- For noise problems arising from office automation equipment or other digital equipment.
- Internal and external power cable.
- Internal cables between PC boards and data connectors.
- White Plastic case available.

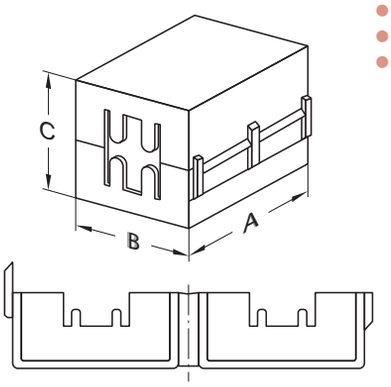

Unit: mm

Part No.	(A)	(B)	C	Max. cable diameter	Impedance* (Ω) 25MHz	Impedance* (Ω) 100MHz
KCF-50*	23.0	15.0	14.0	ø5.0	93	157
KCF-65*	32.6	17.8	19.2	ø6.5	176	267
KCF-100*	32.6	22.5	23.0	ø10.0	151	226
KCF-130*	32.7	29.2	30.2	ø13.0	152	228

*Contact us for the measurement conditions.

* White type is without ending / Black type has "BK" at the end of the part number

Impedance vs frequency properties*

KCF-50

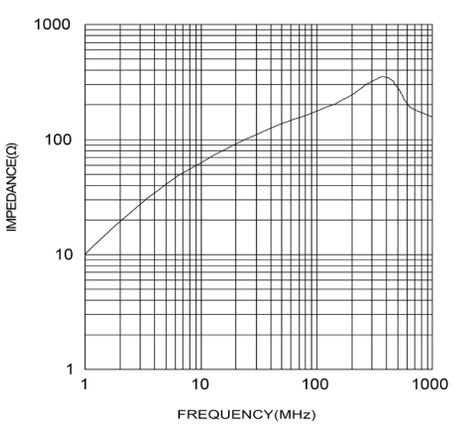

KCF-65

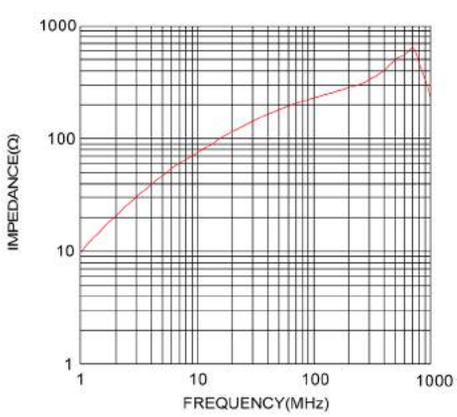

KCF-100

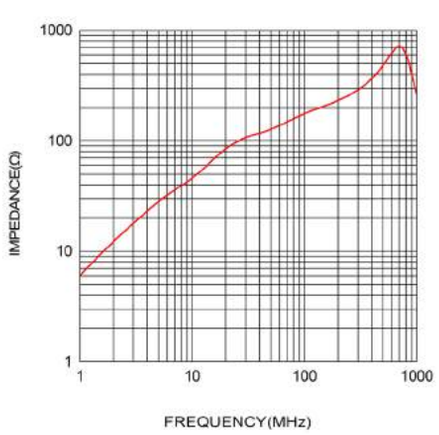

KCF-130

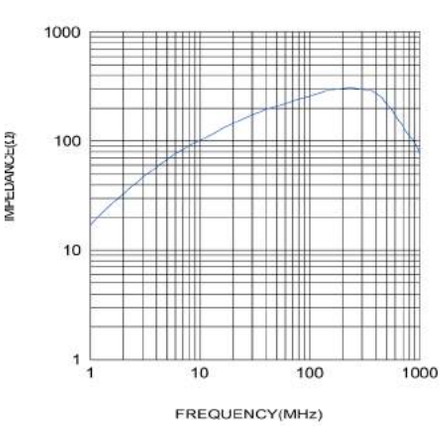

*The values are measured data for reference, not guaranteed.

Non-split sleeve cores

Material

● Soft ferrite

Unit：mm



Part No.	φ A	φ B	C	Impedance*Ω/100MHz（1turn）
GRI-3-4-1	3	1	4	≧ 25
GRI-3.5-3.5-1.2	3.5	1.2	3.5	≧ 25
GRI-3.5-7-1.2	3.5	1.2	7	≧ 40
GRI-4-5-1.5	4	1.5	5	≧ 30
GRI-11-18-5	11	5	18.5	≧ 85
GRI-11-20-5	11	5	20	≧ 90
GRI-11-25-5	11	5	25	≧105
GRI-12-16-8.5	12	8.5	16	≧ 35
GRI-12.3-20-7	12.3	7	20	≧ 70
GRI-14-28-6	14.3	6.3	28.6	≧130
GRI-16-20-7	16	7	20	≧ 95
GRI-16-28-7	16	7	28	≧130
GRI-16-28-8	16	8	28	≧115
GRI-16-28-9	16	9	28	≧ 95
GRI-17.5-28.5-10.7	17.5	10.7	28.5	≧ 85
GRI-18-28-10	18	10	28	≧100
GRI-26-28-13	26	13	28	≧120

Impedance vs frequency

GRI-3-4-1



GRI-3.5-3.5-1.2



GRI-3.5-7-1.2



GRI-4-5-1.5



GRI-11-18-5



GRI-11-20-5



GRI-11-25-5



GRI-12-16-8.5



GRI-12.3-20-7



GRI-14-28-6



GRI-16-20-7



GRI-16-28-7



GRI-16-28-8



GRI-16-28-9



GRI-17.5-28.5-10.7



GRI-18-28-10



GRI-26-28-13



*The values are measured data for reference, not guaranteed.

GRIP CORE／GRIP-3.5-1.8-2

Ferrite core applicable to discrete device without adhesive

Feature

- Because temporaly fasten is available, it is much easy installation of discrete device with the product onto PC board.
- Fastening with no adhesive can be reduced conventional adhesive dispensing process.
- Ringing suppression is available from FET or diode.



Material

- Soft ferrite
- Silicone rubber

Unit：mm

Part No.	Profile	Height	Clindrical Lead Outer Diameter	Rectangular Leadcross-sectional dimension
GRIP-3.5-1.8-2	ϕ4.4	2.8	ϕ0.6～1.6	0.8～1.5(Width)/0.3～0.7(Thickness)



Impedance vs frequency





■ Application



RIB CORE／GRIB

2 hole type small core

Material

- Soft ferrite

Impedance vs frequency

GRIB-3.5-7-7

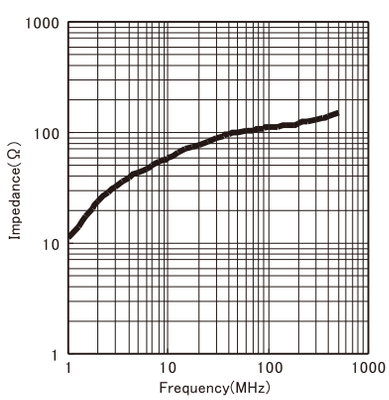

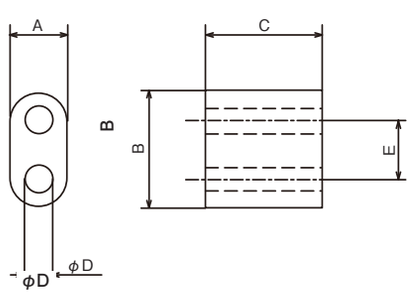

Unit：mm

Part No.	A	B	C	ϕD	E	Impedance* Ω/100MHz (1 turn)
GRIB-3.5-7-7	3.4	6.9	7.0	1.5	3.5	≧ 75

*The values are measured data for reference, not guaranteed.

Non-split toroidal cores

Material

- Soft ferrite



Unit：mm

Part No.	ϕA	ϕB	C	Impedance* Ω/100MHz (1 turn)
GTR-7-3-4	7	3.5	4	≧20
GTR-9-5-8	9	5	8	≧30
GTR-10-5-5	10	5	5	≧25
GTR-11-5-9	11	5	9	≧45
GTR-12.5-8-12	12.6	8.1	12	≧35
GTR-13-7-6	13	7	6	≧25
GTR-13-7-12.7	13	7.1	12.7	≧45
GTR-14.5-10-8	14.5	10.2	8	≧20
GTR-16-8-13	16.5	8.2	13	≧55
GTR-16-8-16	16.5	8.2	16	≧65
GTR-16-10-7	16	10	7	≧25
GTR-16-10-10	16	10	10	≧30
GTR-18-10-6	18	10	6	≧25
GTR-20-10-5	20.5	10.2	5	≧25
GTR-20-10-10	20.5	10.2	10	≧45
GTR-21-13-6	21.2	12.7	6	≧25
GTR-22-14-10	22	14	10	≧30
GTR-23-11-14	23.6	11.4	14	≧60
GTR-25-15-8	25	15	8	≧30
GTR-25-15-12	25	15	12	≧40
GTR-28-16-13	28	16	13	≧45
GTR-28-16-20	28	16	20	≧70
GTR-31-19-8	31	19	8	≧30
GTR-40-27-15	40.6	27.4	15	≧45

*Contact us for the measurement conditions.

TOROIDAL CORE／GTR

Impedance vs frequency

GTR-7-3-4



GTR-9-5-8



GTR-10-5-5



GTR-11-5-9



GTR-12.5-8-12



GTR-13-7-6



GTR-13-7-12.7



GTR-14.5-10-8



GTR-16-8-13



GTR-16-8-16



GTR-16-10-7



GTR-16-10-10



GTR-18-10-6



GTR-20-10-5



GTR-20-10-10



GTR-21-13-6



GTR-22-14-10



GTR-23-11-14



GTR-25-15-8



GTR-25-15-12



GTR-28-16-13



GTR-28-16-20



GTR-31-19-8



GTR-40-27-15



Oval style enables space-saving compared with toroidal type

Feature

- With cable either single or multiple turns, the over-all profile is lower than toroidal cores (refer to Fig. below).
- Oval shape allows assembly on connected cables with rectangular connectors, etc.

Material

- Soft ferrite

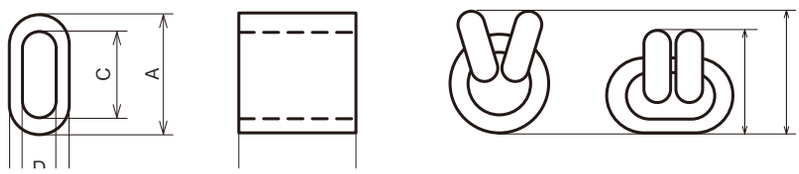

Unit：mm

Part No.	A	B	C	D	E	Impedance* Ω/100MHz (1 turn)
GTRE-14-12.5-8	14.0	8.0	10.0	4.0	12.5	≧ 30
GTRE-14-14-8					14.0	≧ 35

※Contact us for the measurement conditions.

Impedance vs frequency

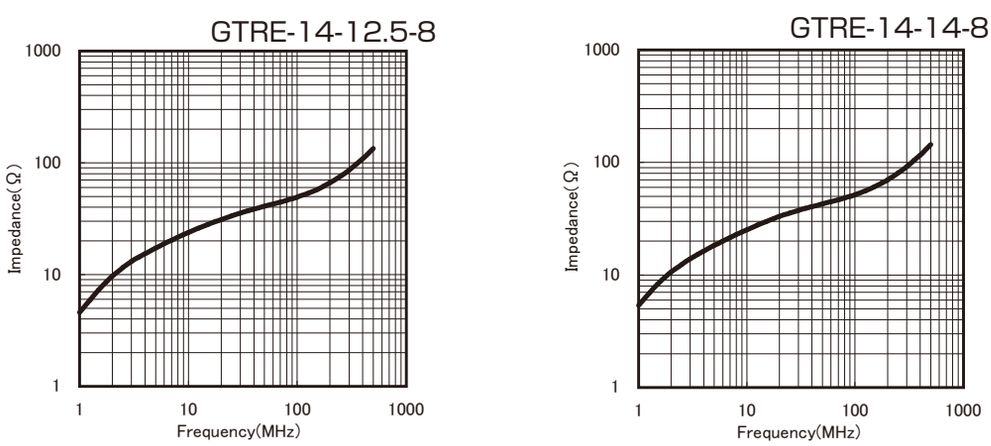

※The values are measured data for reference, not guaranteed.

TOROIDAL CORE／GTRCA

TOROIDAL CORE with housing which is suitable solution for suppressing noise in high-frequency range.

Feature

- With plastic housing preventing from cracking and chipping of the ferrite core.

Material

- Ferrite Core:Soft ferrite
- Housing: PA66 (Color: Light gray / Flammability:UL94V-0)



Unit：mm

GTRCA-20-10-10	22.6	8.2	13.3	≧ 45
GTRCA-25-15-12	27.3	12.8	15.2	≧ 40

Impedance vs frequency





※The values are measured data for reference, not guaranteed.

TOROIDAL CORE／TRCB



TOROIDAL CORE with housing which is suitable solution for suppressing noise in low-frequency range.

Feature

- With plastic housing preventing from cracking and chipping of the ferrite core.
- Effective noise filter for suppresing low-frequency noise in kHz to MHz range with the higher impedance characteristics.

Material

- Torodial Core: Mn-Zn Soft ferrite
- Housing:PA66(Color:Natural / Flammability:UL94V-0)
- PET with adhesive layer



Unit：mm

Part No.	A	B	C	Impedance* Ω/10MHz (1 turn)
TRCB-19-10-10	20.0	8.1	(11.7)	≧ 11
TRCB-25-15-12	26.7	13.3	(13.5)	≧ 8
TRCB-38-19-13	40.5	16.6	(15.1)	≧ 7

※Contact us for the measurement conditions.

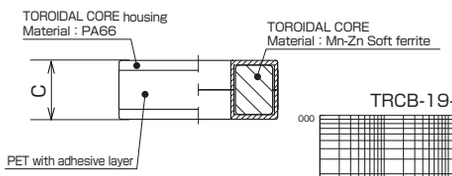







*The values are measured data for reference, not guaranteed.

Impedance vs frequency

LOW CUT CORE／TRM



"Mn" ferrite cores, suitable solutions for conductive and radiation noise in low frequency range

Feature

- High impedance noise filter in low frequency (kHz to MHz) range.
- Epoxy coated ferrite core has rounded corners to reduce load on cable.

Material

- Mn-Zn soft ferrite (epoxy coating)

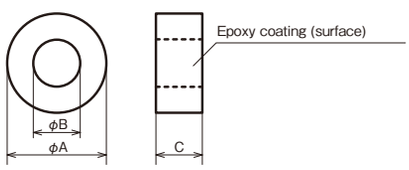

Unit：mm

Part No.	A	B	C	Impedance* Ω/10MHz (2turn)
TRM-16-8-16E-WE	17.0	7.1	16.9	≧ 70
TRM-20-10-10E-WE	21.0	9.1	10.9	≧ 35
TRM-25-15-12E-WE	26.0	14.1	12.9	≧ 35
TRM-31-20-15E-WE	32.1	19.0	15.9	≧ 30
TRM-38-19-13E-WE	39.2	17.9	14.0	≧ 35
TRM-47-27-15E-WE	48.5	25.7	16.3	≧ 25

Impedance vs frequency

1 Turn　2 Turn　3 Turn

TRM-16-8-16E-WE



TRM-20-10-10E-WE



TRM-25-15-12E-WE



TRM-31-20-15E-WE



TRM-38-19-13E-WE



TRM-47-27-15E-WE



※The values are measured data for reference, not guaranteed.

LOW CUT CORE (High μ type)／TRMH

Most suitable ferrite core for suppressing conductive noise at 1 MHz or less

Feature

- Due to the higher impedance in the frequency range of 1 MHz or less, the product is effective for suppressing conductive noise around 150kHz.
- As the number of turns increases, the impedance improves and a better effectiveness of noise suppression can be obtained.
- Resin coated core prevents from cables getting damaged by the edge of the core.
- The wide variation of size is available. (ϕ7.2~ϕ87.9)

Material

- Mn-Zn soft ferrite (epoxy coating)

Specification

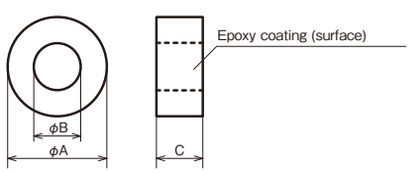

Unit：mm

Part No.	A	B	C	Impedance Ω/1MHz (1turn)
TRMH-16-8-16E	16.9	7.2	16.8	≧ 18
TRMH-20-10-10E	21.0	9.2	10.9	≧ 11
TRMH-25-15-12E	25.9	14.1	12.8	≧ 9
TRMH-31-20-15E	32.1	19.0	15.9	≧ 9
TRMH-38-19-13E	39.1	18.0	13.9	≧ 11
TRMH-47-27-15E	48.3	26.0	15.9	≧ 10
TRMH-65-38-30E	67.3	36.6	31.1	≧ 12
TRMH-74-46-20E	75.76	44.22	21.0	≧ 6
TRMH-103-66-25E	105.6	63.1	26.9	≧ 6
TRMH-160-90-26E	165.1	87.9	28.1	≧ 6

Impedance vs frequency

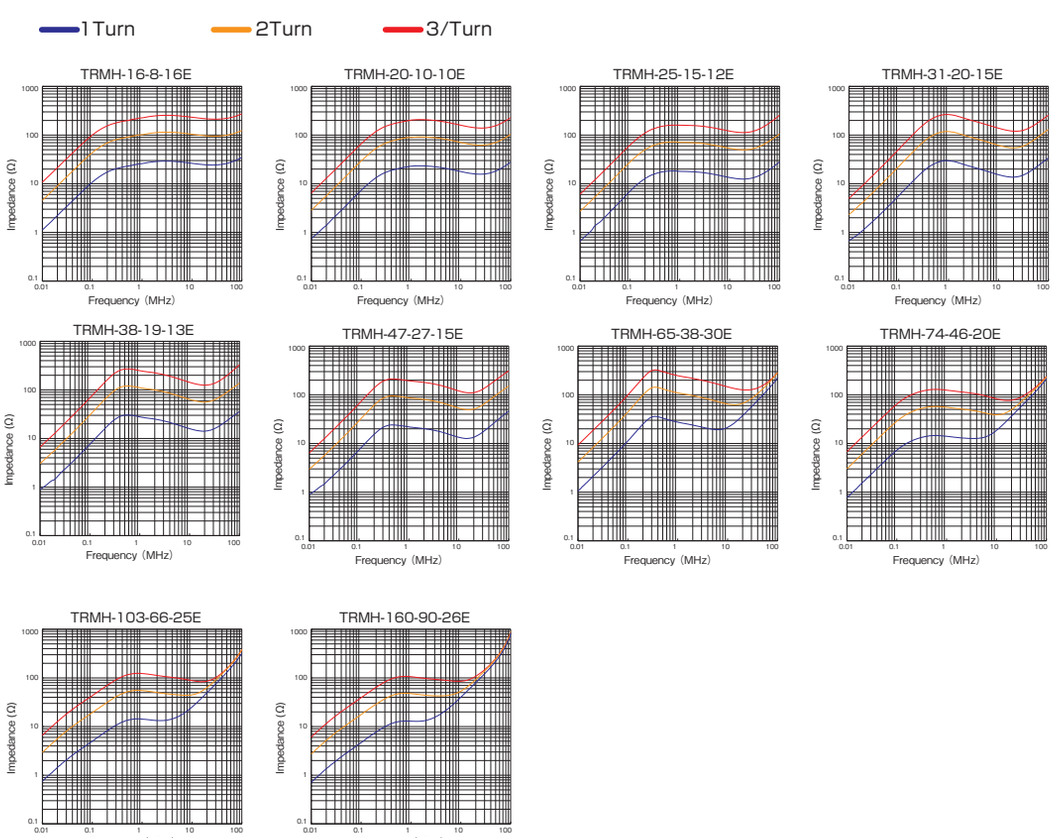

※The values are measured data for reference, not guaranteed.

LOW-CUT FERRITE CLAMP／RFCW

Noise filter, usable in engine rooms

Feature

- Conducted noise suppression filter for applications up to 125℃ and 10G vibration Applicable to vehicle vibrations requirements:
- ISO-16750-3-Ⅱ equivalent for passenger car transmission.
- High-frequency (RFCW-C10) and low-frequency (RFCW-13MA) noise versions FCW-C10 has a bracket for temporary fixation to corrugated tubes
- Tight fixing is available by its permanent lock structure.
- Its bracket fixture enables securing it with tape.
- Housing with anti-slip means for cable tie around its outer side.
- The material of the plastic housing is UL94V-2 certified.

Specification

Dimensions

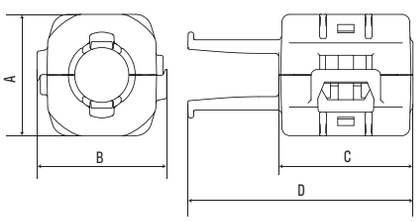

Unit:mm

Part No.	A	B	C	D	Applicable cable diameter
RFCW-C10-A-BK	34.6	36.8	35.0	58.7	Corrugated tube
RFCW-13MA-BK	31.4	33.6	34.8	58.3	φ13.5mm MAX

Properties

Impedance vs Frequency char

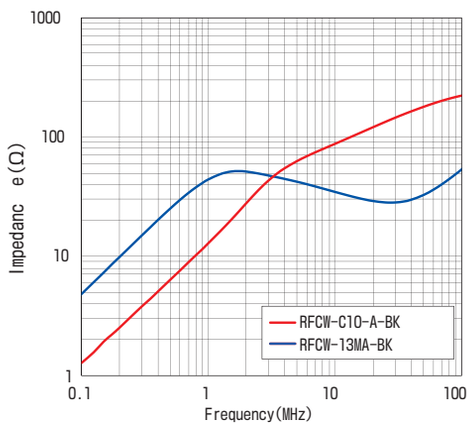

Fixing onto cable and chassis are available



Its bracket fixture enables securing it with tape.

Housing with anti-slip means.



※RFCW-C10-A-BK
The bracket fixture allows temporary fixation on tube corrugations.

Metal springs used

Heat-resistant and vibration-proof performance improves by embedded metal spring.

Removal with tool is available.

Removal with plug-in or flat-bladed screwdriver.

※ This product is in 1 set of configurations in two identical parts.

● All specifications and characteristics shown herein are typical values, but are not guaranteed.
All specifications and characteristics shown herein are subject to change without notice for improvements or changes in specification.
● It is prohibited reprint of the article in this brochure with out prior written consent by Ki

GFPC CORE／GFPC



Suitable solutions for FPC noise problems

Feature

- Provided with 3mm and 5mm and 2.3mm thickness types.
- Effective filtering performance for emission noise from FPC.

Material

- Soft ferrite

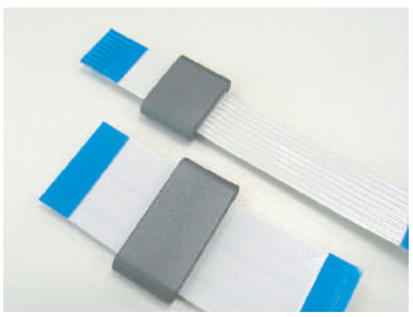

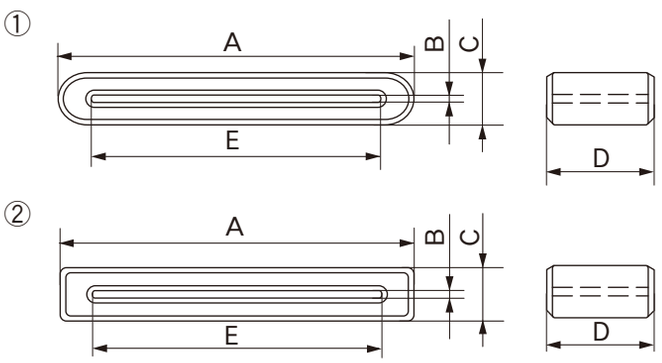

Unit：mm

Part No.	Profile	A	B	C	D	E	Impedance*Ω/100MHz（1turn）
GFPC-11-8-2	①	11.0	0.7	2.3	8.0	9.0	≧ 25
GFPC-16-8-2	①	15.5	0.7		8.0	12.0	≧ 25
GFPC-18-3-2	①	18.0	0.7		3.0	14.5	≧ 20
GFPC-18-8-2	①	18.0	0.7		8.0	14.5	≧ 25
GFPC-22-8-2	①	21.5	0.7		8.0	18.0	≧ 25
GFPC-16-5-3	①	16.0	0.5	3.0	5.0	11.5	≧ 20
GFPC-16-8-3	①	16.0	0.5		8.0	11.5	≧ 25
GFPC-24-12-3	②	23.3	0.9		12.0	20.0	≧ 30
GFPC-25-10-3	②	25.5	0.8		10.0	21.5	≧ 25
GFPC-25-15-3	②	25.5	0.8		15.0	21.5	≧ 35
GFPC-31-12-3	②	31.0	1.0		12.0	27.0	≧ 30
GFPC-16-12	①	16.0	0.5	5.0	12.0	11.5	≧ 45
GFPC-16-20	①	16.0	0.8		20.0	11.5	≧ 60
GFPC-25-12	①	24.5	0.5		12.0	20.0	≧ 35
GFPC-25-20	①	24.5	0.5		20.0	20.0	≧ 50
GFPC-31-12	①	31.0	0.5		12.0	27.0	≧ 40
GFPC-46-12	①	46.0	0.5		12.0	41.5	≧ 40
GFPC-56-12	①	56.2	0.5		12.0	52.4	≧ 35

*Contact us for the measurement conditions.

Impedance vs frequency

GFPC-11-8-2



GFPC-16-8-2



GFPC-18-3-2



GFPC-18-8-2



GFPC-22-8-2



GFPC-16-5-3



GFPC-16-8-3



GFPC-24-12-3



GFPC-25-10-3



GFPC-25-15-3



GFPC-31-12-3



GFPC-16-12



GFPC-16-20



GFPC-25-12



GFPC-25-20



GFPC-31-12



GFPC-46-12



GFPC-56-12



*The values are measured data for reference, not guaranteed.

FLAT CORE／GSSC

Noise suppression for ribbon cables

Feature

- GSSC suppresses emission noise for ribbon cables, FPC etc.

Material

- Soft ferrite

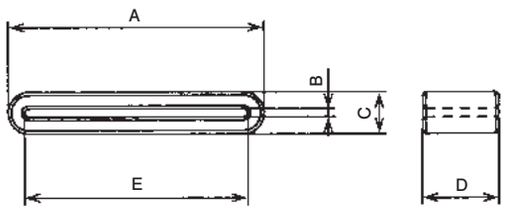

Unit：mm

Part No.	A	B	C	D	E	Impedance*Ω/100MHz（1turn）
GSSC-33.5-8	33.5	1.4	6.5	8.0	28.4	≧ 30
GSSC-33.5-10	33.5	1.4		10.0	28.4	≧ 30
GSSC-33.5-10-2	33.5	2.2	7.4	10.0	27.0	≧ 30
GSSC-33.5-12	33.5	1.4	6.5	12.0	28.4	≧ 35
GSSC-33.5-20	33.5	1.3		20.0	27.8	≧ 50
GSSC-40-12	40.0	1.3		12.0	35.0	≧ 35
GSSC-45-8	45.2	1.3		8.0	40.0	≧ 30
GSSC-45-12	45.2	1.3		12.0	40.0	≧ 35
GSSC-50-12	50.0	1.4		12.0	44.9	≧ 35
GSSC-58-12	57.6	1.3		12.0	52.0	≧ 35

※Contact us for the measurement conditions.

Impedance vs frequency











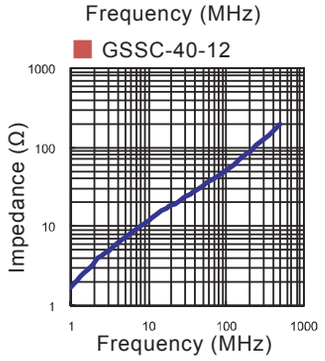









*The values are measured data for reference, not guaranteed.



Split core type for easy assembly on wired or connected cables

Feature

- For filtering noise emission from ribbon cables, FPC etc..

Material

- Soft ferrite

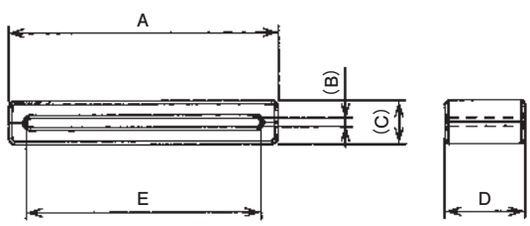

Unit：mm

Part No.	A	(B)	(C)	D	E	Impedance* Ω/100MHz (1 turn)
GSSH-33.5-12	33.5	1.2	6.6	12.0	27.0	≧ 35
GSSH-33.5-20	33.5			20.0	27.0	≧ 50
GSSH-40-12	40.0			12.0	34.8	≧ 35
GSSH-45-12	45.2			12.0	40.0	≧ 35

※Contact us for the measurement conditions.

Impedance vs frequency

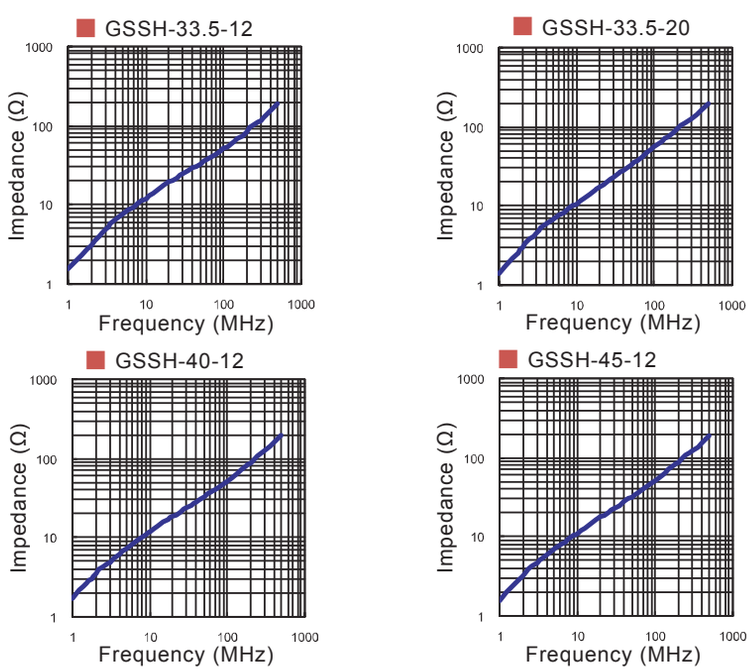

GFPH CORE／GFPH



Split core for convenient fitting on pre-wired cables

Feature

- GFPH ferrite core for effective filtering emission noise from FPC.

Material

- Soft ferrite

Impedance vs frequency

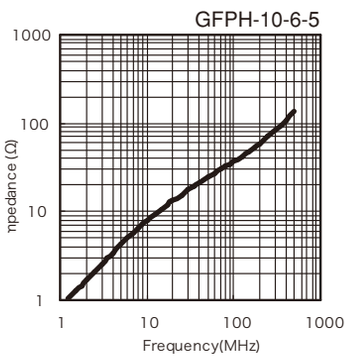

*The values are measured data for reference, not guaranteed.

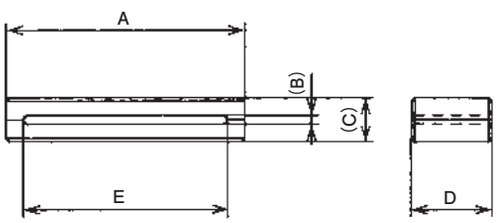

Unit：mm

Part No.	A	(B)	(C)	D	E	Impedance* Ω/100MHz (1 turn)
GFPH-10-6-5	10.0	1.8	5.0	6.0	6.8	25

※Contact us for the measurement conditions.

OPEN CIRCUIT CORE／GFPO



Open magnetic circuit structure provides high impedance with close contact on FPC

Feature

- Effective for noise attenuation over a broad frequency range, because the structure leads to a small impedance difference between individual cables of the FPC.

Material

- Soft ferrite

Impedance vs frequency

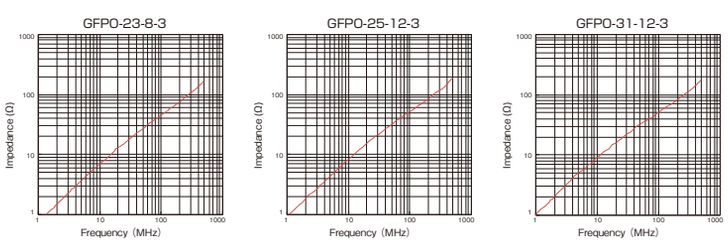

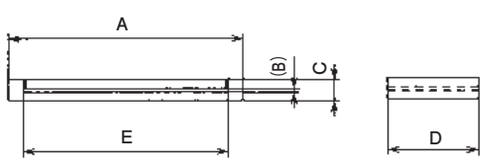

*The values are measured data for reference, not guaranteed.

Unit：mm

Part No.	A	B	C	D	E	Impedance＊Ω/100MHz(1turn)
GFPO-23-8-3	23.0	0.5	2.8	8.0	19.0	30
GFPO-25-12-3	25.0			12.0	21.0	35
GFPO-31-12-3	31.0			12.0	27.0	35

*Contact us for the measurement conditions.



Thin Ferrite Sheet provides optimal EMC solution for FPC and FFC.

Feature

- Product design enables the sandwiching of FPC or FFC from top and bottom to suppress EMC.
- Suitable for mobile devices with its thin and light properties.
- Its flexible property does not impair FPC's flexibility.
- Prevent cracking and scattering of ferrite with PET and adhesives.

Material

- PET with adhesive layer
- Ferrite sheet
- Double-sided adhesive tape





A,B：Soft ferrite
C,D：Profile(PET with adhesive layer)

①PET with an adhesive layer
②Ferrite sheet
③Double-sided adhesive tape

Dimensions

Unit：mm

Part No.	A	B	C	D	Applicable cable width
FFPC-0.3-10-5	10	5	32.5	6.5	10
FFPC-0.3-10-10		10	30	11	
FFPC-0.3-12-8	12	8	38.5	9.5	12
FFPC-0.3-14-14	14	14	38	15	14

Part No.	A	B	C	D	Applicable cable width
FFPC-0.3-22-8	22	8	60.5	9.5	22
FFPC-0.3-22-14		14	54	15	
FFPC-0.3-27-14	27		70.5	15.5	27
FFPC-0.3-44-14	44		98	15	44

※Custom profiles design is also available. Please contact our sales representative for further information.

Properties

Higher insertion loss and excellent EMC suppression in low frequency range (30MHz~300MHz) compared to metal filler electromagnetic noise suppression sheet.

Radiated emission level from differential signal cable with component.



Metal filler EMC noise suppression sheet



SMARTPLY



Emission level

Mounting FFPC onto flexible cable

1.Gently bend the liner while take the ferrite sheet off.



2.Attach SMARTPLY to the cable on part (A).



3.Attach on part (B) and wrap with SMARTPLY around the cable.

4.Fold part so as to attach part (C) on the back side of part (A). It's ready by simple procedure.



※ It is not advisable to reuse the product once it is removed.

Permeability

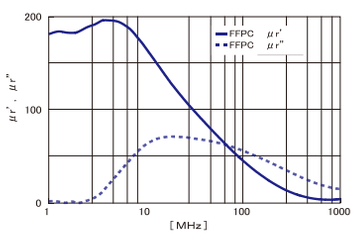

Impedance vs frequency

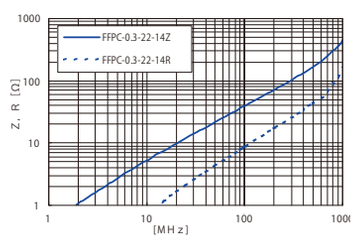

※The values are measured data for reference, not guaranteed.

SMARTPLY ENGINEERING SAMPLE KIT／ESF-18

Various Smartplys in one booklet

BLOCK CORE／BCN

Labor-saving assembly and fixing by combination with plastic clamp

Feature

- Split core type, easy assembly on wired or connected ribbon cables.
- Plastic clamp integrated type allows easy assembly.

Material

- Core / Soft ferrite
- Clamp / Nylon 66 (Light gray / UL94V-0)

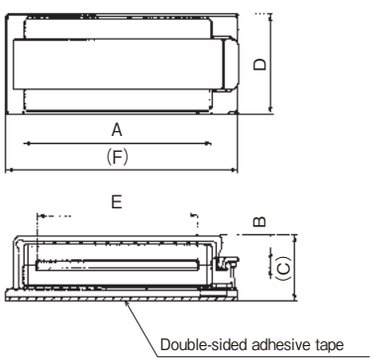

Unit：mm

Part No.	A	B	(C)	D	E	(F)	Impedance* Ω/100MHz (1 turn)
BCN-26-R	45.0	2.0	19.6	30.0	34.0	59.5	≧125
BCN-40-R	63.0		19.5		52.0	76.5	≧137
BCN-50-R	76.5				64.5	90.7	≧142

※Contact us for the measurement conditions.

Impedance vs frequency

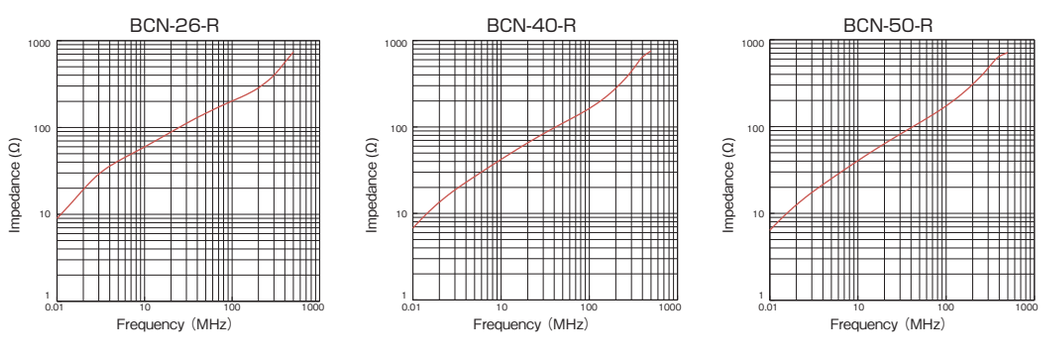



Split core with metal clip (FP16.5-2-10.25 excluded)

Feature

- Kitagawa offers a line of bisected flat cable suppression cores to attenuate radiated EMI emissions from ribbon cables.
- Ferrite assembly press-fitted into a pair of metal clips.
- Metal clips included, except FP 16.5-2-10.25

Material

- Soft ferrite

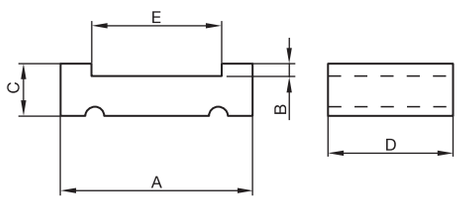

Part No.		Unit: mm					Impedance (Ω)	
		A	B	C	D	E	25 MHz	100 MHz
FP 16.5-2-10.25		16.5±0.25	0.6±0.2	2.0±0.2	10.25±0.2	12.5±0.3	29	72
FP 38-6.35-10	*	38.0±1.0	0.8±0.2	6.35±0.25	10.0±0.4	26.6±0.7	45	107
FP 38-6.35-25.4	*	38.0±1.0	0.8±0.2	6.35±0.25	25.4±0.7	26.6±0.7	103	173
FP 45-6.35-10	*	45.0±0.75	0.8±0.2	6.35±0.25	10.0±0.4	34.4±0.7	41	98
FP 45-6.35-28.5	**	45.0±0.75	0.8±0.2	6.35±0.25	28.5±0.7	34.4±0.7	84	166
FP 55.1-6.35-28.5	**	55.1±1.2	0.8±0.2	6.35±0.25	28.5±0.7	43.7±1.0	78	179
FP 63.5-6.35-13	*	63.5±1.3	0.8±0.2	6.35±0.25	13.0±0.4	52.0±1.1	45	114
FP 63.5-6.35-15	*	63.5±1.3	0.8±0.2	6.35±0.25	15.0±0.4	52.0±1.1	50	124
FP 63.5-6.35-28.5	**	63.5±1.3	0.8±0.2	6.35±0.25	28.5±0.7	52.0±1.1	74	155

The values are measured data for reference, not guaranteed.

*Metal clips (KE-MC-10 or KE MC-13) are included
**Metal clips (KE-MC-13) are included

Shape of FP 16.5-2-10.25 is slightly different.

*Contact us for the measurement conditions.

TOROIDAL CORE／KTR

Non-split toroidal core for intermediate frequency range from 3 to 50MHz.

Feature

- Effective for suppression both of conducted noise upto 30MHz and radiated noise over 30MHz.
- With regard to variation of size, please contact our sales department.

Material

- Soft ferrite (Epoxy coating)



KTR-35-21-18E	35.6	20.0	18.8	≧80
KTR-40-27-15E	41.4	26.7	15.7	≧50

Impedance vs frequency

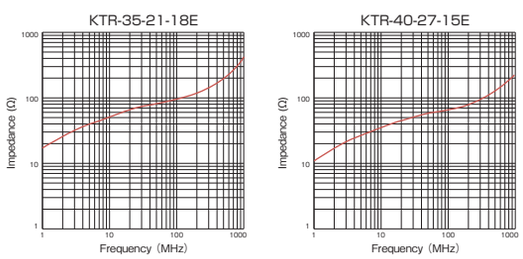

Normal-mode noise suppressing core with excellent DC superposition property

Feature

- Impedance is not lowered by current superposition (Current at 20A or less) because of higher saturation magnetic flux density compare to ferrite. Possible to suppress normal-mode noise.
- High Curie temperature. Stable temperature property under condition of -40 °C to +140 °C, which does not allow impedance to be lowered.
- Resin-coated surface of the core, preventing its edge from damaging cables.



Dimensions

Unit：mm

Part No.	Outer Diameter max.	Internal Diameter min.	Length max.	Impedance* Ω/1MHz (5turn)
MPTR-20-13-10E	21.2	11.8	10.9	≧ 7
MPTR-27-15-11E	27.8	13.8	12.1	≧ 12
MPTR-40-24-15E	40.9	23.1	15.48	≧ 12

Impedance vs frequency

MPTR-20-13-10E



MPTR-27-15-11E



MPTR-40-24-15E



● Impedance with DC superposition (20A)

MPTR-40-24-15E

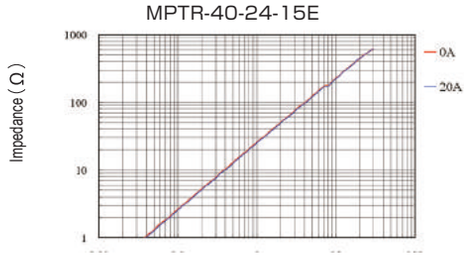

※Measurement conditions: Impedance measurement: 5 turns / DC superposition: 1 turn

※The values are measured data for reference, not guaranteed.

RADIATION NOISE FILTER／RN80UD



Effective noise suppression at radio frequency range

Feature

- Large core suits application to power supply lines for large current capacity.

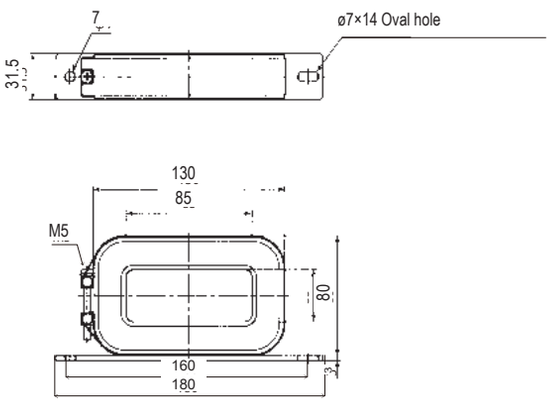

Insertion loss frequency properties*

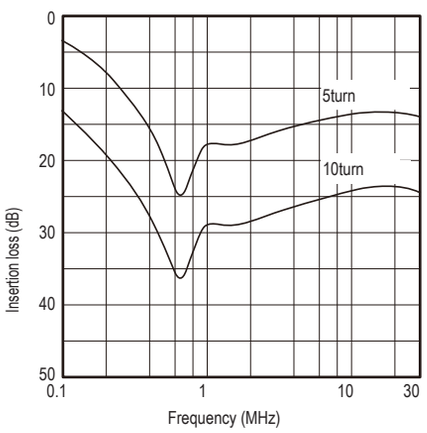

*The values are measured data for reference, not guaranteed.

FERRITE DESIGN KIT ESF-11G

LOW CUT KIT ESF-13

FERRITE CORE ENGINEERING KIT G-TOWER

Over 80 kinds of new product line up of KGS Ferrite "G-Core" in a compact tower. Cores are placed in 48 drawers which enables easy pick up. Ideal to support EMC engineering or as sample stock holder



Wire-wound Common Mode Filter applicable to automated mounting on PC board.

■ Outside dimensions



■ Equivalent circuit



■ Recommended pad dimensions



KWCM Series

- Wire-wound Common Mode Filter optimal for the High-speed differential signal(Applicable reflow soldering.)
- 2012 (2.0×1.2mm),3216 (3.2×1.6mm):2 size variation.

Part Number Guide

KWCM - 2012 - 900 T
(1) (2) (3) (4)

(1) Product classification
(2) Size
(3) Impedance
(4) Packing specification

Unit:mm

Part Number / Size	A	B	C	D1 TYP	D2 TYP	F TYP	G TYP	H TYP	I TYP
KWCM-2012	2.0±0.2	1.2±0.2	1.2±0.2	0.45	0.4	0.4	0.4	0.8	0.9
KWCM-3216	3.2±0.2	1.6±0.2	2.0±0.2	0.6	0.6	0.4	0.6	1.6	1.05

Electrical characteristics

Part No.	Common Mode Impedance (Ω) at 100MHz	DC Resistance (Ω) max.	Rated Current (mA.) max.	Rated Voltage (V) max.
KWCM-2012-120T	≧ 12±25%	0.20	450	50 (DC)
KWCM-2012-240T	≧ 24±25%	0.25	420	50 (DC)
KWCM-2012-320T	≧ 32±25%	0.25	400	50 (DC)
KWCM-2012-500T	≧ 50±25%	0.25	400	50 (DC)
KWCM-2012-670T	≧ 67±25%	0.25	400	50 (DC)
KWCM-2012-900T	≧ 90±25%	0.30	400	50 (DC)
KWCM-2012-121T	≧ 120±25%	0.30	370	50 (DC)

Part No.	Common Mode Impedance (Ω) at 100MHz	DC Resistance (Ω) max.	Rated Current (mA.) max.	Rated Voltage (V) max.
KWCM-2012-141T	≧ 140±25%	0.32	360	50 (DC)
KWCM-2012-161T	≧ 160±25%	0.35	350	50 (DC)
KWCM-2012-181T	≧ 180±25%	0.35	330	50 (DC)
KWCM-2012-201T	≧ 200±25%	0.40	300	50 (DC)
KWCM-2012-221T	≧ 220±25%	0.40	300	50 (DC)
KWCM-2012-261T	≧ 260±25%	0.40	300	50 (DC)
KWCM-2012-371T	≧ 370±25%	0.45	280	50 (DC)

Part No.	Common Mode Impedance (Ω) at 100MHz	DC Resistance (Ω) max.	Rated Current (mA.) max.	Rated Voltage (V) max.
KWCM-3216-330T	≧ 33±25%	0.20	400	50 (DC)
KWCM-3216-500T	≧ 50±25%	0.25	400	50 (DC)
KWCM-3216-900T	≧ 90±25%	0.35	400	50 (DC)
KWCM-3216-121T	≧ 120±25%	0.30	400	50 (DC)
KWCM-3216-161T	≧ 160±25%	0.40	350	50 (DC)
KWCM-3216-221T	≧ 220±25%	0.45	300	50 (DC)
KWCM-3216-261T	≧ 260±25%	0.50	310	50 (DC)

Part No.	Common Mode Impedance (Ω) at 100MHz	DC Resistance (Ω) max.	Rated Current (mA.) max.	Rated Voltage (V) max.
KWCM-3216-501T	≧ 500±25%	0.80	260	50 (DC)
KWCM-3216-601T	≧ 600±25%	0.80	260	50 (DC)
KWCM-3216-102T	≧ 1000±25%	1.20	250	50 (DC)
KWCM-3216-222T	≧ 2200±25%	1.20	200	50 (DC)

SMD COMMON MODE FILTER／KWCM

Impedance vs Frequency characteristics



















































※The values are measured data for reference, not guaranteed.

SMD COMMON MODE FILTER／KWCM-HS



Wire-wound Common Mode Filter applicable to automated mounting on PC board.

■ Outside dimensions



■ Equivalent circuit



■ Recommended pad dimensions



KWCM-HS Series

- Wire-wound Common Mode Filter optimal for the ultra-high-speed differential signal. (reflow applicable)
- 1210 (1.2×1.0mm) , 2012 (2.0×1.2mm): 2 size variation.
- Smaller negative effect to high speed differential signal due to the lower insertion-loss.

Part Number Guide

KWCM - 2012 - HS - 900 T
(1) (2) (3) (4) (5)

(1) Product classification
(2)Size
(3) Type
(4) Impedance
(5) Packing specification

Unit：mm

Part Number / Size	A	B	C	D1 TYP	D2 TYP	F TYP	G TYP	H TYP	I TYP
KWCM-1210HS	1.2±0.2	1.0±0.2	0.9±0.2	0.36	0.38	0.3	0.45	0.6	0.45
KWCM-2012HS	2.0±0.2	1.2±0.2	1.2±0.2	0.45	0.4	0.4	0.4	0.8	0.9

Electrical characteristics

Part No.	Common Mode Impedance (Ω) at 100MHz	DC Resistance (Ω) max.	Rated Current (mA.) max.	Rated Voltage (V) max.
KWCM-1210HS-250T	≧ 25±25%	0.25	420	50 (DC)
KWCM-1210HS-600T	≧ 60±25%	0.25	400	50 (DC)
KWCM-1210HS-900T	≧ 90±25%	0.30	400	50 (DC)
KWCM-2012HS-120T	≧ 12±25%	0.20	450	50 (DC)

Part No.	Common Mode Impedance (Ω) at 100MHz	DC Resistance (Ω) max.	Rated Current (mA.) max.	Rated Voltage (V) max.
KWCM-2012HS-240T	≧ 24±25%	0.25	420	50 (DC)
KWCM-2012HS-320T	≧ 32±25%	0.25	400	50 (DC)
KWCM-2012HS-670T	≧ 67±25%	0.25	400	50 (DC)
KWCM-2012HS-900T	≧ 90±25%	0.30	400	50 (DC)

Impedance vs Frequency characteristics

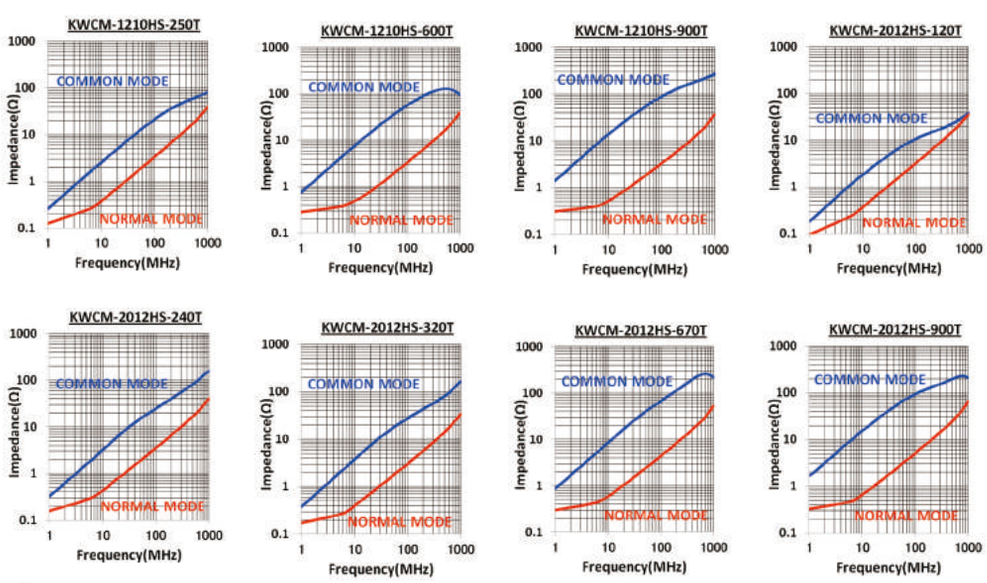

※The values are measured data for reference, not guaranteed.

SMD COMMON MODE FILTER／KWCM-HDMI



Wire-wound Common Mode Filter applicable to automated mounting on PC board.

■ Outside dimensions



■ Equivalent circuit



■ Recommended pad dimensions



KWCM-HDMI Series

- Wire-wound Common Mode Filter optimal for the signal HDMI. (reflow applicable)
- Matching the characteristic impedance of 100Ω.
- Smaller negative effect to high speed differential signal due to the lower insertion-loss.

Part Number Guide

KWCM - 2012 - HDMI - 900 T
(1) (2) (3) (4) (5)

(1) Product classification
(2) Size
(3) Type
(4) Impedance
(5) Packing specification

Unit:mm

Part Number / Size	A	B	C	D1 TYP	D2 TYP	F TYP	G TYP	H TYP	I TYP
KWCM-2012HDMI	2.0±0.2	1.2±0.2	1.2±0.2	0.45	0.4	0.4	0.4	0.8	0.9

Electrical characteristics

Part No.	Common Mode Impedance (Ω) at 100MHz	DC Resistance (Ω) max.	Rated Current (mA.) max.	Rated Voltage (V) max.
KWCM-2012HDMI-400T	≧ 40±25%	0.25	400	50 (DC)
KWCM-2012HDMI-670T	≧ 67±25%	0.25	400	50 (DC)
KWCM-2012HDMI-900T	≧ 90±25%	0.30	400	50 (DC)

Impedance vs Frequency characteristics







※The values are measured data for reference, not guaranteed.



Ferrite Chip Bead, normal type

Feature

- MLB (Normal type) generates an impedance from the relatively lower to high frequency.
- Effective in noise suppression in the wide frequency range
- Impedance Range : 28 to 2000 ohm
- Rated Current Range : 100 mA to 500 mA
- Operating temperature Range : -40°C to +125°C
- Soldering Method : Reflow of Wave soldering, suitable for lead free soldering
- Packaging Method : Tape & Reel (per EIA Specifications)
- Storage Temperature : max.40°C, RH 70%

Application

- General I/O wide band EMI suppression
- It is particular effective with unstable grounding.
- High frequency EMI preventation of computers, printers, VCRs,TVs, and portable telephone.

Part Number Code

MLB	-	160808	-	0010	N	01
Series Name		Size Code		Impedance (ex.0010=10 Ω ± 25%)	Classification	Rated Current
					N=Normal	01=100 mA

Notes for MLB Series
Please contact our sales department for the application other than above mentioned indication.
Please ask individual data sheet to verify detailed specification and performance.

Shape and Dimensions

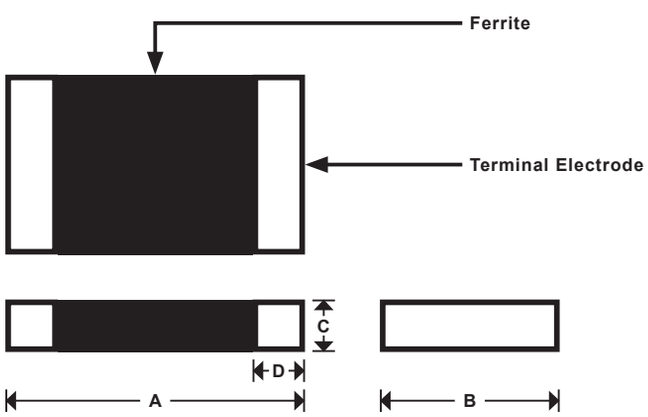

Unit: mm

SIZE CODE	A	B	C	D	Chips/reel
100505(0402)	1.00+/-0.1	0.50+/-0.1	0.50+/-0.1	0.25+/-0.1	10000
160808(0603)	1.60+/-0.2	0.80+/-0.2	0.80+/-0.2	0.3+/-0.2	4000
201209(0805)	2.00+/-0.2	1.20+/-0.2	0.90+/-0.2	0.5+/-0.3	4000
321611(1206)	3.20+/-0.2	1.60+/-0.2	1.10+/-0.2	0.5+/-0.3	3000

FERRITE CHIP BEAD／MLB

Part No.	Impedance (Ω)@100MHz±25%	DCR (Ω)max	Rated Current (mA) max
MLB-100505-0120N015	120	0,500	150
MLB-100505-0300N01	300	0,800	100
MLB-100505-0600N01	600	1,000	100
MLB-160808-0028N03	28	0,300	300
MLB-160808-0060N03	60	0,200	300
MLB-160808-0080N03	80	0,300	300
MLB-160808-0090N03	90	0,300	300
MLB-160808-0120N02	120	0,300	200
MLB-160808-0150N02	150	0,400	200
MLB-160808-0220N02	220	0,400	200
MLB-160808-0300N02	300	0,500	200
MLB-160808-0600N02	600	0,600	200
MLB-160808-1000N01	1000	1,000	100
MLB-201209-0030N05	30	0,150	500
MLB-201209-0060N04	60	0,300	400
MLB-201209-0080N04	80	0,300	400
MLB-201209-0090N03	90	0,300	300
MLB-201209-0120N03	120	0,300	300
MLB-201209-0300N02	300	0,400	200
MLB-201209-0600N02	600	0,600	200
MLB-201209-1000N02	1000	0,800	200
MLB-321611-0032N05	32	0,150	500
MLB-321611-0090N04	90	0,300	400
MLB-321611-0120N04	120	0,300	400
MLB-321611-0300N03	300	0,500	300
MLB-321611-0600N02	600	0,600	200
MLB-321611-1000N02	1000	0,800	200
MLB-321611-1500N01	1500 (50MHz)	0,900	100
MLB-321611-2000N01	2000 (50MHz)	1,200	100

Please contact us if other specification
(Size,Impedance, Rated Current etc.) is needed.

■ MLB-100505-0120N015

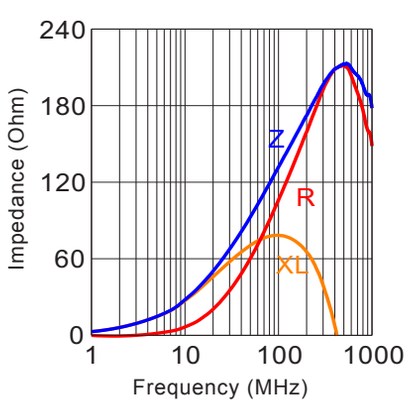

■ MLB-100505-0300N01

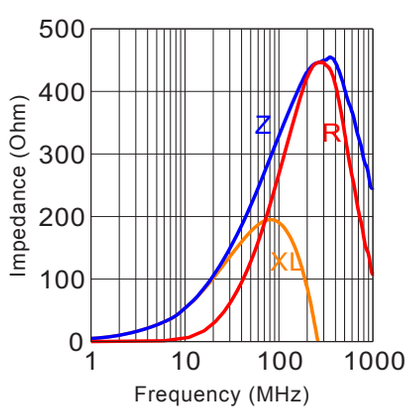

■ MLB-100505-0600N01

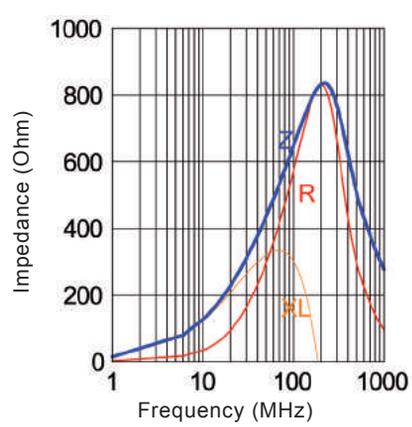

■ MLB-160808-0028N03

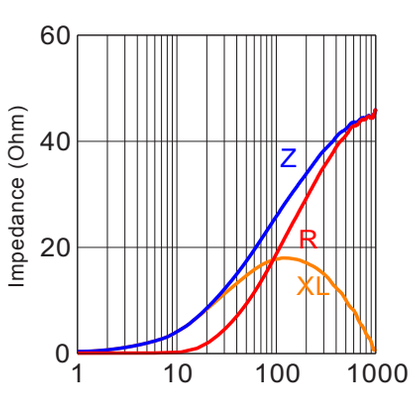

■ MLB-160808-0060N03

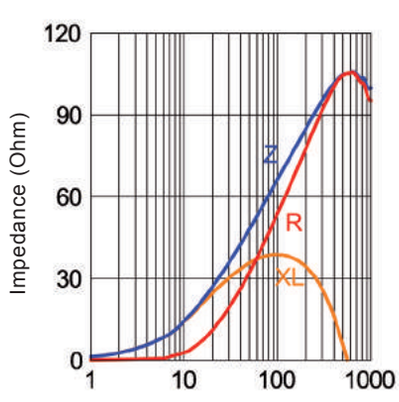

■ MLB-160808-0080N03

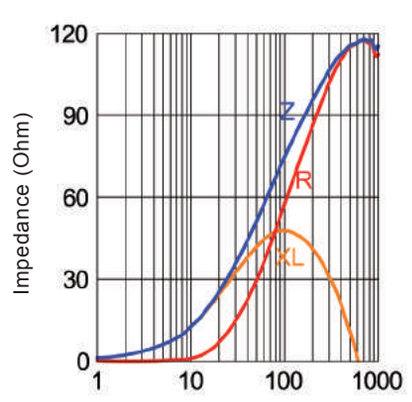

MLB-160808-0090N03

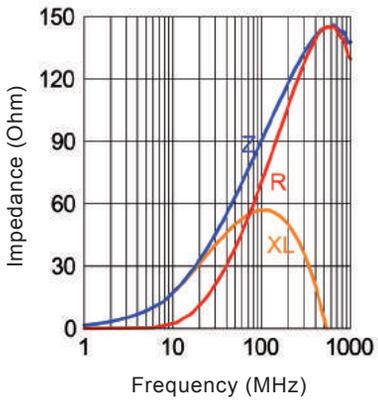

MLB-160808-0120N02

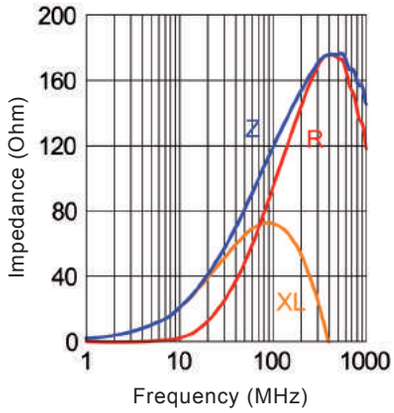

MLB-160808-0150N02

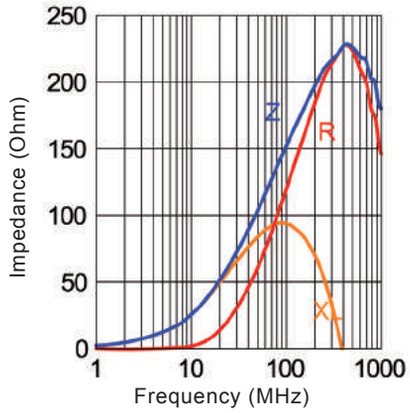

MLB-160808-0220N02

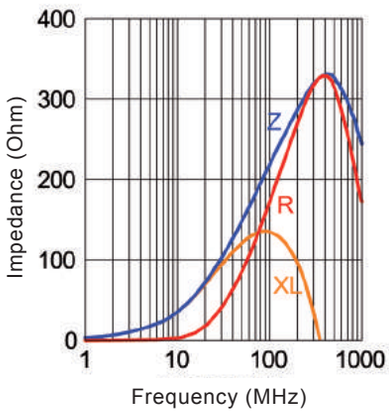

MLB-160808-0300N02

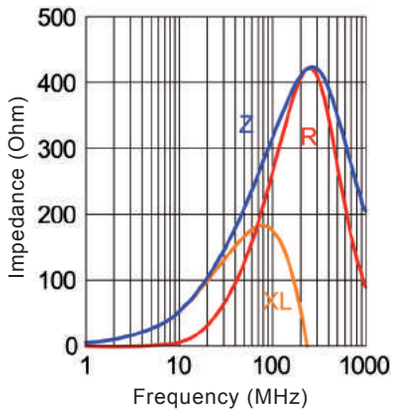

MLB-160808-0600N02

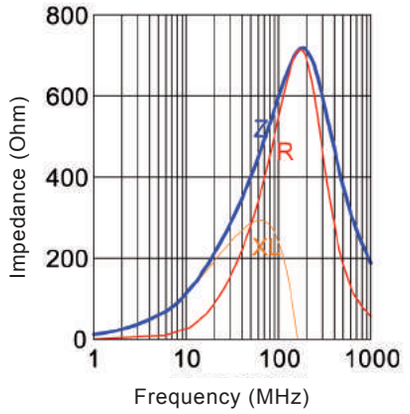

MLB-160808-1000N01

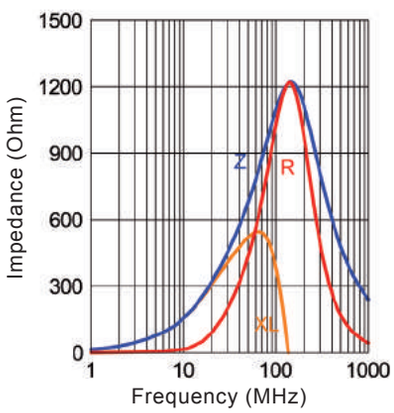

MLB-201209-0030N05

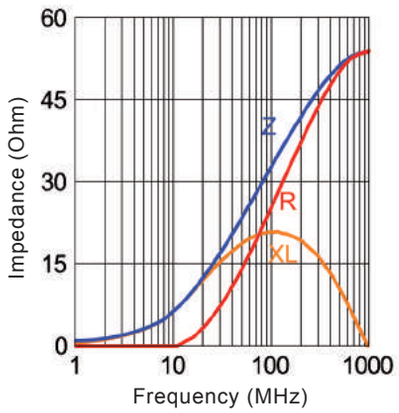

MLB-201209-0060N04

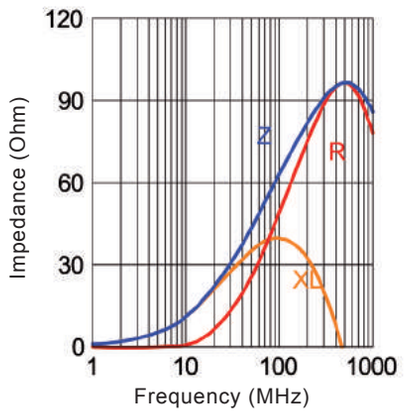

MLB-201209-0080N04

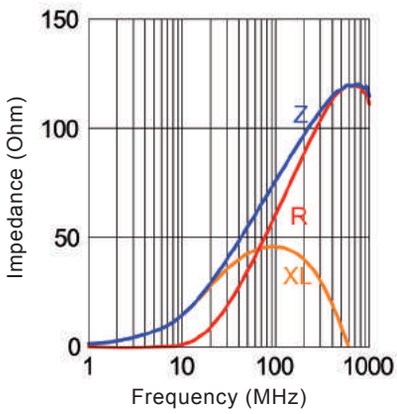

MLB-201209-0090N03

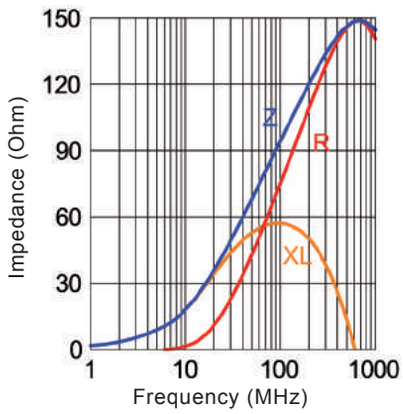

MLB-201209-0120N03

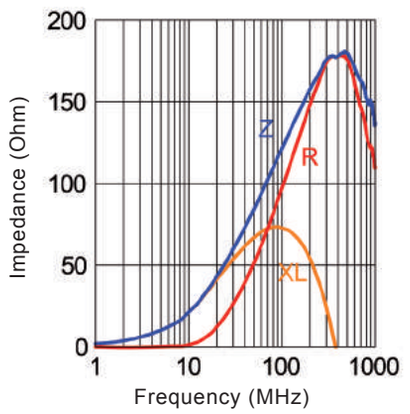

MLB-201209-0300N02

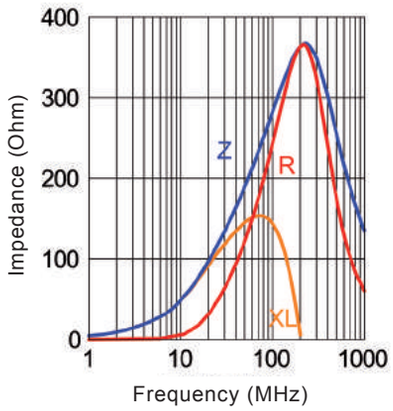

MLB-201209-0600N02

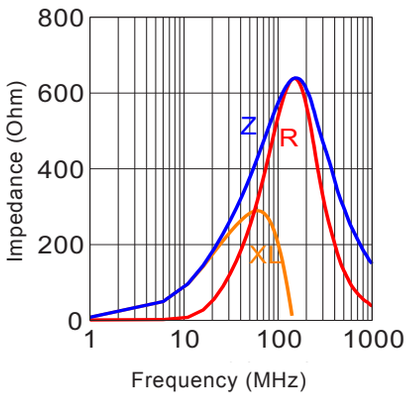

MLB-201209-1000N02

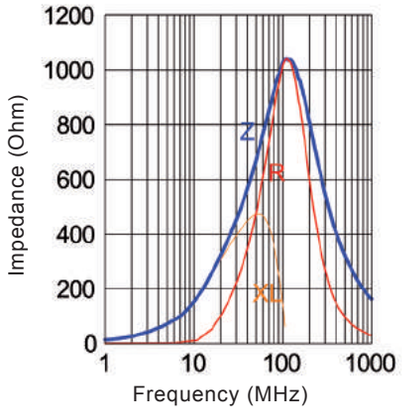

MLB-321611-0032N05

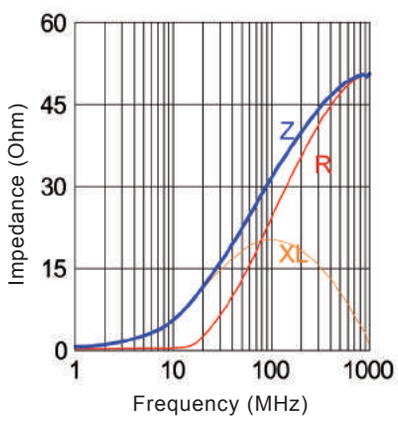

MLB-321611-0090N04

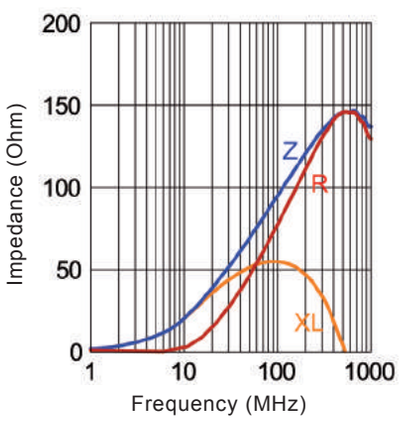

MLB-321611-0120N04

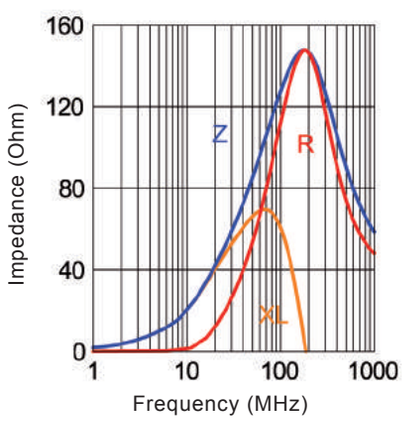

MLB-321611-0300N03

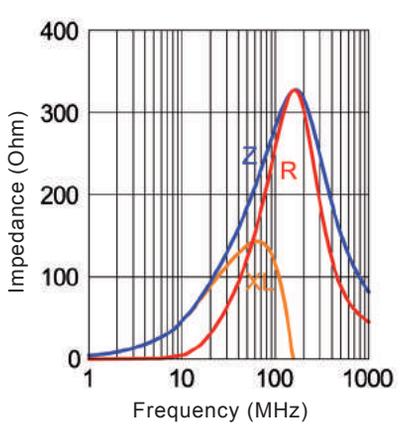

MLB-321611-0600N02

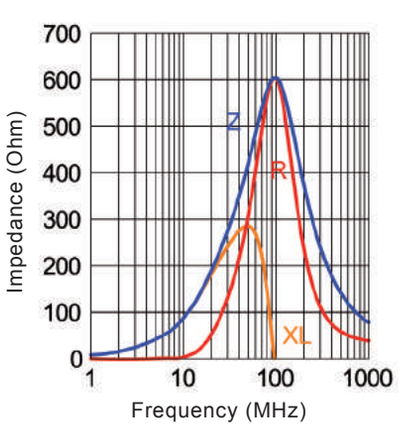

MLB-321611-1000N02

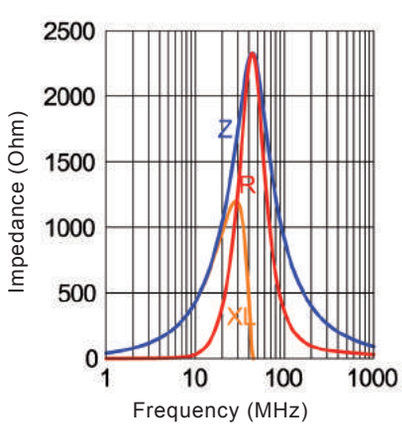

MLB-321611-1500N01

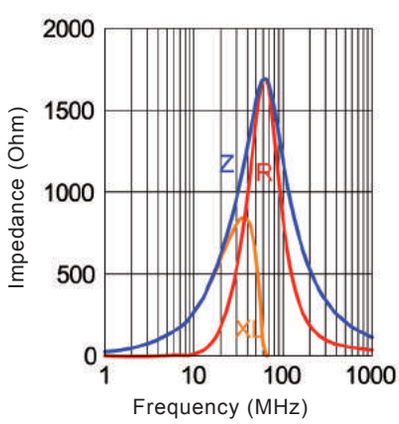

MLB-321611-2000N01

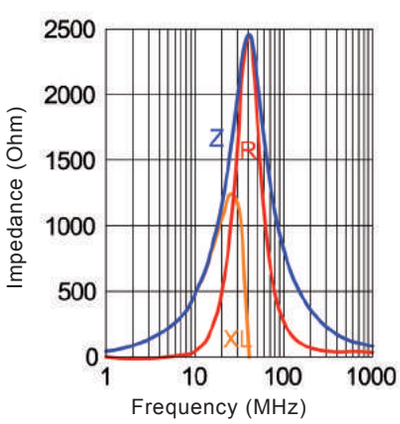



Ferrite Chip Bead, high current type

Feature

- MLB (high current type) can be used in high current circuit due to ist low DC resistance.
- It can match power line to a maximum of 6A DC.
- Impedance Range : 30 to 1000 ohm
- Rated Current Range : 1000 mA to 6000 mA
- Operating temperature Range : -40°C to +125°C
- Soldering Method : Reflow of Wave soldering, suitable for lead free soldering
- Packaging Method : Tape & Reel (per EIA Specifications)
- Storage Temperature : max.40°C, RH 70%

Application

- EMI preventation for power line to a maximum of 6A DC.
- It is particular effective with unstable grounding.
- High frequency EMI preventation of computers, printers, VCRs,TVs, and portable telephone.

Part Number Code

MLB	-	160808	-	0010	C	25
Series Name		Size Code		Impedance (ex.0030=30 Ω ± 25%)	Classification	Rated Current
					C=High Current application	25=2500 mA

Notes for MLB Series
Please contact our sales department for the application other than above mentioned indication.
Please ask individual data sheet to verify detailed specification and performance.

Shape and Dimensions

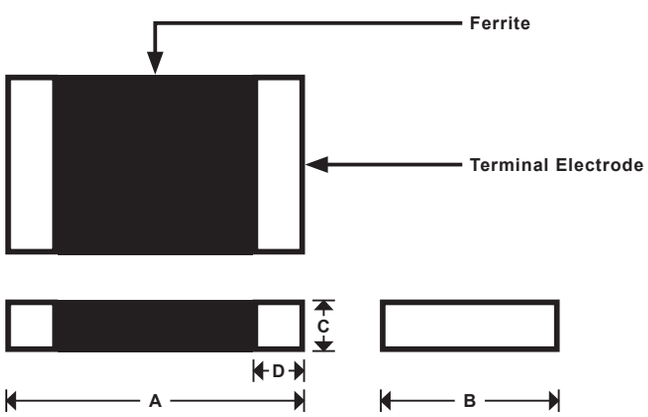

Unit: mm

SIZE CODE	A	B	C	D	Chips/reel
160808(0603)	1.60+/-0.2	0.80+/-0.2	0.80+/-0.2	0.3+/-0.2	4000
201209(0805)	2.00+/-0.2	1.20+/-0.2	0.90+/-0.2	0.5+/-0.3	4000
321611(1206)	3.20+/-0.2	1.60+/-0.2	1.10+/-0.2	0.5+/-0.3	3000

HIGH CURRENT FERRITE CHIP BEAD／MLB

Part Co.	Impedance (Ω)@100MHz±25%	DCR (Ω)max	Rated Current (mA) max
MLB-160808-0030C25	30	0,050	2500
MLB-160808-0060C30	60	0,040	3000
MLB-160808-0080C30	80	0,040	3000
MLB-160808-0120C30	120	0,040	3000
MLB-160808-0220C15	220	0,150	1500
MLB-160808-0300C20	300	0,100	2000
MLB-160808-0600C10	600	0,200	1000
MLB-201209-0033C40	33	0,035	4000
MLB-201209-0060C40	60	0,035	4000
MLB-201209-0080C50	80	0,020	5000
MLB-201209-0120C50	120	0,020	5000
MLB-201209-0250C30	250	0,040	3000
MLB-201209-0300C30	300	0,040	3000
MLB-201209-0600C20	600	0,100	2000
MLB-201209-1000C10	1000	0,200	1000
MLB-321611-0080C40	80	0,035	4000
MLB-321611-0120C60	120	0,010	6000
MLB-321611-0300C10	300	0,200	1000
MLB-321611-0600C30	600	0,040	3000
MLB-321611-1000C10	1000	0,200	1000

Please contact us if other specification
(Size,Impedance, Rated Current etc.) is needed.

MLB-160808-0030C25

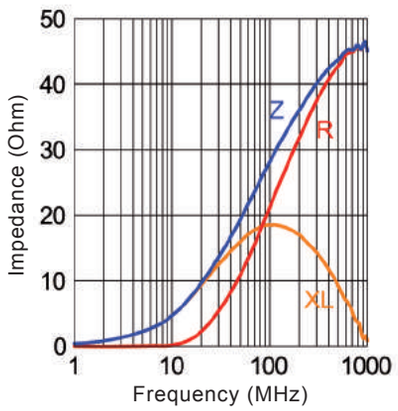

MLB-160808-0060C30

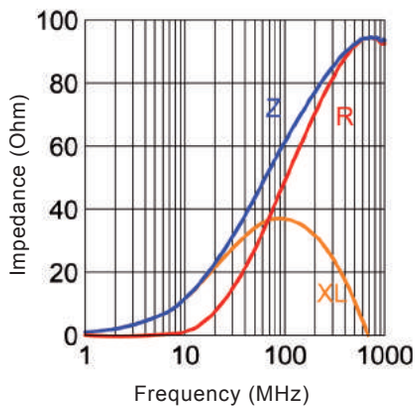

MLB-160808-0080C30

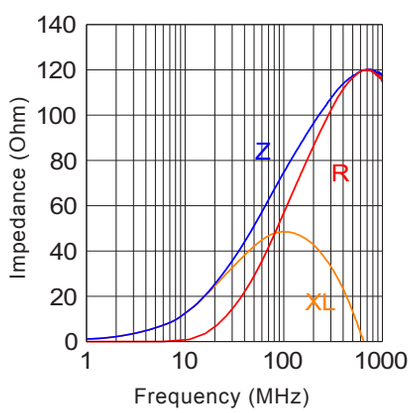

MLB-160808-0120C30

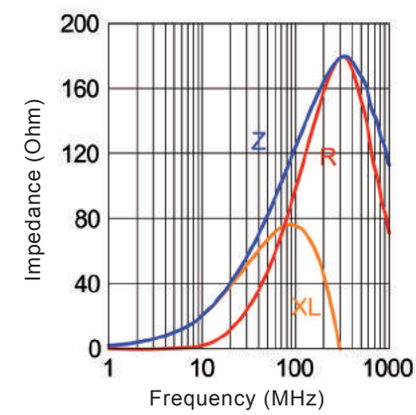

MLB-160808-0220C15

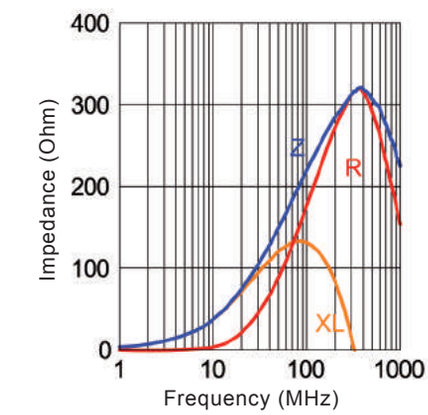

MLB-160808-0300C20

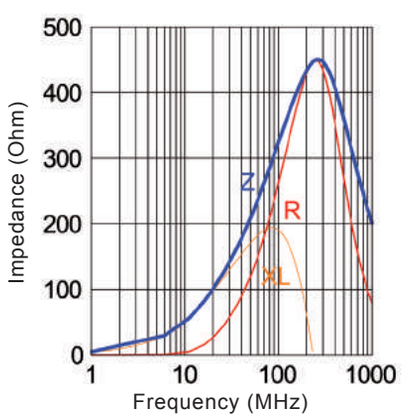

MLB-160808-0600C10

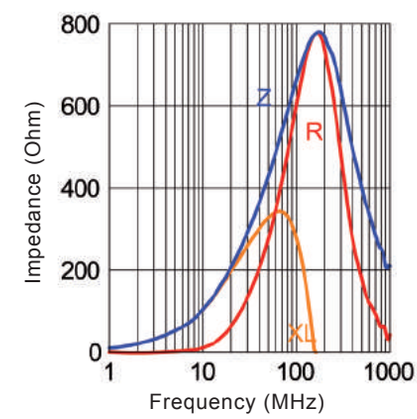

MLB-201209-0033C40

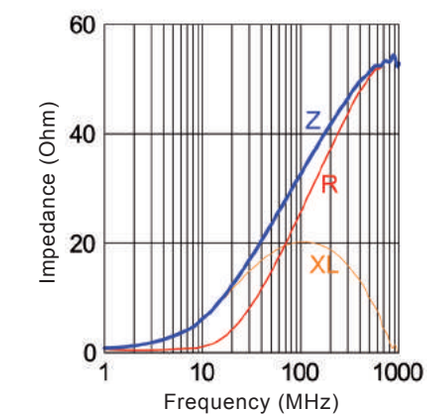

MLB-201209-0060C40

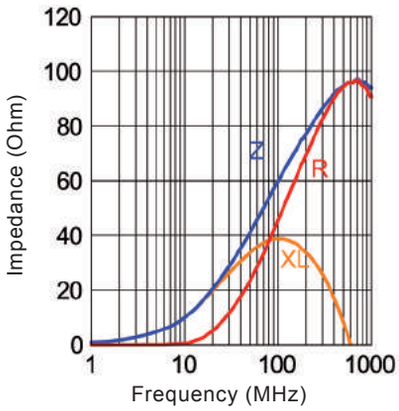

MLB-201209-0080C50

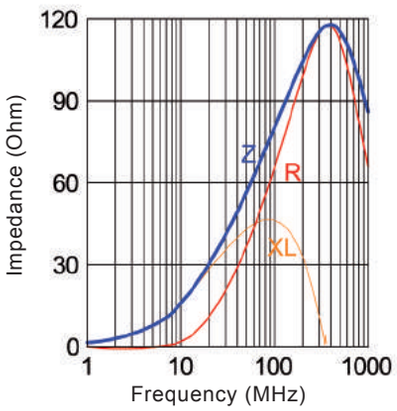

MLB-201209-00120C50

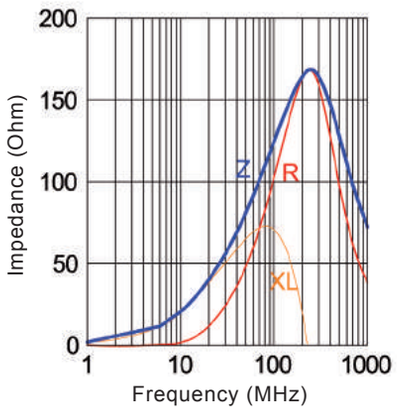

MLB-201209-0250C30

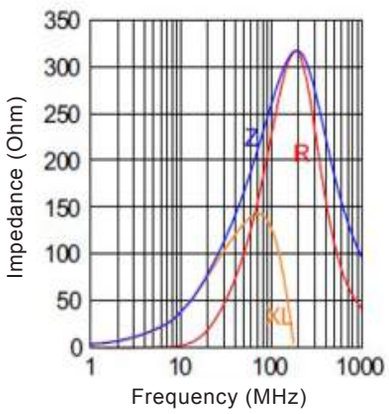

MLB-201209-0300C30

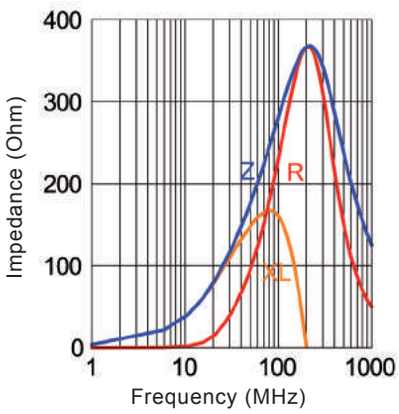

MLB-201209-0600C20

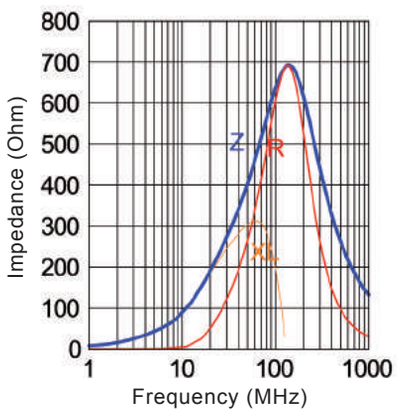

MLB-201209-1000C10

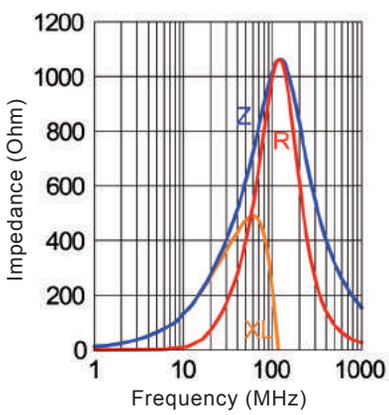

MLB-321611-0080C40

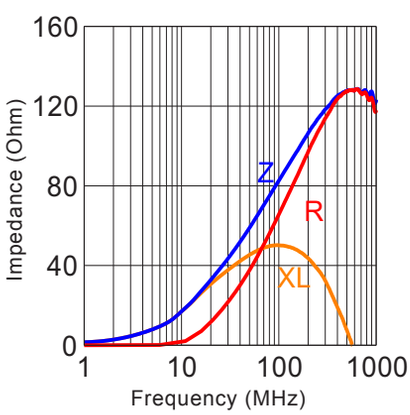

MLB-321611-0120C60

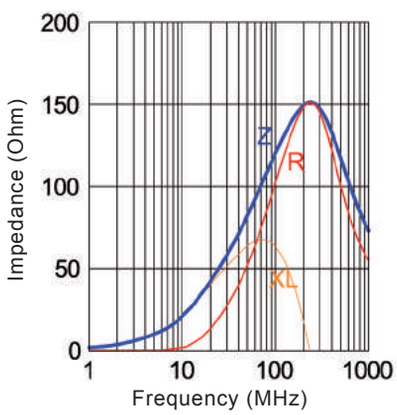

MLB-321611-0300C10

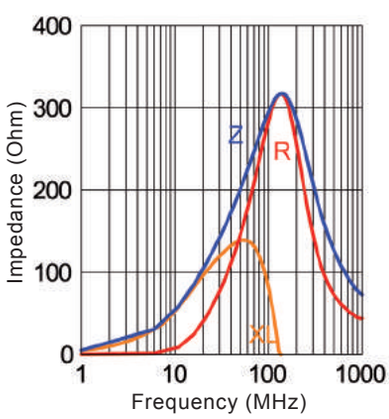

MLB-321611-0600C30

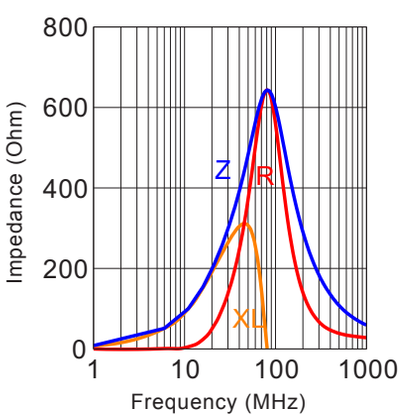

MLB-321611-1000C10

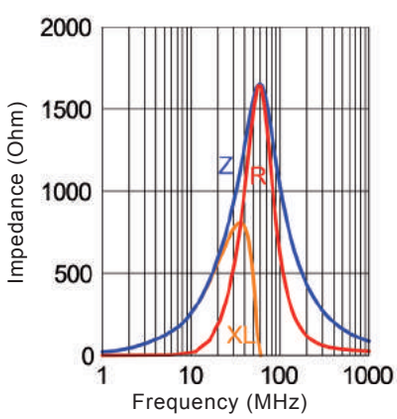

FERRITE CHIP BEAD FOR HIGH SPEED／MLB



Ferrite Chip Bead for high speed application

Feature

- MLB (for High speed) can minimize attenuation of the signal wave form for high speed signal due to ist sharp impedance characteristics.That is much lower impedance in frequency range lower than 100MHz.
- Impedance Range: 26 to 1000 ohm
- Rated Current Range: 100 mA to 500 mA
- Operating temperature Range: -40°C to +125°C
- Soldering Method: Reflow of Wave soldering, suitable for lead free soldering
- Packaging Method : Tape & Reel (per EIA Specifications)
- Storage Temperature : max.40°C, RH 70%

Application

- EMI suppression for various electric equipment by addition of impedance to the circuit.
- It is particular effective with unstable grounding.
- High frequency EMI preventation of computers, printers, VCRs,TVs, and portable telephone.
- High speed signal or frequency (clock) harmonics EMI suppression.
- Clock, VGA data

Part Number Code

MLB	-	160808	-	0600	S	01
Series Name		Size Code		Impedance (ex.0600=600 Ω ± 25%)	Classification	Rated Current
					S=For High Speed Application	01=200 mA

Notes for MLB Series
Please contact our sales department for the application other than above mentioned indication.
Please ask individual data sheet to verify detailed specification and performance.

Shape and Dimensions

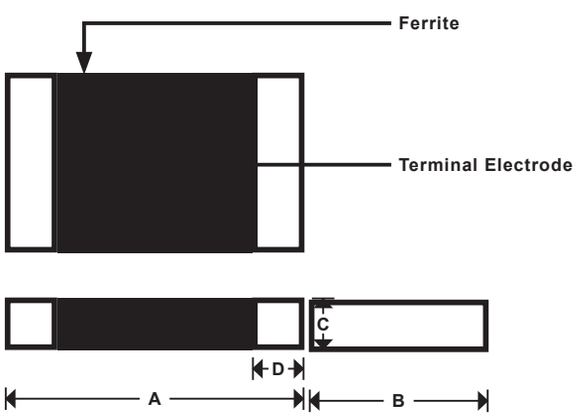

Unit: mm

SIZE CODE	A	B	C	D	Chips/reel
100505(0402)	1.00+/-0.1	0.50+/-0.1	0.50+/-0.1	0.25+/-0.1	10000
160808(0603)	1.60+/-0.2	0.80+/-0.2	0.80+/-0.2	0.3+/-0.2	4000
201209(0805)	2.00+/-0.2	1.20+/-0.2	0.90+/-0.2	0.5+/-0.3	4000
321611(1206)	3.20+/-0.2	1.60+/-0.2	1.10+/-0.2	0.5+/-0.3	3000

FERRITE CHIP BEAD FOR HIGH SPEED／MLB

Part No.	Impedance (Ω)@100MHz±25%	DCR (Ω)max	Rated Current (mA) max
MLB-100505-0120S015	120	0,500	150
MLB-100505-0300S01	300	0,900	100
MLB-160808-0030S03	30	0,300	300
MLB-160808-0060S03	60	0,300	300
MLB-160808-0080S03	80	0,300	300
MLB-160808-0120S02	120	0,300	200
MLB-160808-0150S02	150	0,400	200
MLB-160808-0220S02	220	0,400	200
MLB-160808-0300S02	300	0,500	200
MLB-160808-0600S02	600	0,600	200
MLB-160808-1000S01	1000	1,000	100
MLB-201209-0026S05	26	0,200	500
MLB-201209-0060S04	60	0,300	400
MLB-201209-0120S03	120	0,300	300
MLB-201209-0300S02	300	0,500	200
MLB-201209-0600S02	600	0,600	200
MLB-201209-1000S02	1000	0,800	200
MLB-321611-0120S04	120	0,300	400
MLB-321611-0600S02	600	0,600	200

Please contact us if other specification
(Size,Impedance, Rated Current etc.) is needed.

MLB-100505-0120S015

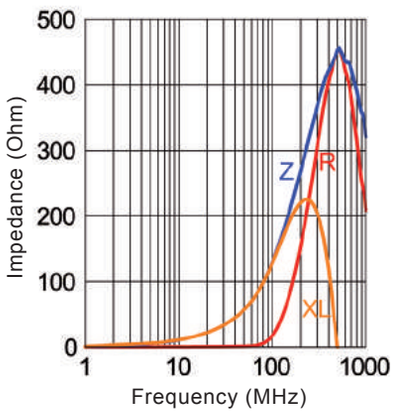

MLB-100505-0300S01

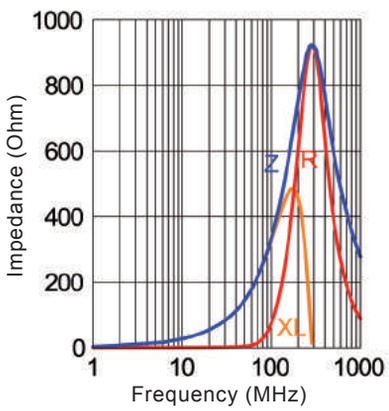

MLB-160808-0030S03

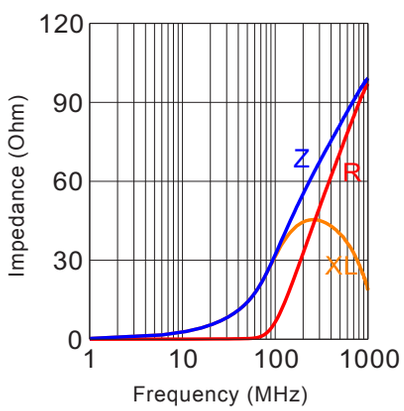

MLB-160808-0060S03

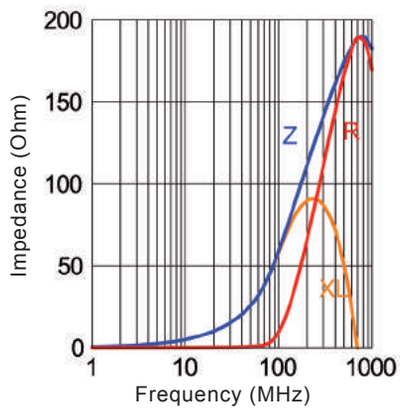

MLB-160808-0080S03

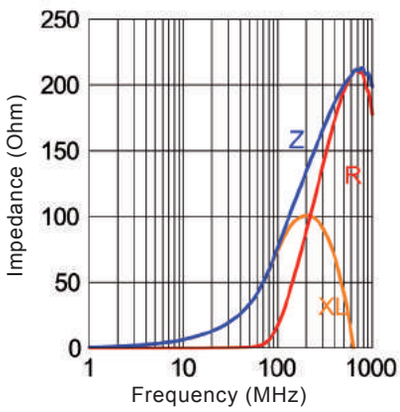

MLB-160808-0120S02

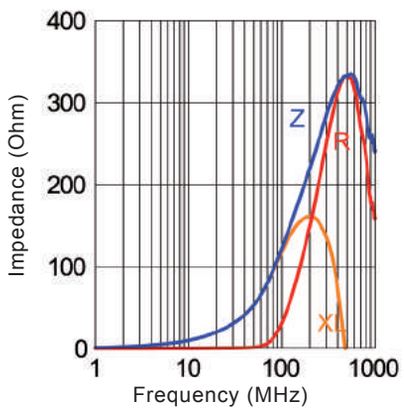

MLB-160808-0150S02

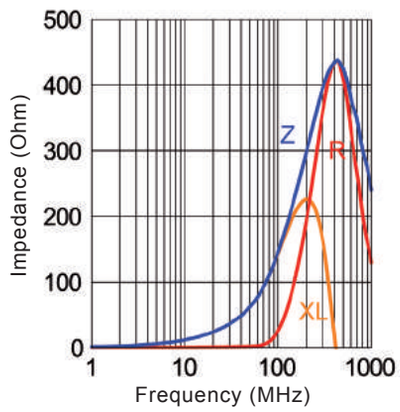

FERRITE CHIP BEAD FOR HIGH SPEED／MLB

MLB-160808-0220S02

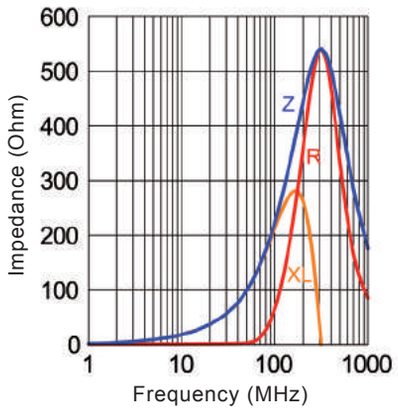

MLB-160808-0300S02

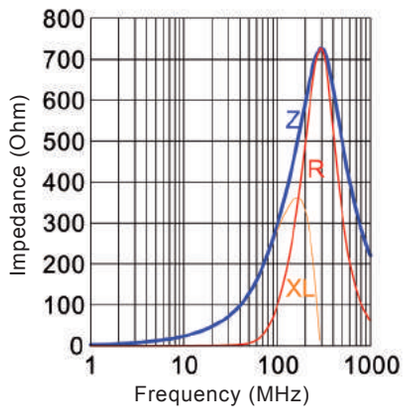

MLB-160808-0600S02

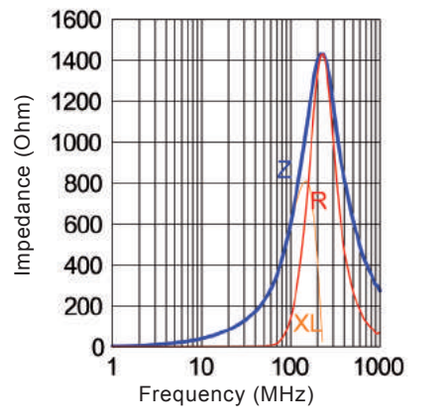

MLB-160808-1000S01

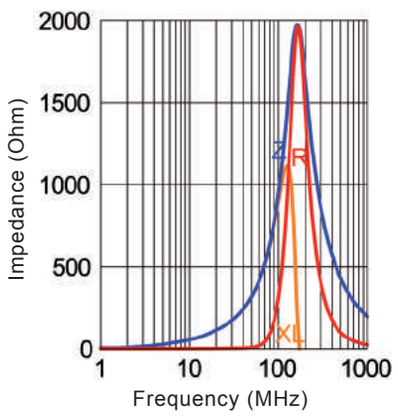

MLB-201209-0026S05

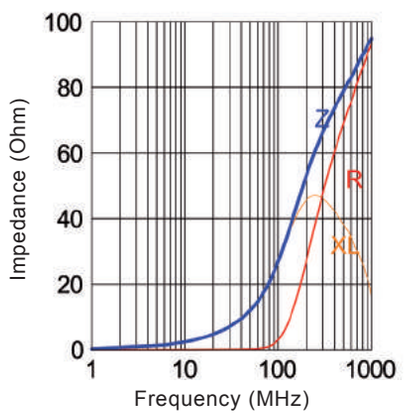

MLB-201209-0060S04

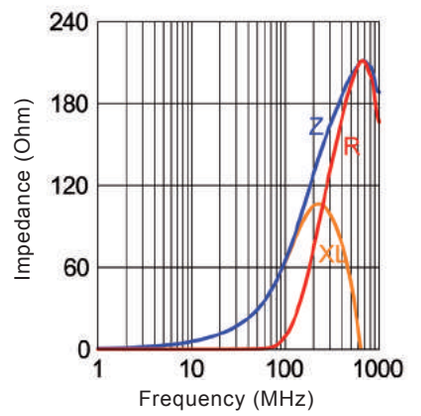

MLB-201209-0120S03

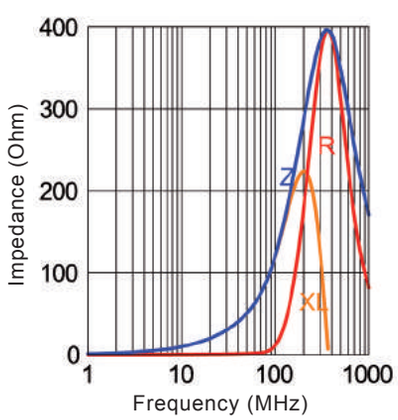

MLB-201209-0300S02

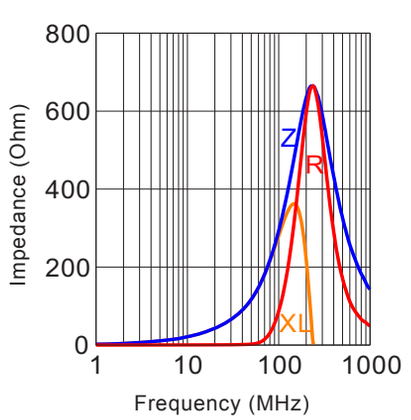

MLB-201209-0600S02

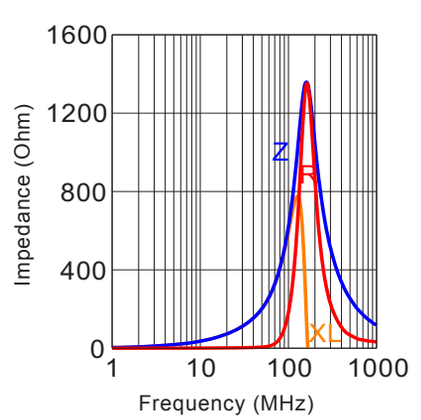

MLB-201209-1000S02

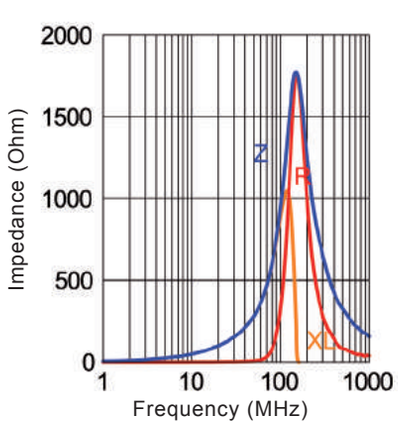

MLB-321611-0120S04

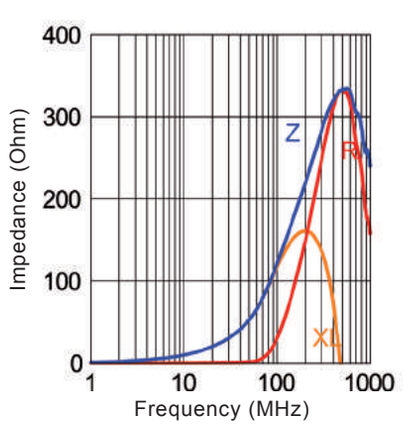

MLB-321611-0600S02

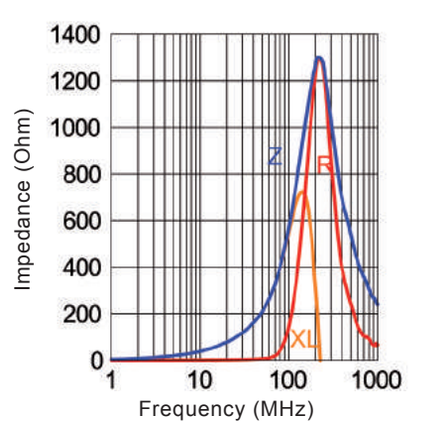

CHIP BEADS DESIGN KIT ESF-17CB

Various Chip Beads in compact booklet

MEMO

GASKETS

SOFT

Stable performance provided with low-compression force

Foam

P75


SOFT GASKET

P79

CONDUCTIVE FOAM

Elastomer

P80

CARBON RUBBER

P81


CONDUCTIVE ELASTOMER

P82


CONDUCTIVE ELASTOMER

WIRE MESH

Wire braided mesh type

Wire mesh

P83

WIRE MESH

Wire mesh+Elastomer core

P83

ELASTO MESH

P84

ELASTO MESH

Copper Beryllium Finger Strips

Hard Gasket

P85

HARD GASKET



Stable electrical conductivity provided with low-compression force.

Feature

- Easy installation onto enclosure, etc. by adhesive tape.
  (Conductive adhesive tape is also available)
- UL94V-0 certified.(Conductive fabric over poly-urethane foam gasket portion.)
  (Except gaskets thinner 1.0 mm)
- UL94 VTM-0 certified adhesive tape.
  (Except conductive adhesive tape)
- Easy processing by scissors.
  (Please contact sales division for custom processing)
- Operating temperature range: -20°C to +70°C

■ Standard length：1m

Structure

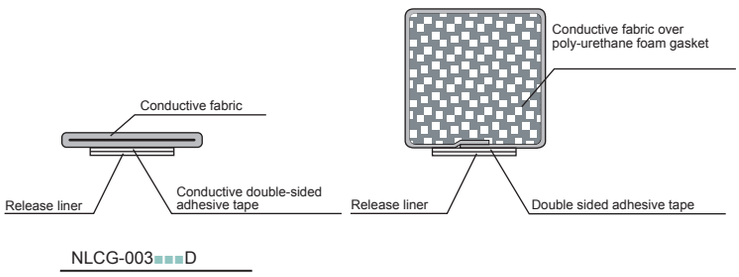

Properties

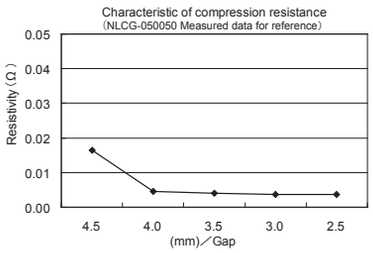

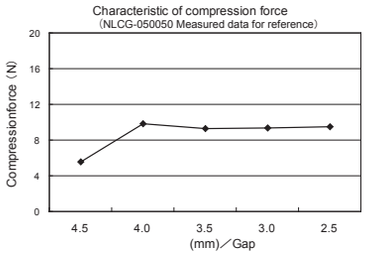

Part Number Guide

NLCG-■■■■■■ ■ L:■■■■

- Length in mm (not necessary for the standard length of 1 m)
- **Suffix "(D)":** *means customer can choose between conductive adhesive tape or adhesive tape.*
  Suffix "D ": *means conductive adhesive tape.*
  Suffix "NO TAPE": *means without adhesive tape.*
  Without Suffix: *means adhesive tape.*
- Width：e.g) 050=5mm / 100=10mm
- Height：e.g) 010=1mm / 120=12mm

e.g)：NLCG-010050 → Height 1mm × Width 5mm

Secondary processing



Kiss cut

Customized thin-out kiss cut

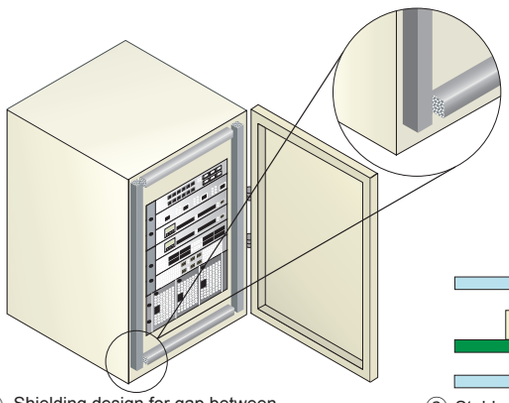

① Shielding design for gap between metal enclosure and door structure



② Stable grounding between PCB and Chassis

※All specifications and characteristics shown herein are subject to change without notice for improvements or changes in specification.
※Galvanic corrosion may occourby contact with other metals.

※The values are measured data for reference, not guaranteed.

SOFT GASKET／NLCG R-PROFILE

NLCG-003030(D) Height:0.3mm Width:3mm	NLCG-003050 D Height:0.3mm Width:5mm	NLCG-003300 D Height:0.3mm Width:30mm	NLCG-010030 D Height:1mm Width:3mm
NLCG-010040 Height:1mm Width:4mm	NLCG-010050(D) Height:1mm Width:5mm	NLCG-010070(D) Height:1mm Width:7mm	NLCG-010100(D) Height:1mm Width:10mm
NLCG-010130 Height:1mm Width:13mm	NLCG-010250 NT Height:1mm Width:25mm	NLCG-015030(D) Height:1.5mm Width:3mm	NLCG-015050(D) Height:1.5mm Width:5mm
NLCG-015070(D) Height:1.5mm Width:7mm	NLCG-015100(D) Height:1.5mm Width:10mm	NLCG-020040 Height:2mm Width:4mm	NLCG-020050(D) Height:2mm Width:5mm
NLCG-020060 D Height:2mm Width:6mm	NLCG-020070(D) Height:2mm Width:7mm	NLCG-020100(D) Height:2mm Width:10mm	NLCG-020150 Height:2mm Width:15mm
NLCG-020210 Height:2mm Width:21mm	NLCG-020235 NT  Height:2mm Width:23.5mm	NLCG-020350 NT  Height:2mm Width:35mm	NLCG-020510 NT Height:2mm Width:51mm
NLCG-020560 Height:2mm Width:56mm	NLCG-025100 NT Height:2.5mm Width:10mm	NLCG-030040(D) Height:3mm Width:4mm	NLCG-030050(D) Height:3mm Width:5mm

※**Suffix ”(D)”:** *means customer can choose between conductive adhesive tape or adhesive tape.*
※**Suffix “D ”:** *means conductive adhesive tape.*
※**Suffix “NO TAPE”:** *means without adhesive tape.*
※**Without Suffix:** *means adhesive tape.*
※The values are measured data for reference, not guaranteed.

SOFT GASKET／NLCG　R-PROFILE

NLCG-030100(D)

Height:3mm Width:10mm

NLCG-035090(D)

Height:3.5mm Width:9mm

NLCG-035120(D)

Height:3.5mm Width:12mm

NLCG-040040(D)

Height:4mm Width:4mm

NLCG-040050(D)

Height:4mm Width:5mm

NLCG-040080(D)

Height:4mm Width:8mm

NLCG-040100(D)

Height:4mm Width:10mm

NLCG-040130(D)



Height:4mm Width:13mm

NLCG-050050(D)

Height:5mm Width:5mm

NLCG-050080

Height:5mm Width:8mm

NLCG-050100(D)

Height:5mm Width:10mm

NLCG-050150 D



Height:5mm Width:15mm

NLCG-060060

Height:6mm Width:6mm

NLCG-060100

Height:6mm Width:10mm

NLCG-065060

Height:6.5mm Width:6mm

NLCG-070100

Height:7mm Width:10mm

NLCG-070130



Height:7mm Width:13mm

NLCG-080080

Height:8mm Width:8mm

NLCG-080100(D)

Height:8mm Width:10mm

NLCG-095090

Height:9.5mm Width:9mm

NLCG-100100

Height:10mm Width:10mm

NLCG-100120

Height:10mm Width:12mm

NLCG-120100(D)



Height:12mm Width:10mm

NLCG-130100(D)



Height:13mm Width:10mm

NLCG-130120 NT



Height:13mm Width:12mm

NLCG-150150



Height:15mm Width:15mm

※**Suffix ”(D)”:** *means customer can choose between conductive adhesive tape or adhesive tape.*
※**Suffix “D ”:** *means conductive adhesive tape.*
※**Suffix “NO TAPE”:** *means without adhesive tape.*
※**Without Suffix:** *means adhesive tape.*
※The values are measured data for reference, not guaranteed.

SOFT GASKET／NLCG R-PROFILE

Size variation Rectangular Profile

●: Double sided adhesive tape type
○: Conductive adhesive tape type

Height \ Width	3	4	5	6	7	8	9	10	12	13	15	21	23.5	25	30	35	51	56
0.3	●○		○												○			
1	○	●	●○		●○			●○		●					○			
1.5	●○		●○		●○			●○										
2		●	●○	○	●○			●○			●	●						●
2.5																		
3		●○	●○	●				●○										
3.5							●○		●○									
4		●○	●○			●○		●○		●○								
5			●○			●		●○			○							
6				●				●										
6.5				●														
7								●		●								
8						●		●○										
9.5							●											
10								●	●									
12								●○										
13								●○										
15											●							

Unit: mm

SOFT GASKET／NLCG D-PROFILE

NLCG-D015030(D)

Height:1.5mm Width:3mm

NLCG-D020050 NT

Height:2mm Width:5mm

NLCG-D025020 D

Height:2.5mm Width:2mm

NLCG-D030030(D)

Height:3mm Width:3mm

NLCG-D030070

Height:3mm Width:7mm

NLCG-D035030 NT

Height:3.5mm Width:3mm

NLCG-D040060

Height:4mm Width:6mm

NLCG-D065090

Height:6.5mm Width:9mm

NLCG-D095120

Height:9.5mm Width:12mm

※**Suffix ”(D)”:** *means customer can choose between conductive adhesive tape or adhesive tape.*
※**Suffix “D ”:** *means conductive adhesive tape.*
※**Suffix “NO TAPE”:** *means without adhesive tape.*
※**Without Suffix:** *means adhesive tape.*
※The values are measured data for reference, not guaranteed.

CONDUCTIVE FOAM／XYT



Thin EMI sheet gasket made with conductive foam

Feature

- Suitable solution for grounding for space saving areas such as mobile equipments, flat panel monitors etc.
- Thin and well cushioned foam gasket.
- Through hole process is provided. Conductivity between top and bottom surface is available. Custom profiles such as cutting, punching etc. are also available. (Conductive adhesive is used.)

Product structure

● Outline



● Cross section

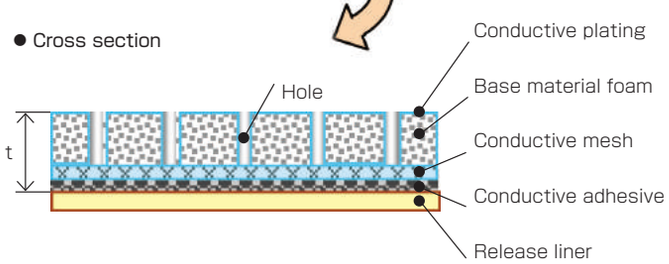

Properties

● Compression vs. Contact resistance (XYT-0.5)

Size: 25 x 25 mm

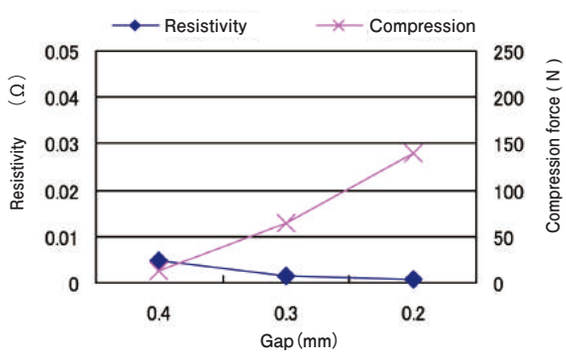

Specifications

Part No.	XYT-0.3	XYT-0.5	XYT-0.7
Base material	Foam: Olefinic foam / Mesh: Polyester		
Plating	Ni-Sn/Cu plating		
Conductive adhesive	Acrylic conductive adhesive		
Color	Black		
Total thickness t (mm)	0.3	0.5	0.7
Resistivity in the thickness direction (25mm² / 1kg load)	< 0.1 Ω		
Peel adhesion at 180°(25mm width)	Min 1kgf		

※All specifications and characteristics shown herein are typical values, but are not guaranteed.
※All specifications and characteristics shown herein are subject to change without notice for improvements or changes in specification.

CARBON RUBBER／CSR

Carbon filled silicone based rubber.

Feature

- Carbon Rubber is a good shielding gasket and an excellent environmental seal.
- Excellent formability available , various extruded shapes as shown below.

Material

- Conductive silicone

- Standard length: 10m

R type

Unit: mm

Part No.	A
CSR-R-15	1.5
CSR-R-20	2.0
CSR-R-30	3.0
CSR-R-40	4.0
CSR-R-50	5.0

O type

Unit: mm

Part No.	A	B
CSR-0-25-15	2.5	1.5
CSR-0-60-30	6.0	3.0
CSR-0-65-30	6.5	3.0
CSR-0-100-65	10.0	6.5

P type



Unit: mm

Part No.	A	B	C
CSR-P-125-50	12.5	5.0	6.0
CSR-P-170-72	17.0	7.2	7.5
CSR-P-240-77	24.0	7.7	11.0

D type



Unit: mm

Part No.	A	B
CSR-D-40-15	4.0	1.5
CSR-D-45-25	4.5	2.5

U type



Unit: mm

Part No.	A	B	C	D
CSR-U-48-48	4.8	4.8	3.2	1.6
CSR-U-55-110	5.5	11.0	8.0	2.5
CSR-U-80-130	8.0	13.0	9.5	3.5
CSR-U-95-130	9.5	13.0	9.5	5.0



Conductive Elastomer as sheet and strip

Feature

- The Kitagawa Electrically Conductive Elastomers offer excellent shielding and environmental sealing. They are offered in a range of materials and outlines to meet various applications.

Material

- Silicone/Nickel

Shore A hardness		68±6
Volume Resistivity (Ω/cm)		0,1
Temperature Range (°C)		-55 to +200
Density (g/cm^3)		3.5
Tensile strength (%)		75
Colour		Black
Shielding Effectiveness (dB)	H-Field 10 KHz	72
	E-Field 1MHz	115
	P-Field 1GHz	85

Standard Sheets - PL -

Part No.	A(mm)	B (mm)	T (mm)	Tolerance (mm)
SG-PL-	200.00	-200.00	-0.50	± 0.08
SG-PL-	200.00	-200.00	-0.80	± 0.13
SG-PL-	200.00	-200.00	-1.00	± 0.15
SG-PL-	200.00	-200.00	-1.50	± 0.20
SG-PL-	200.00	-200.00	-2.00	± 0.20

Max. size 350x1040 (Rolled)

Rectangular Strips - RE -



Part No.	A (mm)	B (mm)	L (mm)	A Tolerance (mm)	B
SG-RE-	1.00	-3.00	-1.000	± 0.15	± 0.18
SG-RE-	1.50	-3.00	-1.000	± 0.20	± 0.20
SG-RE-	2.00	-2.50	-1.000	± 0.20	± 0.18
SG-RE-	2.00	-3.00	-1.000	± 0.20	± 0.18
SG-RE-	2.00	-4.00	-1.000	± 0.20	± 0.20

CONDUCTIVE ELASTOMER / SG-FO / SG-TU / SG-RO



Conductive Elastomer in 3 different materials

Feature

- The Kitagawa Conductive Elastomer EMI-Gaskets feature an abrasion-resistant, silver-filled elastomer applied over a non-conductive extruded silicon core.

Material

- Elastomer binder : Silicone
- Conductive particles : Ag/Cu

Volume Resistivity (Ω/cm)	0,008		
Coating Thickness (mm)	0,15±0,1		
Breaking Elongation	+25%		
Colour	Beige		
Shielding Effectiveness (dB)	SG-FO	SG-TU	SG-RO
H-Field 10KHz	72	60	67
E-Field 1MHz	115	100	130
P-Field 1GHz	85	90	110







Elastomer core: Silicon foam (non conductive)	
Density	0,43 g/cm3
Shore A hardness	30°+/-6
Breaking elongation	>40 %
Compression Set	< 40 %
Temperature resistance	-55/+125° C
Part No. D_A (mm)	Tolerance (mm)
SG-FO-1.50	± 0.18
SG-FO-1.80	± 0.20
SG-FO-2.00	± 0.20
SG-FO-2.30	± 0.20
SG-FO-2.50	± 0.25
SG-FO-2.80	± 0.25
SG-FO-3.00	± 0.25
SG-FO-3.30	± 0.25
SG-FO-3,80	± 0.30
SG-FO-4.00	± 0.30
SG-FO-4.30	± 0.30
SG-FO-4.50	± 0.30
SG-FO-4.80	± 0.35
SG-FO-5.00	± 0.35
SG-FO-5.30	± 0.35
SG-FO-5.50	± 0.35
SG-FO-6.00	± 0.35

Elastomer core: Silicon tube (non conductive)	
Density	1,14 g/cm3
Shore A hardness	60°±6
Breaking elongation	>40 %
Compression Set	< 35 %
Temperature resistance	-55/+125° C
Part No. D_A D_I (mm)	Tolerance (mm)
SG-TU-1.30 -0.50	± 0.15
SG-TU-1.50 -0.50	± 0.15
SG-TU-1.60 -0.50	± 0.20
SG-TU-1.80 -1.00	± 0.20
SG-TU-2.00 -1.00	± 0.20
SG-TU-2.10 -1.00	± 0.20
SG-TU-2.30 -1.00	± 0.20
SG-TU-2.60 -1.00	± 0.25
SG-TU-3.00 -1.00	± 0.25
SG-TU-3.30 -1.50	± 0.25
SG-TU-3.80 -1.50	± 0.25
SG-TU-4.30 -1.50	± 0.25
SG-TU-4.80 -2.00	± 0.25
SG-TU-5.30 -2.00	± 0.30
SG-TU-5.80 -2.00	± 0.35

Elastomer core: Silicon solid round (non conductive)	
Density	1,08 g/cm3
Shore A hardness	60° ±7
Breaking elongation	>40 %
Compression Set	< 35%
Temperature resistance	-55/+125° C
Part No. D_A (mm)	Tolerance (mm)
SG-RO-1.20	± 0.15
SG-RO-1.50	± 0.15
SG-RO-1.80	± 0.15
SG-RO-2.00	± 0.15
SG-RO-2.30	± 0.20
SG-RO-2.50	± 0.20
SG-RO-2.80	± 0.25
SG-RO-3.00	± 0.25
SG-RO-3.30	± 0.25
SG-RO-3.50	± 0.25
SG-RO-3.80	± 0.25
SG-RO-4.00	± 0.30
SG-RO-4.30	± 0.30
SG-RO-4.50	± 0.30
SG-RO-4.80	± 0.30
SG-RO-5.50	± 0.35

Contact us for other size not listed above.

WIRE MESH／WMS・WMR・WMH・WMD



Standard wire mesh gaskets

Feature

- Mesh structure conforms to irregular surfaces providing reliable shielding effects.
- No unbraiding or wire loosening type also available, allowing cutting to desired length.

Material

- Nickel-copper alloy (Monel) wire
- Custom cutting is available up on request

Rectangular



Unit: mm

Part No.	H	W
WMS-15-15-M	1.5	1.5
WMS-15-32-M	1.5	3.2
WMS-23-23-M	2.3	2.3
WMS-23-32-M	2.3	3.2
WMS-32-32-M	3.2	3.2
WMS-32-39-M	3.2	3.9
WMS-47-47-M	4.7	4.7

Round

Unit: mm

Part No.	D
WMR-18-M	1.8
WMR-24-M	2.4
WMR-32-M	3.2
WMR-39-M	3.9
WMR-47-M	4.7
WMR-63-M	6.3
WMR-92-M	9.2

P section



Unit: mm

Part No.	D	W
WMH-19-95-M	1.9	9.5
WMH-25-128-M	2.5	12.8
WMH-32-126-M	3.2	12.6
WMH-63-158-M	6.3	15.8

Double P section



Unit: mm

Part No.	D	W
WMD-19-92-M	1.9	9.2
WMD-19-126-M	1.9	12.6
WMD-19-158-M	1.9	15.8
WMD-25-126-M	2.5	12.6

ELASTO MESH／ETAB

Elastomer core with arrowhead allows easy installation on enclosures.

Feature

- Easier installation compared with conventional formed gaskets (rectangular or round).
- Small compression force, the special structure prevents fall-off of the gasket.
- No unbraiding or wire loosening type, allowing cutting to desired length.

Material

- Metal mesh / Nickel-copper alloy (Monel) wire
- Core material / Silicone

Cross-section

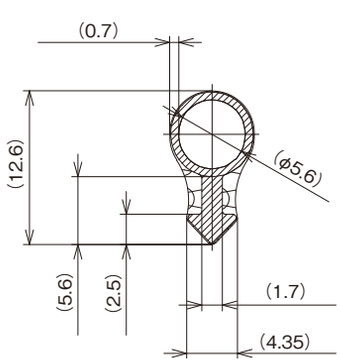

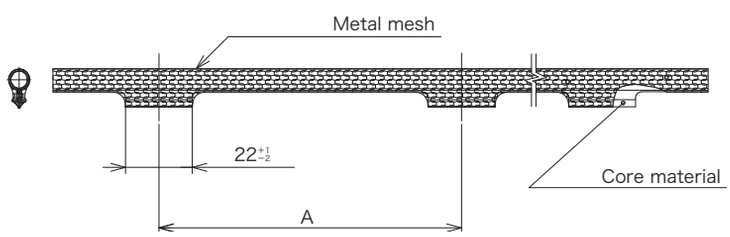

Unit: mm

Part No.	A
ETAB-79.5-***-***	79.5 +1 −2
ETAB-100 -***-***	100 +1 −2

*** indicates overall length and the length between the cut face and the starting point of the arrowhead.(Contact us for the details.)

ELASTO MESH／EMS・EMR・EMC・EMH・ETC



Wire mesh gasket with an excellent elasticity elastomer core

Feature

- EMI/RFL gasket with silicone or chloroprene etc core enclosed in a wire mesh.
- High effectiveness can be gained with excellent elasticity and form recovery properties providing secure contact between the wire mesh and the metal face.

Material

- Metal mesh / Nickel-copper alloy (Monel) wire
- Core material / Refer to the table below

■ Standard length: 10m

End of Part number	Material	
NS	Chloroprene	Sponge
SS	Silicone	
ST		Tube

Installation example

Rectangular



Insertion in groove assembly

Round

Adhesive assembly

Rectangular

Spot-welding assembly

P section



Rivet assembly

Rivet assembly

Rectangular



Unit: mm

Part No.	H	W
EMS-100-100-MNS	10	10
EMS-100-200-MNS	10	20
EMS-120-200-MNS	12	20
EMS-150-150-MNS	15	15
EMS-150-200-MNS	15	20
EMS-200-200-MNS	20	20

(Latex sponge core type is available)

Unit: mm

Part No.	H	W
EMS-16-32-MSS	1.6	3.2
EMS-32-32-MSS	3.2	3.2
EMS-32-47-MSS	3.2	4.7
EMS-47-47-MSS	4.7	4.7

(Wire-loosening protection type is available)

Round (Gasket type)

Unit: mm

Part No.	D
EMR-15-MST	1.5
EMR-18-MST	1.8
EMR-24-MST	2.4
EMR-32-MST	3.2
EMR-47-MST	4.7
EMR-62-MST	6.2

(Wire-loosening protection type is available)

Unit: mm

Part No.	D
EMR-60-MS-NS	6
EMR-80-MS-NS	8
EMR-100-MS-NS	10
EMR-120-MS-NS	12
EMR-130-MS-NS	13
EMR-150-MS-NS	15

Round (Cable shield type)



Unit: mm

Part No.	D1	D2
EMC-40-20-MST	4.0	2.0
EMC-50-30-MST	5.0	3.0
EMC-60-40-MST	6.8	4.0

P section



Unit: mm

Part No.	D	W
EMH-32-126-MST	3.2	12.6
EMH-32-158-MST	3.2	15.8
EMH-32-190-MST	3.2	19.0

Round (Non silicone type)

Unit: mm

Part No.	D
ETC-20-14-FMSTT	2.4

Feature

- No Siloxane gas is generated.
- Core material generates no dioxin gas when burnt.

Material

- Metal mesh / Nickel-copper alloy (Monel) wire (Processed for wire-loosening protection)
- Core material / Elastomer tube

Various selection of Copper Beryllium Finger Strips

Feature

- Copper beryllium owns its wide range of application to the unique performance qualities it has:
  - extraordinary elasticity
  - strength
  - fatigue strength
  - high conductivity
  - resistance against environmental influences such as ozone, epipolar rays and light, also against solvents and corrosion.
- Furthermore, copper beryllium can be used under a wide temperature range and is not burnable or flammable. It does not evolve gas either. If handled correctly, it acts self purificating, for example when it is employed as a door shield for opening and closing.

Technical Data

Specific gravity	8,4 g/cm^3
Fusing point	900 °C
Coefficient of expansion (20-200 °C)	17 10^{-6} /°C
Thermal conductivity	0.27 cal/cm s °C; 1.13 W/cm °C
Diamond pyramid hardness	350-430 kp/mm^2
Tensile strength	1200-1450 N/mm^2
Fatigue strength, load application 10^8	250-290 N/mm^2
Modulus of elasticity	135000 N/mm^2
Torsion modulus	47000 N/mm^2
Spring bending limit	820-950 N/mm^2
Electric conductivity	12.5-13 m/Ωmm^2

Plating finishes
-01 Bright finish
-02 Tin plated
-03 Silver plated
-04 Nickel plated
-05 Gold plated

Ordering information		Part No.		Finish-ID.		length (mm)
	CB-	xxxx	-	xx	-	xxxxx

CB-0002

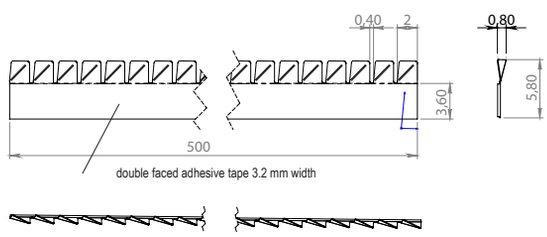

CB-0004

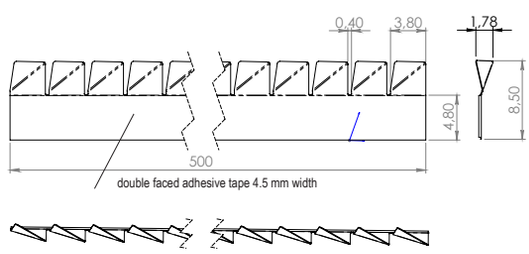

CB-0005

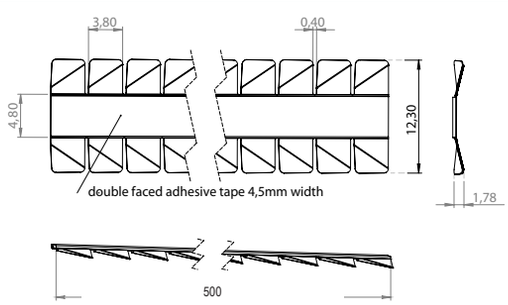

CB-0006

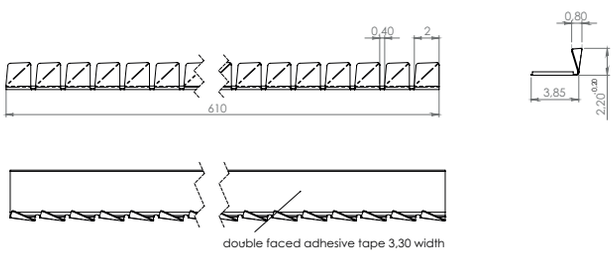

Unit: mm

COPPER BERYLLIUM FINGER STRIPS／CB

CB-0007

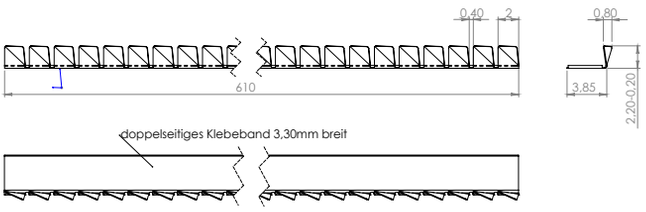

CB-0008

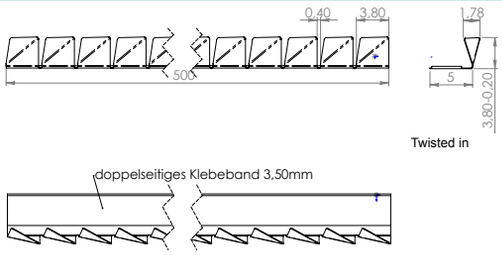

CB-0009

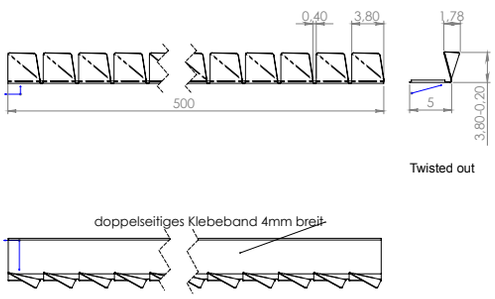

CB-0010

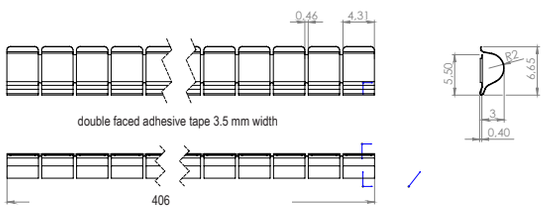

CB-0011

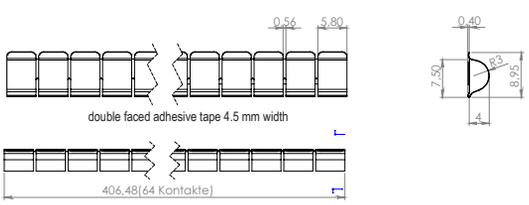

CB-0012

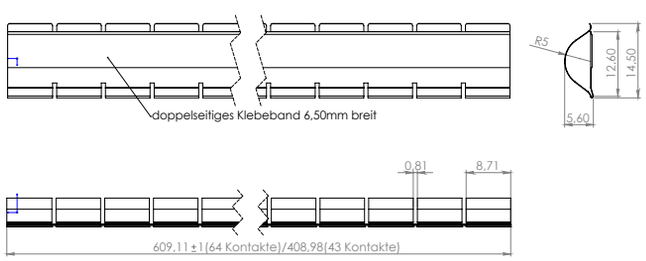

CB-0013

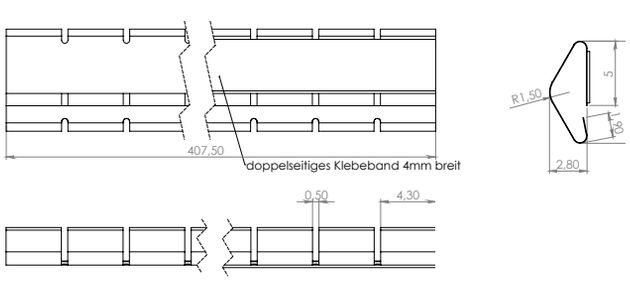

CB-0014

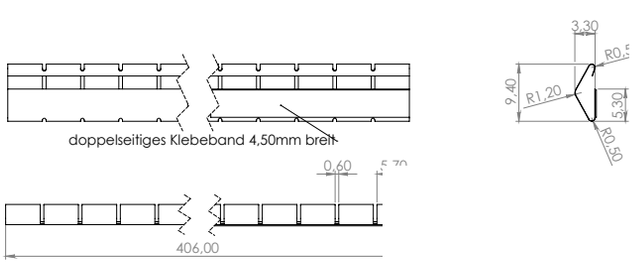

CB-0015

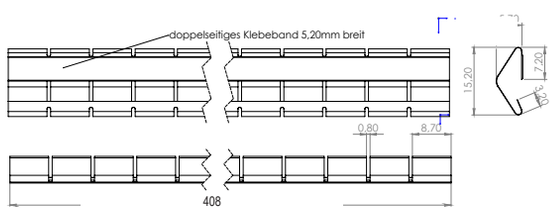

CB-0016

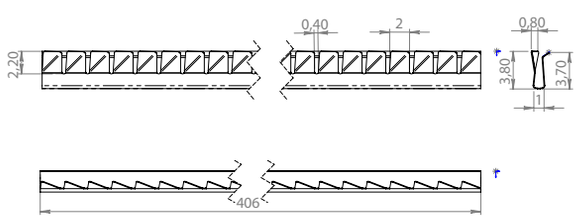

Unit: mm

CB-0017

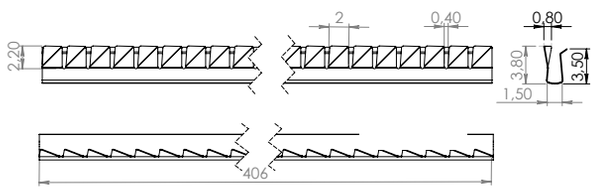

CB-0018

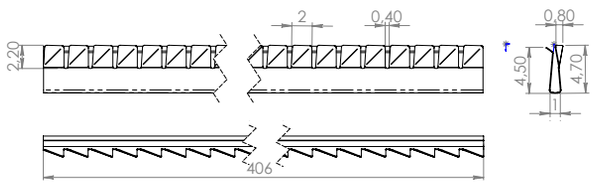

CB-0019

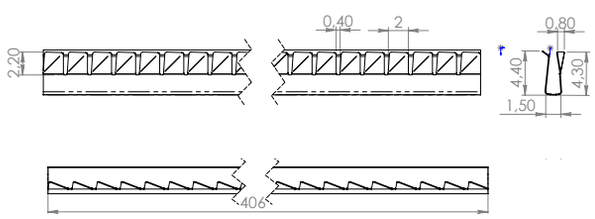

CB-0020

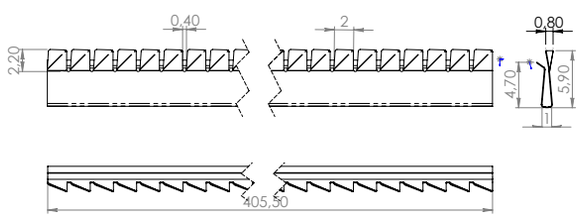

CB-0021

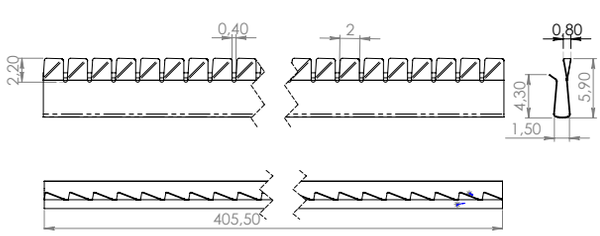

CB-0022

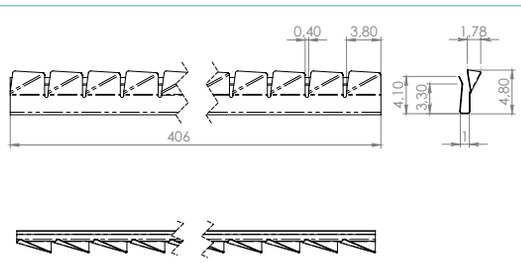

CB-0023

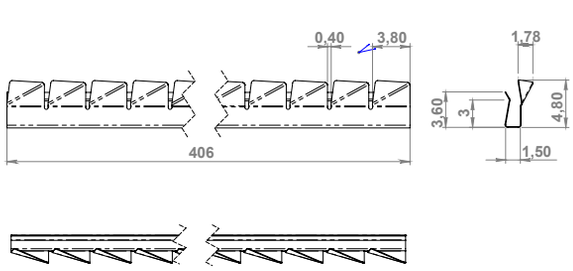

CB-0024

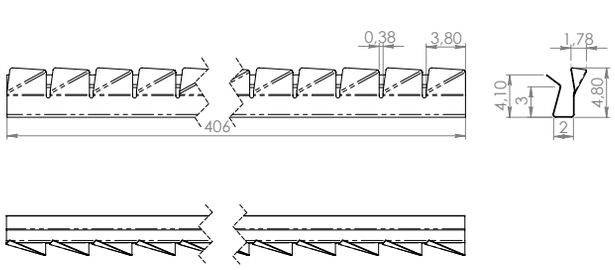

CB-0025

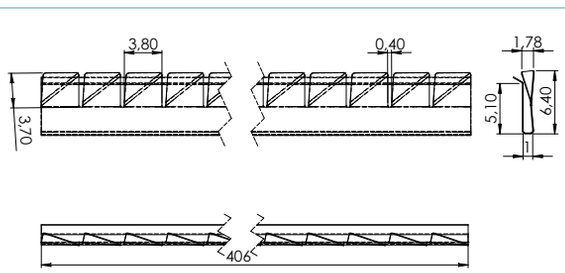

CB-0026

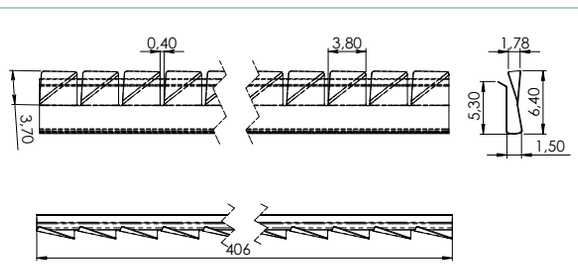

Unit: mm

COPPER BERYLLIUM FINGER STRIPS／CB

CB-0027

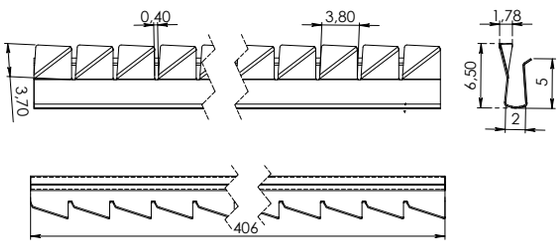

CB-0034

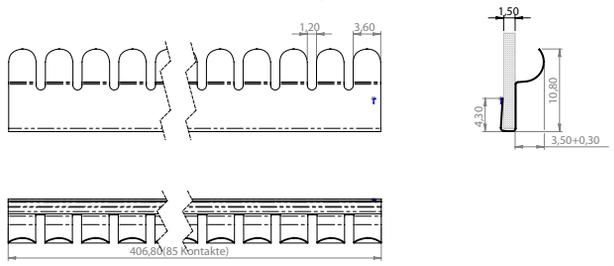

CB-0036

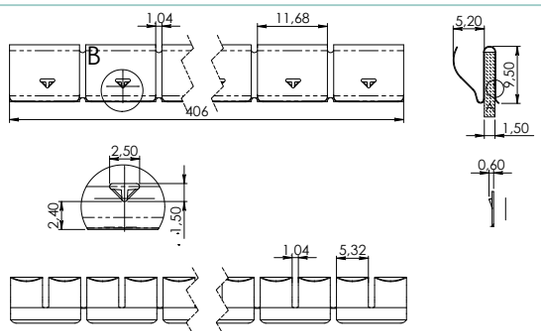

CB-0037

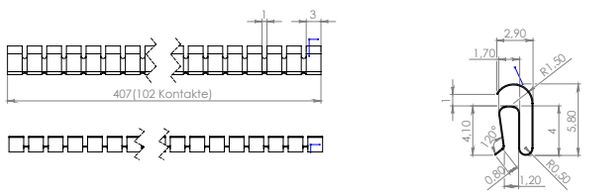

CB-0038

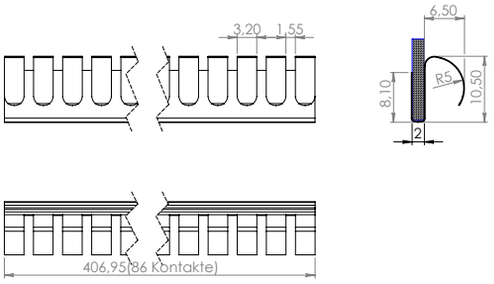

CB-0039

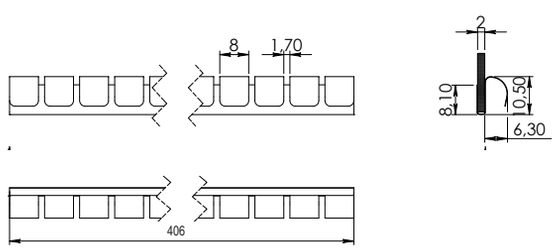

CB-0042

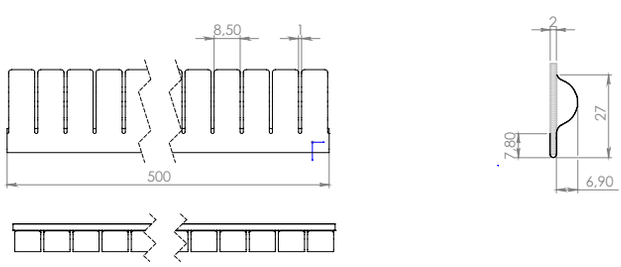

CB-0044

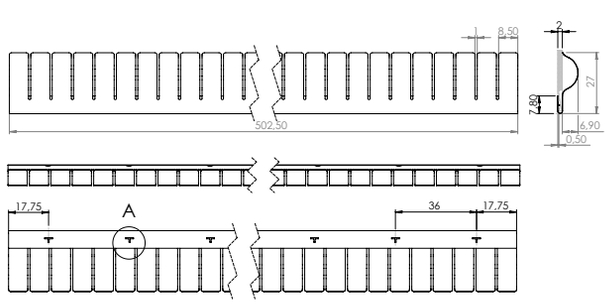

CB-0045

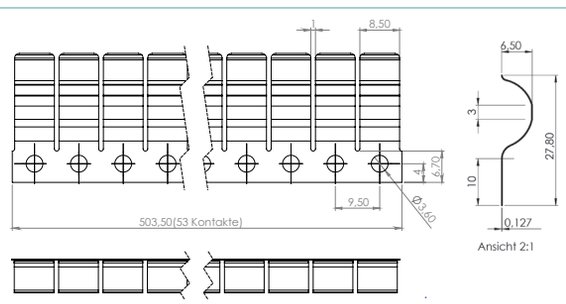

CB-0048

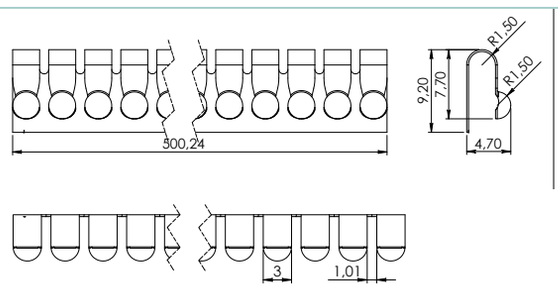

Unit: mm

CB-0049

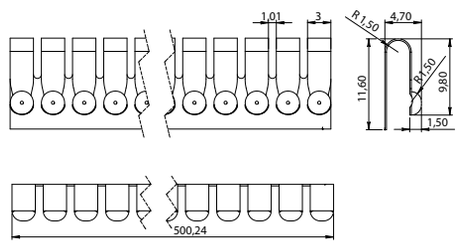

CB-0050

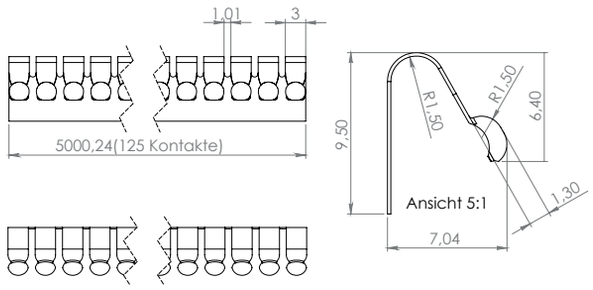

CB-0051

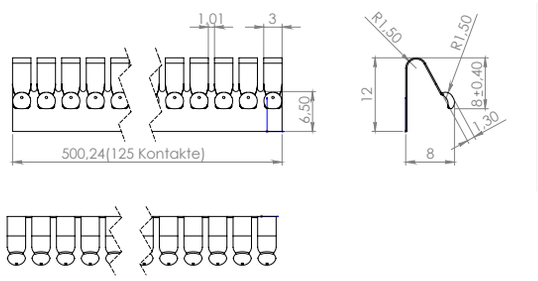

CB-0057

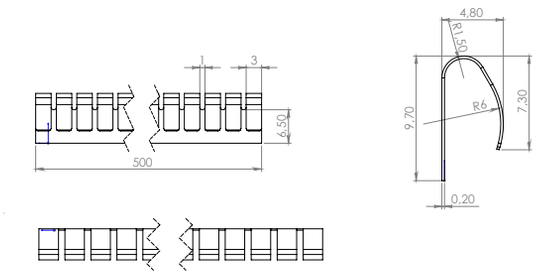

CB-0059

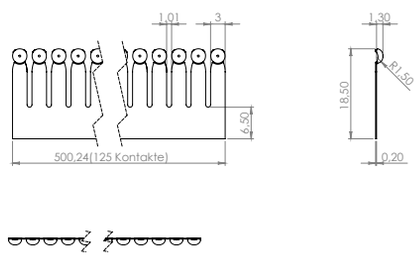

CB-0060

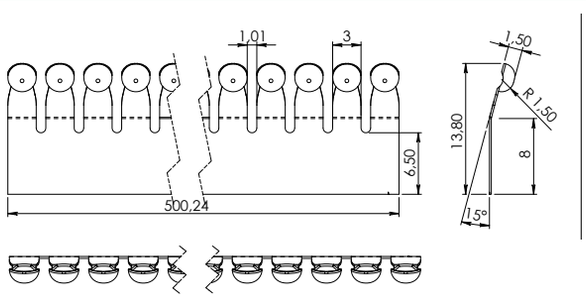

CB-0061

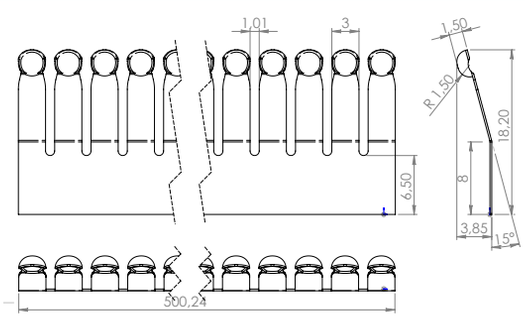

CB-0062

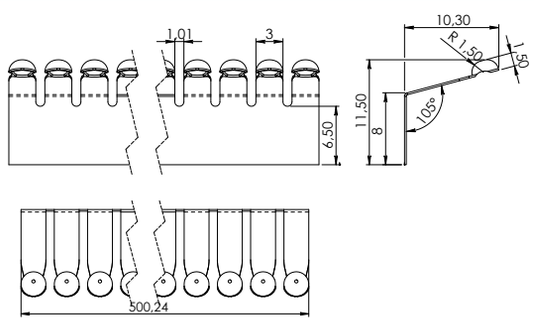

CB-0063



Unit: mm

CONDUCTIVE TAPES／SHEETS

CONDUCTIVE FABRIC

Conductive fabric tape

Conductive fabric

CONDUCTIVE FABRIC TAPE

CONDUCTIVE FABRIC TAPE

Technical adhesive tape

TECHNICAL ADHESIVE TAPE

METAL FOIL

Low-resistivity type using embossed metal foil and conductive adhesive material.

Metal foil (embossed)

Embossed type

COPPER EMBOSSING TAPE

Metal foil

Standard type

CU/ AL TAPE

CLEAR CONDUCTIVE FILM

ITO, Indium Tin Oxide, conductive film has superior optical transparency.

Clear Conductive Film

TRANSPARENT
CONDUCTIVE FILM

THIN FILM

Super-thin conductive film with thickness of 35 μm.

Thin film

REMILESS

CONDUCTIVE FABRIC TAPE／CSTK



Thin and durable carbon-coated type

Feature

- Carbon-coating protects from the galvanic corrosion suffered by metal foils.
- Carbon-coated special knitting provides no yarn-loosening or fuzz on the surface.
- Carbon-coated tape with low resistivity, effective against electrostatic discharge.

Material

- Conductive woven fabric / Cu-Ni plated woven fabric with carbon-coating (UL510FR)
- Standard length: 20m



Part No.	(mm) Width	(mm) Thickness	adhesive strength	Resistivity
CSTK-008	8	0.1	8.53 N/25mm／Width	0.04 Ω/□20mm
CSTK-010	10			
CSTK-015	15			
CSTK-020	20			
CSTK-025	25			
CSTK-030	30			
CSTK-040	40			
CSTK-060	60			
CSTK-250	250			
CSTK-300	300			

※The values are measured data for reference, not guaranteed.

CONDUCTIVE FABRIC TAPE／CSTK-T



Thinned conductive fabric tape with 30μm in overall thickness

Feature

- Super-thin at 30μm in overall thickness suitable for mobile device.
- The flexible, and easy to fixed curved surface.
- Conductive adhesive provide top and bottom conduction.
- Surface resistivity: 0.1Ω/□ or less, Resistivity between top and bottom: 0.1Ω or less.



Material

- Base material / Conductive non-woven fabric
- Adhesive layer / Conductive adhesion

※Custom cuting is available up on request.

(mm)※1 Thickness	adhesive strength	Surface resistivity	Electric resistivity between top and bottom
0.03	≧6N/25mm	≦0.1Ω／□	≦0.1Ω

※ 1)Including adhesive layer

※The values are measured data for reference, not guaranteed.

TECHNICAL ADHESIVE TAPES / CFT-CS / CMP-CS

Polyamid-fleece, metal-coated, with high-quality acrylic adhesive and very good conductivity

Feature

- For usage as screening material (EMC). Also available with a covering on the fleece-side.
- Surface resistivity of the non-woven ＜ 0.05Ω/□
- Ohmic resistance ＜ 0.1Ω
- operating temperature of the whole laminate up to 90°C
- also available with covering for painting process applications.

Material

CFT-CS:
- Foil: Conductive, metallized PA-fleece (copper/tin)
- Coating: Conductive acrylic adhesive

CMP-CS:
- Foil: Same as CFT-CS with additional Polyester-cover (red)
- Coating: Conductive acrylic adhesive

Properties

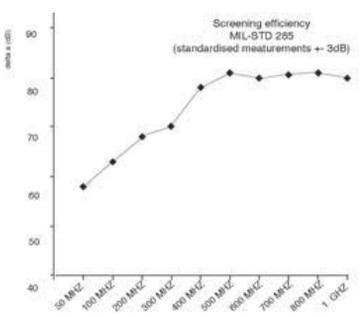

Part No.	(mm) Width	Cover Width	Roll (m)
CFT-CS-10	10	no Cover	33
CFT-CS-20	20	no Cover	33
CMP-CS-10/7	10	7	33
CMP-CS-20/17	20	17	33
CMP-CS-13	13	13	33

Width between 2 mm - 590 mm available upon request

※The values are measured data for reference, not guaranteed.

COPPER EMBOSSING TAPE／CCTE-C

Embossed parts of the metal foil make direct contact with the object

Feature

- Embossed parts are bent to provide direct contact with the object.
- Large contact area provides stable contact.

Material

- Rolled copper foil
- Standard length:20m

※Custom cuting is available up on request.

Part No.	(mm) Width	(mm) Thickness	adhesive strength	Resistivity
CCTE-10-C	10	0.13	10.1 N/20mm／Width	0.01 Ω/□20mm
CCTE-20-C	20			
CCTE-A4-C※1	(A4)			

※ 1)Sheet type

※The values are measured data for reference, not guaranteed.

CONDUCTIVE TAPE / CCT

Thin and flexible metal foil tape backed by a conductive filler adhesive

Feature

- Easy application same uses as a transparent tape.
- High shielding effectiveness due to highly conductive adhesive tape.
- Easy cutout or configuration for optimum shielding effectiveness.

Dimension		Supporting Base		
width (mm)	length (Mtr)	Soft – Copper	Soft – Aluminium	Soft – Copper doublesided tin-coated
10	33	CCT-10-C	CCT-10-A	CCT-10-CS
15	33	CCT-15-C	CCT-15-A	CCT-15-CS
20	33	CCT-20-C	CCT-20-A	CCT-20-CS
25	33	CCT-25-C	CCT-25-A	CCT-25-CS
50	33	CCT-50-C	CCT-50-A	CCT-50-CS
Other width available upon request				

Technical Data	CCT-XX-C	CCT-XX-A	CCT-XX-CS
Supporting Base	soft cooper	soft aluminum	
Colour	original	silver	silver
Thickness without adhesive (mm)	0,035 ± 10%	0,050 ± 10%	0,035 ± 10%
Total Thickness (mm)	0,065 ± 10%	0,080 ± 10%	0,065 ± 10%
Adhesive Properties			
Type of adhesive	Acrylic, electrically conductive		
Adhesive strength (N/10 mm)	≥2	≥2	≥4
Thermal Properties			
Temperature performance (°C)	-40 to +130	-40 to +130	-40 to +130
Short term Temperature performance (°C)	180	180	180
Flammability according to IEC 60454-2	flame retardant		
Electric Properties			
Electrical resistance according to PV 1006-14 (internal, measured at ambient temperature)	≤1Ω	≤1Ω	≤1Ω
Mechanical Properties			
Tensil strength (N/10 mm)	≥30	≥30	≥30
Elongation at break in %	≥10	≥5	≥10
Liner	silicone paper		
Storage conditions	cool and dry (15 – 25°C, <65% rel. humidity)		

Electrical properties will generally stay in tact up to 80°C, however they depend on the application/type of assembly. Customer specific tests are strongly recommended.

Custom Parts



Customer demands special parts made of all foils and laminates:

- for EMC/RFI shielding of system-unit covers with (partly-)insulated metal-foils
- stamped, bounded, pre-cut for easy bending
- customer supplied foils
- with sliced paper-liner for easy removing of the liner
- on rolls or as single parts
- manufacture on customer demand
- also small quantities are possible
- with fastened wire

TRANSPARENT CONDUCTIVE FILM／WINAL



Usable for EMC measures around liquid crystal displays and as various kinds of electrodes

Feature

- Low surface electric resistance gives higher shielding effectiveness.
- Electrically conductive film with superior optical transparency.
- The work service with conductive fabric tape for grounding is available.

Material

- Base material/PET film
- Surface protection film
- Transparent conductive film

WINAL50-005

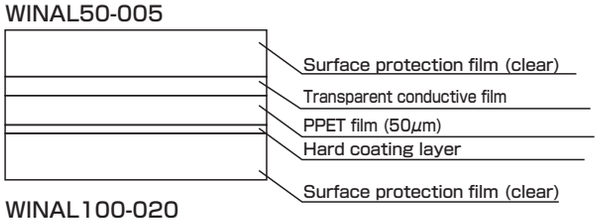

WINAL100-020

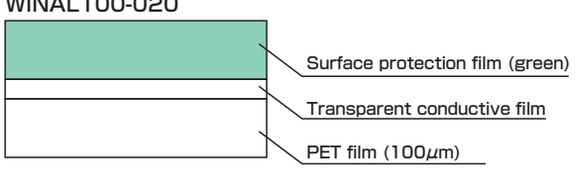

WINAL75-080

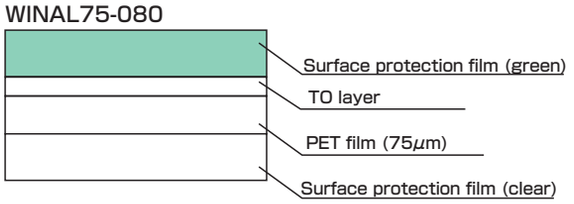

Item	WINAL50-005	WINAL100-020	WINAL75-080
(Ω/□) Surface resistance	5	20	80
(%) Total light transmittance	80	76	
(μm) Thickness	50	100	75
(℃) Surface temperature range for use	−30℃～80℃		
UL94) Flame retardancy	—	—	VTM-2 equivalent

Properties

■ Electric shielding properties (MIL-STD-285)

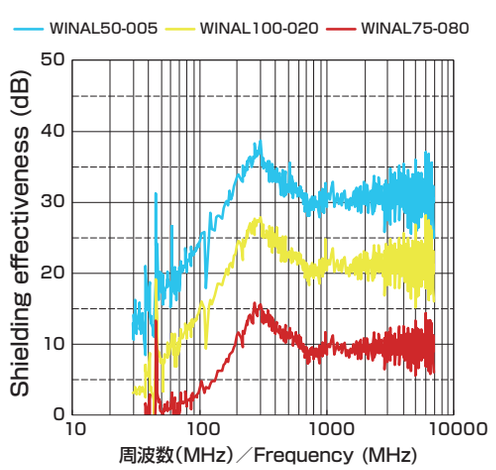

Additional process

- Attaching conductive fabric tape
- Cutting in any size
- Holepunching, etc.

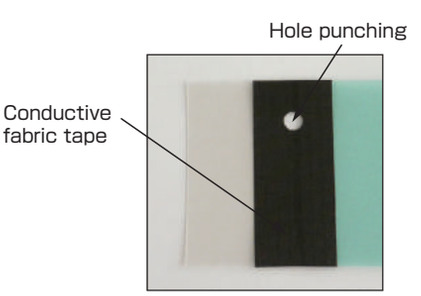

※The values are measured data for reference, not guaranteed.



Super-thin surface-conductive film

Feature

- Overall thickness 35μm (-FS,-SC)
- Provides high-shielding effectiveness and galvanic corrosion resistance.
- Safer handling compared with metal foil tapes.
- Suitable noise control for flexible cables.

Material

- Base material / PET(-FS,-FA) PPS(-SC,-AC)
- Metal membrane / SUS・Cu

REMI-FS/-SC（Surface conductive type）

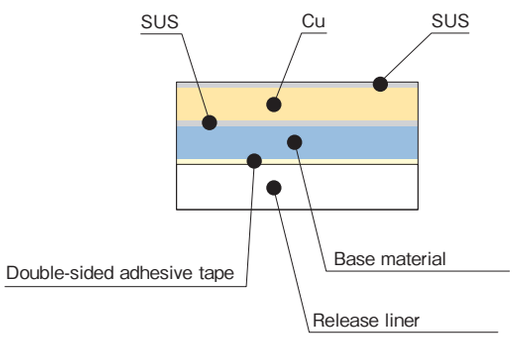

REMI-FA/-AC（Adhesive layer conductive type）

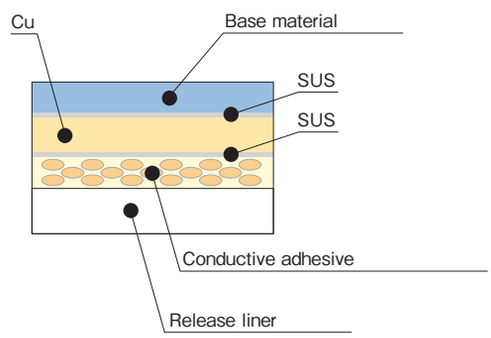

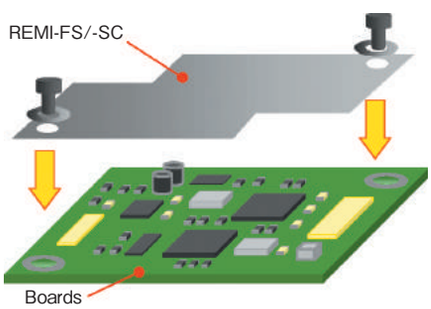

Application example) Shielding small boards using metal membrane face

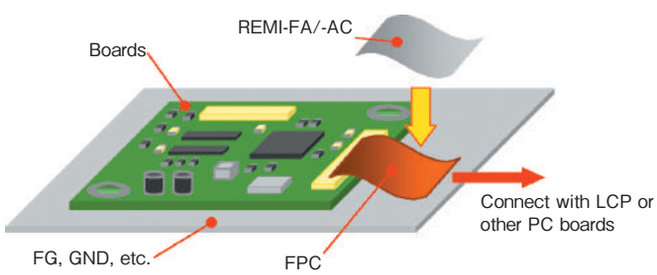

Application example) Shielding and frame-grounding for FPC

Property

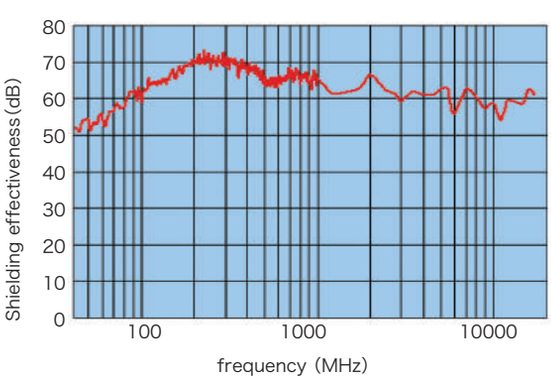

The values are measured data for reference, not guaranteed.

	REMI-FS	REMI-FA	REMI-SC	REMI-AC
Base material	PET		PPS	
Metal membrane	SUS/Cu			
Surface resistance[1] (Ω／□)	＜0.5		＜0.5	
Overall thickness (mm)	0.035	0.055	0.035	0.055
Flame retardant	—	—	UL94 VTM-0※2 Equivalent to UL94 VTM-0	UL510 FR

※ 1)Measured in film state ※ 2)Double-sided adhesive tape excluded

MEMO

CABLE SHIELDS

WIRE MESH

Metal wire braided mesh

WIRE MESH

MESH TAPES

BRAIDED SLEEVING

Monofilament Braided Sleeve

CABLE SHIELD

JACKETS

Jacket type can be assembled on wired cables.

Hook and loop fastener type

Aluminium foil

CABLE SHIELD

Conductive fabric

CABLE SHIELD

MESH TAPE／MT

Extremely fine (0.12mm) metal wires braided into a cylinder mesh provides excellent flexibility

Feature

- Flexible material can be used by wrapping around cables or inserting cables in the mesh cylinder.

Material

- SN plated copper wire

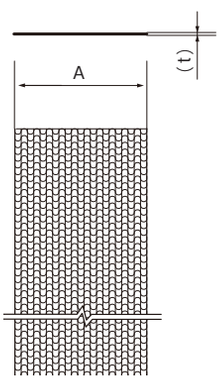



Unit: mm

Part No.	Dimensions	
	A	(t)
MT-17-CT	17	0.4
MT-25-CT	25	
MT-30-CT	30	
MT-35-CT	35	
MT-40-CT	40	
MT-55-CT	55	0.8
MT-85-CT	85	
MT-95-CT	95	
MT-120-CT	120	
MT-150-CT	150	
MT-175-CT	175	
MT-230-CT	230	

Contact us for other sizes not listed above.

Light Weight, Suitable for higher frequency range

Feature

- Wiring and I/O cables associated with an electronic device often act as an antenna or receiver that can couple EMI sources to susceptible equipment nearby. Data lines carrying broadband signals up to high frequency ranges, also need to be shielded to minimise radiated coupling.
- The MFS-AG is a highly flexible, lightweight braided sleeve made of Polyamide 6.6 with a pure silver coating that provides attenuation up to 54 dB. This braided sleeve is easy to mount, selfadjusting to convex contours and allows insertion of single wires at any place without cutting the sleeve.

Technical Characteristics

Operating temperatures:	-40°C to + 160°C (-40°F to + 320°F)
Tensile strength:	approx. 2.1 Kg per single monofilament
Number of monofilaments:	depending on the diameter of the sleeve
Diameter of single monofilament:	0.27 ± 0.03 mm (0.01" ± 0.001")
Minimum radius of the sleeve:	1 mm
Minimum surface coverage:	> 75%
Colour:	metallic
Operating diameter range:	available from 1.5 mm to 115 mm Ø
Combustibility:	not selfextinguishing as empty sleeve***
Toxicity:	all materials are free of halogen, cadmium and formaldehyde; non toxic
Surface resistivity:	< 0.5 Ω /□
Shielding effectiveness:	depending on diameter and frequency
	- up to 54 dB as tested to MIL Std 1377 (DIN 47250 T6)
	- up to 40 dB as tested to MIL Std 285
Requirements met:	flame extinguished before first measurement point reached
	VDE II B / VDE 0304, part 3 (5.70)
	UL-94: 94 V-2, UL standard 94 (for Polyamid Material)
	Airbus Industry Technical Specification
	ATS 1000.001, 4.1 and 4,2

***

In case of burning , the silver coating keeps a temperature higher than the self ignition temperature of the Polyamide 6.6 gases. Selfextinguishing cables inside the harness cool the silver down.

Shielding effect

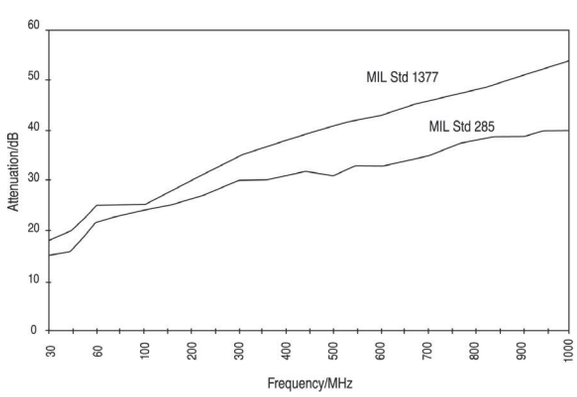

MONOFILAMENT BRAIDED SLEEVE／MFS-AG

Part.No.	Dimension	for round objects		flat width when delivered	number of filaments	length of one machine hank
		from ø	to ø			
MFS-AG-3/4	mm	1,5	4	4	48	over 600m
MFS-AG-4/5	mm	3	6	5	64	over 600m
MFS-AG-6/8	mm	5	11	9	96	over 600m
MFS-AG-10/12	mm	7	15	11	120	400-450m
MFS-AG-14/16	mm	8	18	17	160	300-340m
MFS-AG-16/26	mm	16	26	20	192	340-360m
MFS-AG-18/25	mm	18	30	28	252	300-340m
MFS-AG-30	mm	24	36	30	292	300-340m
MFS-AG-40/45	mm	32	47	45	384	300-340m
MFS-AG-50/55	mm	32	58	51	480	300-340m
MFS-AG-60/65	mm	32	68	57	600	260-270m
MFS-AG- 80	mm	32	85	61	720	210-250m
MFS-AG-100	mm	50	115	95	960	140-160m

Dimensioned sketch for round objects

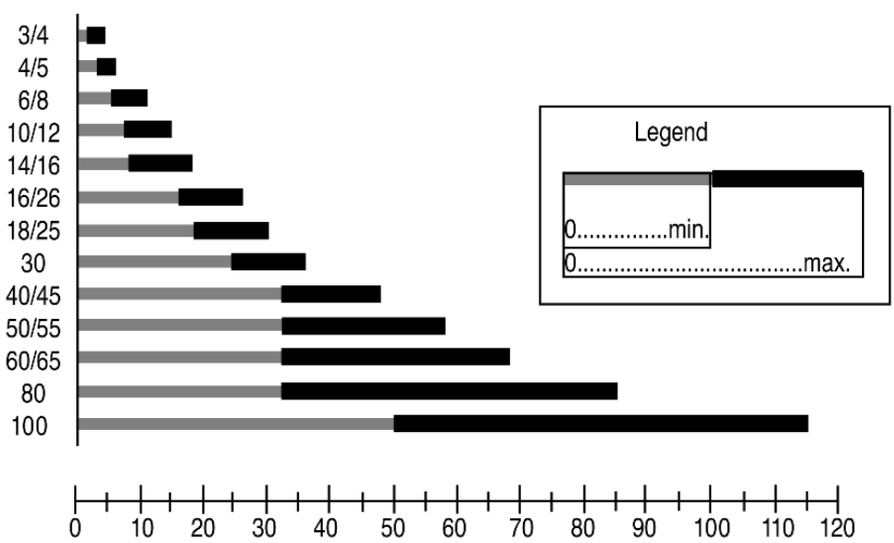

CABLE SHIELD／ECBR-AL



Hook and loop fastener allows for easy assembly

Feature

Installation on pre-wired cables or later insertion of additional cables is possible.

- Hook and loop fastener is attached on the fabric by melting so can be easily cut to the intended length without tape detachment.

Material

- Conductive layer / Aluminium foil
- Insulation layer / PET fabric based urethane
- Fastening part / Nylon
- Grounding line / Sn plated copper wire
- Enforcement tape / PET fabric based polyurethane

Standard length: 25m

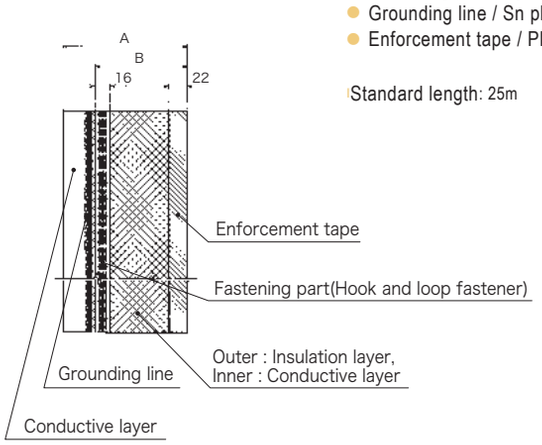

Unit: mm

Part No.	A	B
ECBR-AL-15G	83	64
ECBR-AL-20G	135	100
ECBR-AL-30G	165	130
ECBR-AL-40G	195	160
ECBR-AL-50G	240	195
ECBR-AL-70G	295	240
ECBR-AL-100G	415	350

CABLE SHIELD／ECBR-CF



Highly flexible cable shield using conductive fabric.

Feature

- Light weight and flexibility allowing winding along the cable.
- Assembly on pre-wired cables or later insertion of additional cables is possible.

Material

- Ni/Cu conductive fabric
- Insulation layer / PET fabric based urethane
- Fastening part / Nylon
- Grounding line / Sn plated copper wire

Standard length: 25m

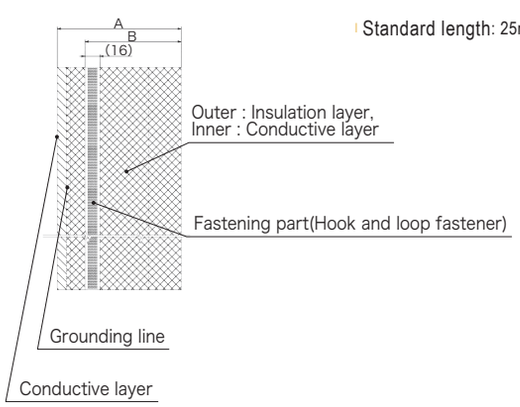

Unit: mm

Part No.	A	B
ECBR-CF-20G	134	104
ECBR-CF-30G	164	134
ECBR-CF-40G	194	164
ECBR-CF-50G	224	194

SHIELDS FOR OPENINGS

EXPANDED METALS

Expanded copper foil type for excellent shielding effectiveness

EXPANDED METALS



EXPANDED METAL



Expanded copper foil for shielding openings

Feature

- Excellent shielding effectiveness as a shielding material or gasket for openings.
- Assembly by soldering, welding, rivet or screw (with metal plate for reinforcement).

Material

- Copper

- Standard length:500×365mm(Contact us for the dimensions.)



PS-10-20-15C



PS-10-20-20C



PS-10-20-30C



PS-15-30-30C

Pattern

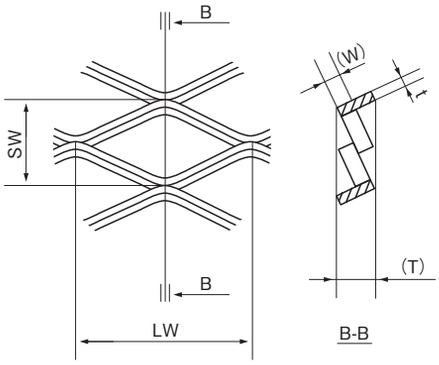

Unit：mm

Part No.	SW	LW	W	T	t (Thickness)
PS-10-20-15C	0.8	1.5	0.2	0.28	0.1
PS-10-20-20C	1.1	2.0	0.2	0.33	
PS-10-20-30C	1.6	3.0	0.2	0.36	
PS-15-30-30C	1.5	3.0	0.3	0.45	0.15

EMC

Total support to the EMC compliance design.

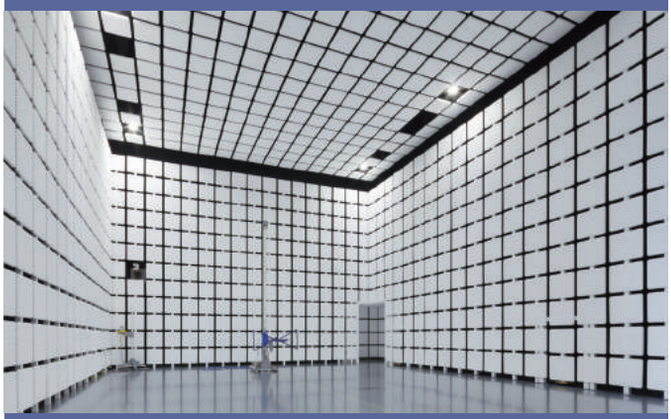

EMC Center

Measurement Standards (VCCI,FCC,EN,ECE R10)

- VCA(Vehicle Certification Agency) accredited test site.
- ISO17025 certification by European Notified body.
- iNARTE EMC engineer supports the measurement and the noise suppression.

EMI / EMS tests for Electrical sub assembly.

- Radiated/Conducted disturbance measurement for CISPR 25, ECE R10.04 Annex 7, 8
- ISO 11452-4 : 2011 Road vehicles, Component test : Harness excitation methods
- Electric Vehicle conductive charging system : Requirements for conductive connection to an a.c./d.c. supply.

Conducted disturbance measurement for telecommunications port.

- Applicable standard : CISPR 22/CISPR32/EN 55022
- VCCI Registered Telecom. ports measurement site.

Radiated disturbance measurement over 1GHz.

- Applicable standard : CISPR 22/CISPR32/EN 55022
- VCCI registered Over 1GHz radiated disturbance measurement site.

Consulting Services

- Consulting for CE marking or various international standards, and EMC design support service.

Conducted/Radiated emission measurements		
Items	Applicable standards	Measurement scope
Radiated disturbance	VCCI FCC Part15/Part18 CISPR 11,CISPR 22,CISPR 32 EN 55011,EN 55022 EN 61000-6-3,EN 61000-6-4 EN 60601-1-2,EN 61326-1 (Electrical Appliance and Material Safety Law)	10m Semi-anechoic chamber 3m Semi-anechoic chamber 30MHz～18GHz
Conducted disturbance at mains port	ditto CISPR14-1 , (CISPR 25)	9kHz～30MHz、 (150kHz～108MHz)
Conducted disturbance at communication port	VCCI CISPR 22 , CISPR 32 EN 55022	ISN：2W,4W,8W Current probe
Power line harmonics	EN 61000-3-2 JIS C 61000-3-2	To 40th harmonics (50Hz/60Hz Single-phase supply only)
Voltage changes, voltage fluctuations and fliker	EN 61000-3-3	(50Hz/60Hz Single-phase supply only)
Disturbance power	CISPR 14-1 (Electrical Appliance and Material Safety Law)	30MHz～300MHz
Radiated emission / conduction disturbance voltage of electronic control units on vehicle.	2004/104/EC ECE R10 CISPR 25	Available for Annex VII, VIII ※Testing standards for vehicle manufacturers, please contact the EMC Center.

Immunity tests		
Items	Applicable standards	Test scope
Electrostatic discharge	IEC 61000-4-2 JIS C 61000-4-2	(Air)：200V～16kV (Contact)：200V～9kV
Radiated, RF electromagnetic field	IEC 61000-4-3 JIS C 610004-3	80MHz～3GHz, 3～10V/m AM 1kHz 80%
Electrical fast transient/burst	IEC 61000-4-4 JIS C 61000-4-4	200V～4.4kV (5ns/50ns) (Repetition rate):5kHz or 100kHz
Surge	IEC 61000-4-5 JIS C 61000-4-5	200V～4.4kV (1.2μV/50μV) (Only for power line)
Conducted disturbances, induced by RF fields	IEC 61000-4-6 JIS C 61000-4-6	150kHz～80MHz, 0.1～10Vrms AM 1kHz 80%
Power-frequency magnetic field	IEC 61000-4-8 JIS C 61000-4-8	0.1～40A/m (50Hz/60Hz)
Puls magnetic field	IEC 61000-4-9	100～2000A/m (8μs/20μs)
Voltage dips, short interruptions and voltage variations	IEC 61000-4-11	(Maximum power：Single-phase 3kVA)
Audible noise measurements (TTE&ITE)	CISPR 24	Annex A Automated measurements of audible noise
Harness excitation methods	ISO 11452-4	BCI 1MHz～1GHz (200mA max.) TWC 400MHz～3GHz(33dBm～26dBm)

Special test		
Items	Applicable standards	Test scope
Shield effectiveness	MIL-STD-285 NDS C 0012	(Sample size) 910mm×910mm (Max.) (Frequency range) 30MHz～4GHz

Access

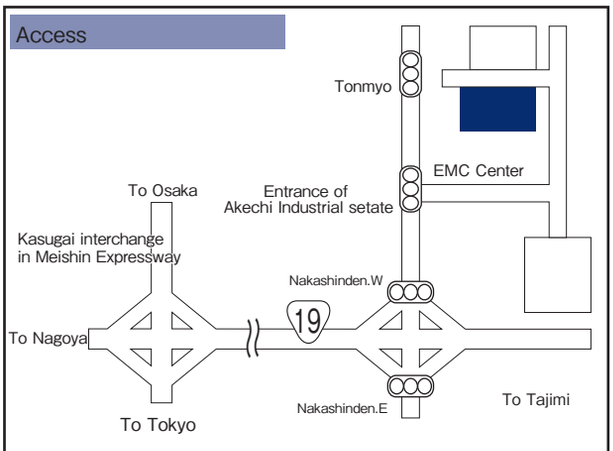

Access by car

19 Direction of Tajimi

Kasugai interchange in Meishin Expressway → (5.0km) → Nakashinden.w (Left turn) ↓ (1km) → EMC Center

Access by JR (Public transport)

About 15 minutes from Kozoji Station of Chuou Line by taxi.

1423-101, Aza-Tonmyo, Akechi-cho, Kasugai, Aichi 480-0303

Tel.0568-88-7999 Fax.0568-93-0686

Part Name／Part No. INDEX

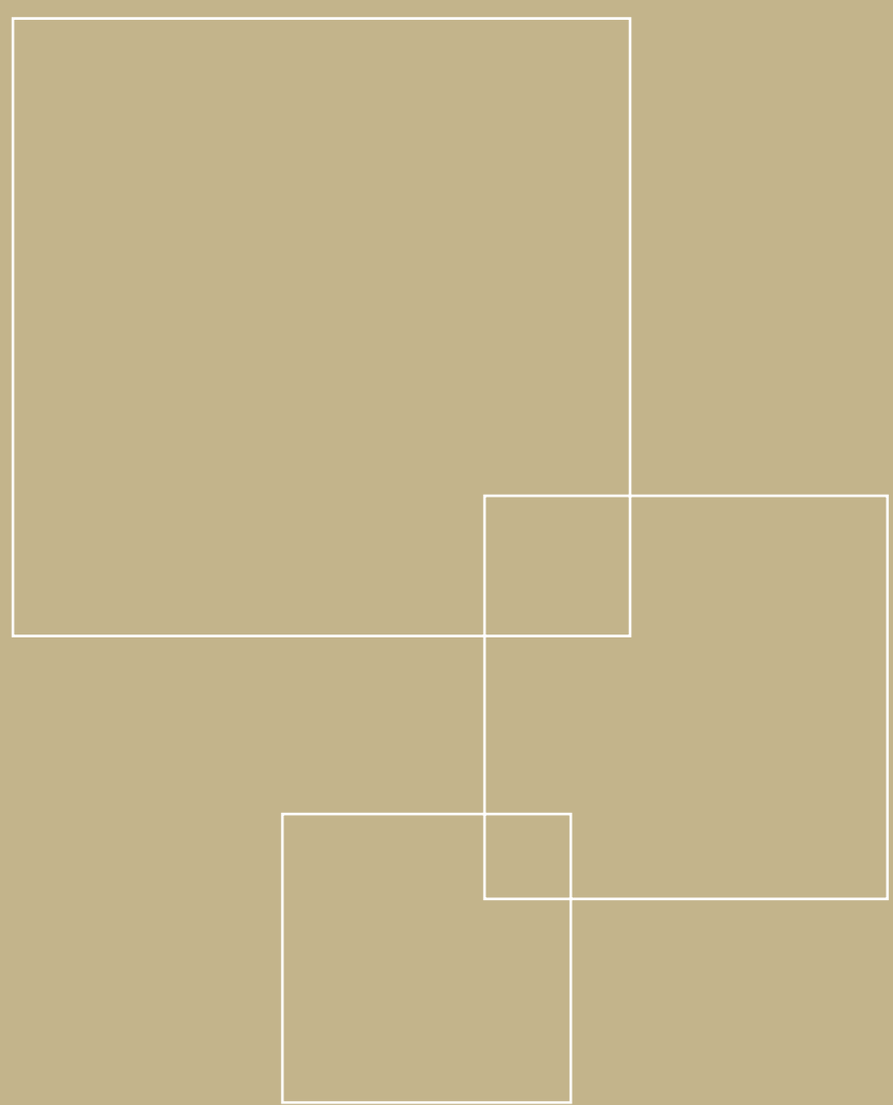

GENERAL TERMS OF DELIVERY AND PAYMENT

1. Scope

1.1 The following General Terms of Delivery and Payment shall be applicable – provided nothing to the contrary is stipulated in writing – to all of the deliveries and other performance effected by us.

1.2 Deviating General Terms of Business of the Purchaser shall not bind us.

1.3 Amendments and/or supplements to the following terms and to the additionally stipulated agreements upon the conclusion of the contract must be made in writing.

2. Conclusion of the Contract

2.1 The offers of Kitagawa GmbH are made without obligation.

2.2 A contract between Kitagawa GmbH and the Purchaser shall only come into effect in accordance with the contents of the written confirmation of order on the part of Kitagawa GmbH or through the delivery of the goods or the rendering of the agreed performance by Kitagawa GmbH.

2.3 The Purchaser shall be bound to its order for three weeks. Kitagawa GmbH reserves the right to deviate from the order specifications in the acceptance of the order if this is necessary for the fulfillment of the order and is acceptable for the Purchaser.

2.4. Kitagawa GmbH shall be entitled to effect an alteration to the goods at any time without prior notification insofar as this does not result in any shortfall of the contractually stipulated characteristics of the goods and the alteration is reasonable for the Purchaser. The alteration of already delivered contract cannot be subsequently demanded.

3. Delivery Terms

3.1 The delivery period of the goods shall be determined in accordance with the written confirmation of order of Kitagawa GmbH.

3.2 Indicated delivery periods shall run from the dispatch of the written confirmation or order. If the Purchaser is obliged to effect advance performance, then the delivery period shall commence with the receipt of the contractual advance performance of the Purchaser at Kitagawa GmbH.

3.3 If the Purchaser demands alterations to the contractually stipulated performance after a written confirmation of order has been effected, then Kitagawa GmbH shall be entitled to effect a reasonable extension to the delivery period if necessary.

3.4 In cases of force majeure. interventions by sovereign powers, natural disasters, war, revolts, strikes at its own company, at supply companies or at carriers, Kitagawa GmbH shall be entitled to
make up the delivery after the cessation of the cause of the impediment and the delivery period shall be extended accordingly. The same applies if Kitagawa GmbH does not receive its own supplies in due time or in due form. There shall be no claims due to non-delivery or late delivery. This shall also be applicable if above indicated circumstances arise once the stipulated delivery period was already exceeded.

3.5 If a promised delivery date is not met by Kitagawa GmbH for reasons attributable to Kitagawa GmbH's fault,, then the Purchaser shall be entitled to set Kitagawa GmbH a two-week subsequent period after the expiry of the stipulated delivery period by means of registered letter. The Purchaser shall be entitled to withdraw from the agreement after the fruitless expiry of the period. Claims for damages, insofar as is legally permissible, as well as more extensive rights shall be excluded, provided the delay in delivery is neither due to intent nor gross negligence on the part of Kitagawa GmbH. This limitation of claims shall not apply in cases due to loss of life, bodily injury or damage of health. The burden of proof that intent or gross negligence is not applicable shall be borne by Kitagawa GmbH.

3.6 Kitagawa GmbH shall be entitled to effect part deliveries unless they should be unreasonable to be accepted by the Purchaser.

4. Shipment and passing of risk

4.1 Kitagawa GmbH shall undertake the shipments of the goods at the Purchaser's expense. Kitagawa GmbH shall select the forwarder/carrier to the best of its knowledge, without, however, assuming corresponding liability. Kitagawa GmbH shall award the shipping order on the customary terms in the sector in each case. Transport insurance shall only be taken out at the Purchaser's request and expense.

4.2 Risk shall pass when the goods leave the warehouse or upon the surrender of the goods to the forwarder/carrier.
The risk shall also pass to the Purchaser, if the goods are ready for shipment and delivery is delayed or fails for other reasons attributable to the Purchaser.

4.3 Any transport damage which occurs must be asserted by the Purchaser in due time to the forwarder/carrier or its insurance company.

5. Prices

The prices are indicated in the respective confirmation of order or Kitagawa GmbH and are expressed net in EURO plus the statutory rate of V.A.T. exclusive of packing, freight, postage, delivery charges etc.

6. Payment Terms

6.1 Insofar as no other payment terms are indicated in the confirmation of order of Kitagawa GmbH, the invoices are payable after the invoice date within 30 days net without any discount. Decisive for effecting payment on time is the receipt of the payment at Kitagawa GmbH. Cheques shall only be accepted on account of performance.

6.2 If the Purchaser is a businessman, then it shall be in default upon the exceeding of the due date without a separate warning. Kitagawa GmbH shall be entitled to assert default interest to the amount of 8 percentage points above the basic rate of interest.. The assertion of a more extensive loss caused by default remains reserved.

6.3 In the event that the Purchaser should be in default with payment, Kitagawa GmbH may upon its discretion request advance payment before

delivery of the goods. The same shall apply if the Purchaser's economic conditions give reason to concern regarding the due fulfillment of payment obligations.

6.4 The Purchaser shall only be entitled to set off the claims of Kitagawa GmbH against those claims which are undisputed or legally binding.

7. Warranty

7.1 Kitagawa warrants for the duration of 12 months that the goods contained not material or fabrication defects at the time the risks passes. This warranty ("Gewährleistung") commences upon delivery of the goods.

7.2 Warranty shall not be effected in the case of improper utilization, faulty installation, incorrect operation etc. No warranty shall similarly be effected for losses which arise through the operation of the goods together with such appliances whose compatibility has not been expressly confirmed in writing by Kitagawa GmbH.

7.3 The Purchaser shall notify Kitagawa GmbH of any defects of the delivery in writing as soon as such defects are detected under conditions of normal business operations. Section 377 German Trade Code applies.

7.4 In the case of defects the warranty shall be effected at the option of Kitagawa GmbH by subsequent rectification or substitute delivery free of charge. If the subsequent rectification also fails on the second attempt or in if the second substitute delivery also contains defects or if Kitagawa GmbH does not meet its subsequent delivery or substitute delivery obligation within a reasonable period, then the Purchaser shall be entitled to a reduction of the purchase price or rescission of the contract.

7.5 Claims for damages caused by defects shall be excluded. This exclusion shall not apply in case a defect has been fraudulently concealed, in the event that life, body or health is injured and acts of Kitagawa GmbH with intention or gross negligence. In the case a guaranteed characteristic of the goods should be lacking, liability shall be restricted to the loss which is to be expected in accordance with the customary course of events. More extensive claims on account of the faulty nature of the goods shall be excluded. This shall also be applicable to the reparation of consequential losses and to the violation of ancillary contractual obligations.

7.6 The afore mentioned exclusion of liability shall also be applicable to claims in tort and in connection with the initiation, conclusion and processing of a contract, not, however, in the case of claims in accordance with the Product Liability Act.

8. Retention of Title

8.1 Kitagawa GmbH shall retain title to all goods until the payment in full of all receivables resulting from the business relations with Kitagawa GmbH. If the value of the collateral which is in existence in favour of Kitagawa GmbH should exceed the claims against the contract partner by more than 10 per cent in total, then Kitagawa GmbH shall be obliged to release collateral at the request of the Purchaser

8.2 The Purchaser shall be entitled to resell the goods subject to retention of title in customary business transactions. The Purchaser shall not, however, be entitled to pledge the goods subject to retention of title or to assign all claims to which it is entitled from a future sale of the goods subject to retention of title against its purchasers to Kitagawa GmbH by way of security.

8.3 In the case of the processing or reconstruction of the goods subject to retention of title by the Purchaser, this shall always be effected for Kitagawa GmbH. If the goods subject to retention of title are processed with other articles which do not belong to Kitagawa GmbH, then Kitagawa shall acquire co-ownership to the new article in proportion to the value of the goods subject to retention of title to the other processed articles at the time of processing. If the Purchaser sells the goods subject to retention of title together with other goods which do not belong to Kitagawa GmbH, or after joining or processing, then the assignment shall only be effected to the amount of the outstanding invoices sum of the respective goods subject to retention of title.

8.4 The Purchaser shall be entitled to collect the assigned receivable in its own name. Kitagawa GmbH shall, however, be entitled to revoke this collection authority at any time, especially in the case of default in payment by the Purchaser. In the case of revocation the Purchaser shall be obliged to provide Kitagawa GmbH with or to surrender to it all necessary information and documentation for the assertion of the assigned receivables and to disclose the assignments to its purchasers. In the case of default in payment by the Purchaser Kitagawa GmbH shall be entitled to notify its purchasers of the assignment.

8.5 The Purchaser shall be obliged to provide Kitagawa GmbH with information at any time on the where-abouts of the goods subject to retention of title and on the receivables arising from their resale. The Purchaser shall be obliged to inform Kitagawa GmbH in writing of a seizure by a third party of the goods subject to retention of title or of the receivables assigned to Kitagawa GmbH and it shall be obliged to draw the third party's attention to the rights of Kitagawa GmbH. The Purchaser shall furthermore be obliged to support Kitagawa GmbH upon the assertion and enforcement of its rights against this third party, especially at its expense to lodge the necessary immediate remedies/appeals in order to safeguard the rights of Kitagawa GmbH.

8.6 In case of default in payment on the part of the Purchaser Kitagawa GmbH shall be entitled to take back the goods subject to retention of title. The Purchaser shall accordingly be obliged to surrender these goods. The taking back of the goods subject to retention of title does not constitute a withdrawal from the contract, unless Kitagawa GmbH expressly states such a withdrawal in writing.

8.7 The Purchaser shall be obliged to treat the delivered goods subject to retention of title with care. It shall especially be obliged to take out adequate insurance cover for the goods subject to retention of title at its own expense against loss or damage through fire, water, burglary or theft. The Purchaser hereby assigns its corresponding insurance claim to Kitagawa GmbH. Kitagawa GmbH hereby accepts this assignment and states the reassignment to the Purchaser with the proviso that this shall become effective if and as soon as the retention of title has expired.

9. Final Provisions

9.1 The Purchaser shall not be entitled to assign rights and obligations to third parties arising from the contract concluded with Kitagawa GmbH without the prior approval of Kitagawa GmbH.

9.2 The contractual relations between the contracting parties shall be subject to the Law of the Federal Republic of Germany. The provisions of the Convention on Contracts of the International Sale of Goods (CISG, Vienna Convention) shall not apply to the contract concluded with the Purchaser.

9.3 Venue for all disputes and types of proceedings arising from or in connection with the contractual relations between the parties shall be Darmstadt, Federal Republic of Germany, provided the Purchaser is a businessman.

9.4 Kitagawa GmbH shall be entitled to store and to use the personal data to which it has obtained access from the business relations with the Purchaser under the terms of the German Data Protection Act for its own business purposes.

9.5 If a provision of these General Terms of Business or of the contract concluded with the Purchaser should be or become ineffective, then this shall not affect the effectiveness of the remaining provisions of these General Terms of Business or of the concluded contract.

KITAGAWA GmbH
Birkenwaldstraße 38
D-63179 Obertshausen
Germany
Telefon +49-6104-60009-0
Telefax +49-6104-60009-40

Notice:

The specifications provided in this catalogue are believed to be accurate and reliable. Kitagawa GmbH reserves the right to make changes to specifications to improve manufacturing process performance and reliability.

This catalogue is intended for representation only and is not to form any part of any order. Engineering specifications are available upon request.

Any information/specification supplied by Kitagawa GmbH is based upon Kitagawa Industries laboratory test data and is believed to the reliable. It is recommended that our products are tested by the customer to ensure suitability for the intended application.

If any Kitagawa product is to be used in a life threatening application (such areas as Medical Automotive and Aerospace etc) the application must be discussed with Kitagawa GmbH and its written approval must be obtained.

Stand: Nov.2010

GLOBAL LOCATION

KITAGAWA INDUSTRIES CO.,LTD.
695-1, Higashiorido, Mukui-cho, Inazawa City,
Aichi Prefecture 492-8446, Japan
Tel: 81-587-34-3561 Fax: 81-587-34-3109
http://www.kitagawa-ind.com

KITAGAWA INDUSTRIES America, Inc.
2325 Paragon Drive, Suite 10 San Jose,
California 95131-1309 U.S.A.
Tel: 1-408-971-2055 Fax: 1-408-971-6033
http://www.kgs-ind.com

SHANGHAI KITAGAWA INDUSTRIES CO.,LTD.
3rd Floor, West No.8 Bldg., 308, Fen Ju Road,
Waigaoqiao Free Trade Zone, Shanghai 200131,
China
Tel: 86-21-5865-2766 Fax: 86-21-5064-4018

KITAGAWA TECHNOLOGY(SHENZHEN)CO.,LTD.
Unit G 24F, Times Fortune Building, No.88 FuHua Road 3,
FuTian District, Shenzhen City 518026, China
Tel: 86-0755-2396-3200 Fax: 86-0755-2396-3490

KITAGAWA ELECTRONICS(THAILAND)CO.,LTD.
＜Head office &Plant (IEAT Free zone)＞
Hi-Tech Industrial Estate (IEAT FREE ZONE):
126 Moo1, Bhan Lain, Bang Pa-in, Phra Nakorn,
Sri Ayutthaya 13160, Thailand
Tel: 66-35-350-201 Fax: 66-35-350-204
＜Sales office & Warehouse(BOI IPO)＞
Bangkok Free Trade Zone(BFTZ), 88/78 Moo15, Bangsaothong,
Bangsaothong, Samutprakarn10540,Thailand
Tel: 66-2-182-5264 Fax: 66-2-182-5268

KITAGAWA ELECTRONICS(SINGAPORE)PTE.LTD.
2 Bukit Batok Street 23, #04-03
Singapore 659554
Tel: 65-6560-6511 Fax: 65-6560-6211
http://www.kitagawa.com.sg

KITAGAWA INDUSTRIES (H.K.) LIMITED
Unit J, 15th Floor, Ever Gain Centre, 43-57 Wang Wo
Tsai Street, Tsuen Wan, New Territory, Hong Kong
Tel: 852-2612-1161 Fax: 852-2612-1686

KITAGAWA INDUSTRIES(TAIWAN)CO.,LTD.
7F., No. 75, Hsin Tai Wu Rd., Sec. 1,
Hsi Chih Taipei Hsien, Taiwan 221
Tel: 886-2-2698-8833 Fax: 886-2-2698-3355
http://www.kgtw.com.tw

KITAGAWA GmbH

Birkenwaldstraße 38 63179 Obertshausen Germany
Phone: +49 6104 60009-0 Fax: + 49 6104 60009-40
E-Mail: sales@kitagawa.de

http://www.kitagawa.de

JULY2017 Printed No.20170710