

Releasable snap-mount spacer clamp

Features

- Easy fastening/releasing of cables. Box-structured lock prevents side slippage at fastening.



Snap Mounting




Round hole

Material


- Nylon 66 (Color : Natural)

UL94 V-2

FCS

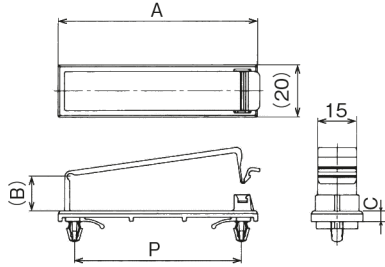

FCSS

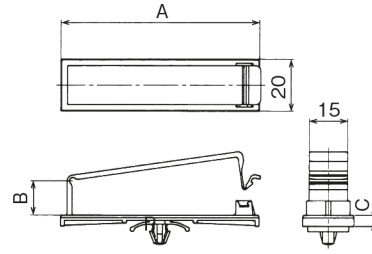

Part No.	Applicable cable		A	(B)	C	Mounting hole pitch	Mounting hole size	Panel thickness	Std. Package
	Max. width	Max. thickness							
FCS-3010	31.0	6.5	45.5	7.0	4.0	33.0±0.1	φ4.8 <sup>+0.2</sup> <sub>0</sub>	0.5~2.3	100 pcs.
FCS-3015		13.0		13.4					
FCS-6010	63.0	6.5	77.0	7.0	4.0	64.5±0.1	φ4.8 <sup>+0.2</sup> <sub>0</sub>	0.5~2.3	100 pcs.
FCS-6015		13.0		13.4					
FCSS-6010		6.5		7.0	4.2	—	φ6.4 <sup>+0.2</sup> <sub>0</sub>		
FCSS-6015		13.0		13.4					

UL 1565 recognized product

(Unit : mm)