

Anti-vibration cooling fan fixture that prevents shear movement of the fan and reduces noise


- New rubber and plastic design absorbs vibration from vertical mounted fans, thereby reducing noise
- Snap-mount allows for easy workability
- Operating temperature: -20 ~ 70°C

Specifications

Unit : mm

Part No.	A	B	C	(D)	Panel thickness	Mounting hole dia.	Color
FF-25FS-43-95T	Φ8	4.0	25.0	38.5	t0.8~1.2	Φ4.3±0.1	Black

Material : ①PP (Snap portion and support portion) ②TPS (flexible portion) (KG-GEL / YMG-95T)

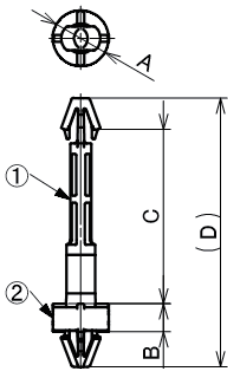

Recommended fan specifications



Part No.	Thickness (mm)	Fan hole diameter (mm)	Weight(g)
FF-25FS-43-95T	t25 ^{+0.3} / _{-0.5}	Φ4.3 ^{+0.2} / _{-0.1}	~240※1

※1 Support point number : Four point mounting

Properties


■ Example for vibration suppression of vibration and acoustic noise

Testing condition : Vibration and noise is measured by attached fan (□60mm, t=25mm) on metal panel (t=1mm)

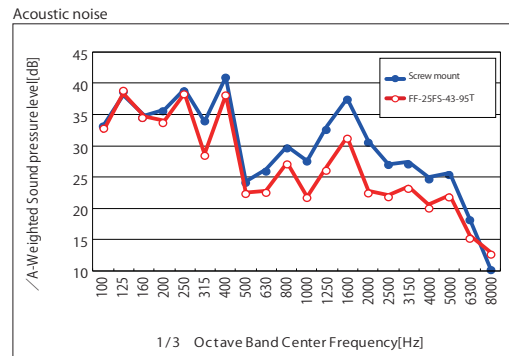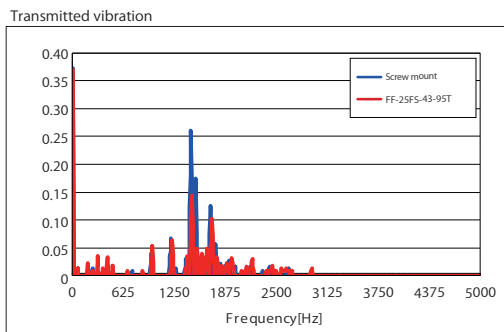

Structure

<FF-25FS-43-95T>

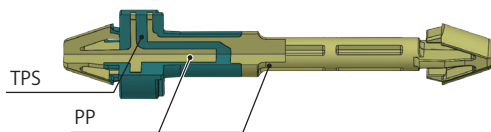

<EXISTING PRODUCT>

