


High performance ferrite sheet achieves excellent noise suppression simply by affixing it to desired areas.

Feature

- Excellent noise suppression in low frequency range compared to metal filler electromagnetic noise suppression sheet.
- Heat resistant tape allows application for areas where temperature can be elevated.
- Excellent insulation property due to its sintered body.

Material

- PET with adhesive layer
- Ferrite sheet
- Double-sided adhesive tape

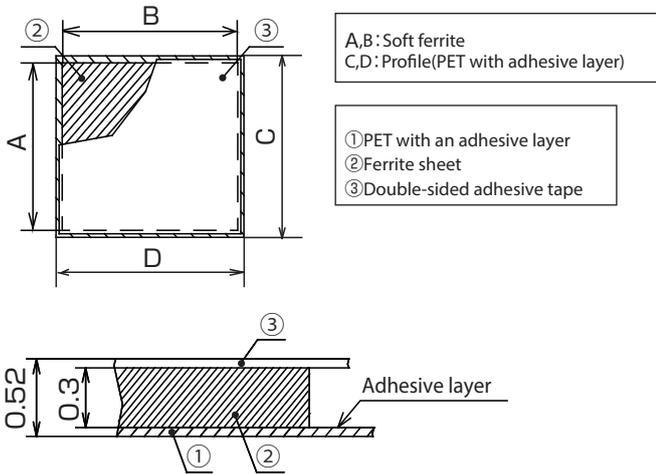


Dimensions

Unit : mm

Part No.	A	B	C	D
FFS-0.3-1010T	10	10	11.5	11.5
FFS-0.3-1020T		20		21.5
FFS-0.3-1515T	15	15	16.5	16.5
FFS-0.3-2020T	20	20	21.5	21.5
FFS-0.3-2030T		30		31.5
FFS-0.3-2525T	25	25	26.5	26.5
FFS-0.3-3030T	30	30	31.5	31.5
FFS-0.3-5050T	50	50	55	55


※ Custom designs available.
Please contact our sales representative for further information.

Properties

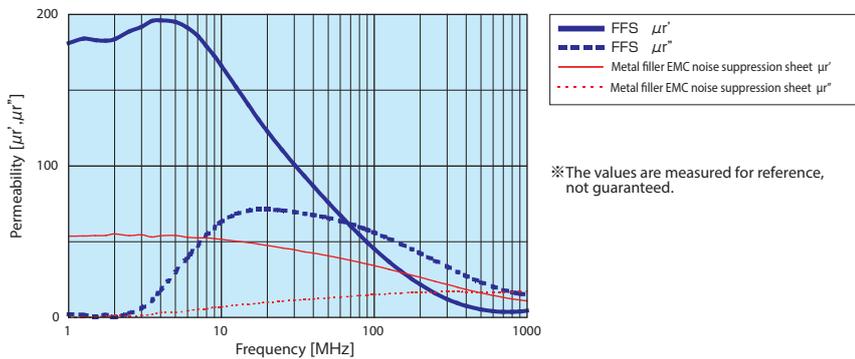


Application

- EMC suppression for IC

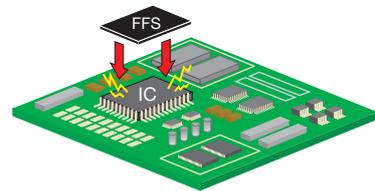

Mounting FFS onto IC device

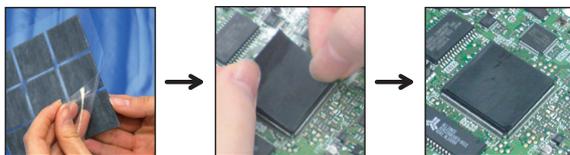

Gently bend the liner while take the ferrite sheet off.

※ It is not advisable to reuse the product once it is removed.