




Metal mesh employed EMC grounding material

Feature

- Excellent flexible structure comprises metal wires braided into a cylinder mesh, coated with insulator.
- Large surface area of conductive mesh provides excellent impedance characteristics in the high frequency range.

Material

- Mesh / Tinned copper wire
- Terminal / Round terminal
- Coating / Heat shrink tube (black)

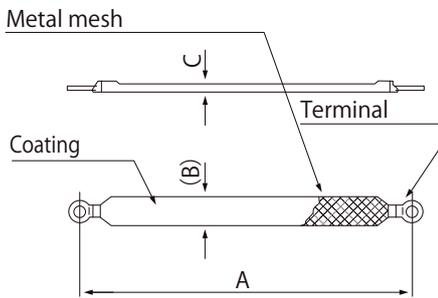

※Please contact our sales department for sizes outside of those specified.

■ M3 screw assembly type

Unit:mm

Part No.	A	(B)	C
FGM-50-M3	50	8.5	2.5
FGM-100-M3	100		
FGM-150-M3	150		
FGM-200-M3	200		

■ M4 screw assembly type

Unit:mm

Part No.	A	(B)	C
FGM-50-M4	50	8.5	2.5
FGM-100-M4	100		
FGM-150-M4	150		
FGM-200-M4	200		
FGM-265-M4	265		
FGM-300-M4	300		
FGM-400-M4	400		