




Non-split sleeve cores

Material


- Soft ferrite

Unit : mm



Part No.	ϕA	ϕB	C	Impedance* $\Omega/100\text{MHz}$ (1turn)
GRI-3-4-1	3	1	4	≥ 25
GRI-3.5-3.5-1.2	3.5	1.2	3.5	≥ 25
GRI-3.5-7-1.2	3.5	1.2	7	≥ 40
GRI-4-5-1.5	4	1.5	5	≥ 30
GRI-11-18-5	11	5	18.5	≥ 85
GRI-11-20-5	11	5	20	≥ 90
GRI-11-25-5	11	5	25	≥ 105
GRI-12-16-8.5	12	8.5	16	≥ 35
GRI-12.3-20-7	12.3	7	20	≥ 70
GRI-14-28-6	14.3	6.3	28.6	≥ 130
GRI-16-20-7	16	7	20	≥ 95
GRI-16-28-7	16	7	28	≥ 130
GRI-16-28-8	16	8	28	≥ 115
GRI-16-28-9	16	9	28	≥ 95
GRI-17.5-28.5-10.7	17.5	10.7	28.5	≥ 85
GRI-18-28-10	18	10	28	≥ 100
GRI-26-28-13	26	13	28	≥ 120

Impedance vs frequency

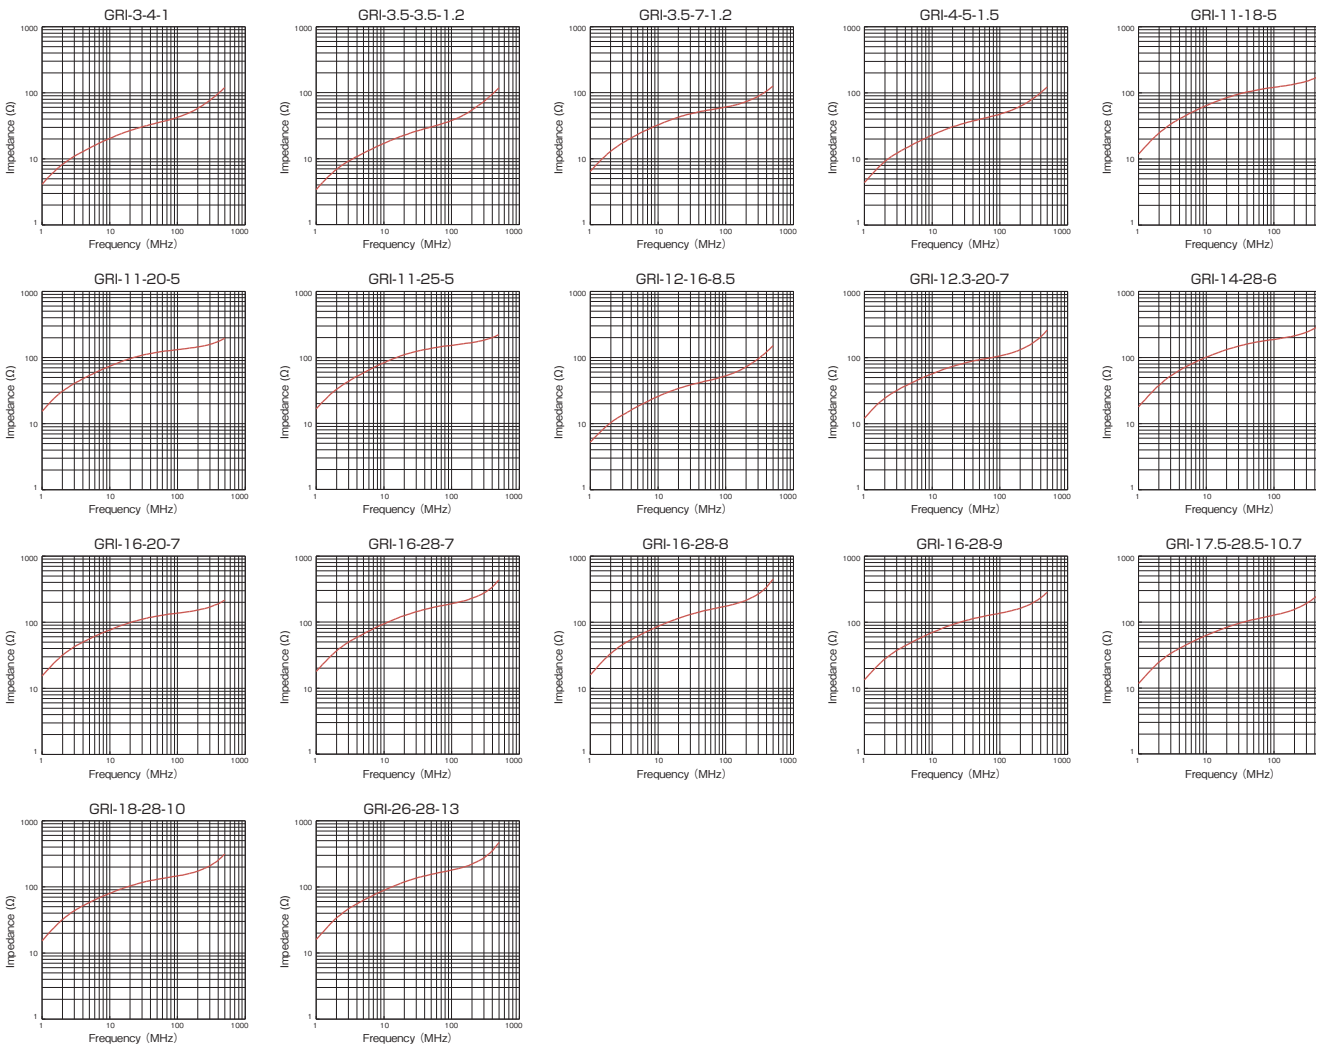

FERRITE CORE PRODUCTS

High-frequency cores

Split ferrite clamp

Non split type

*The values are measured data for reference, not guaranteed.