



Ferrite core applicable to discrete device without adhesive

Feature



- Because temporary fasten is available, it is much easy installation of discrete device with the product onto PC board.
- Fastening with no adhesive can be reduced conventional adhesive dispensing process.
- Ringing suppression is available from FET or diode.

Material


- Soft ferrite
- Silicone rubber

Unit:mm


Part No.	Profile	Height	Cylindrical Lead Outer Diameter	Rectangular Leadcross-sectional dimension
GRIP-3.5-1.8-2	φ4.4	2.8	φ0.6~1.6	0.8~1.5(Width)/0.3~0.7(Thickness)



Impedance vs frequency

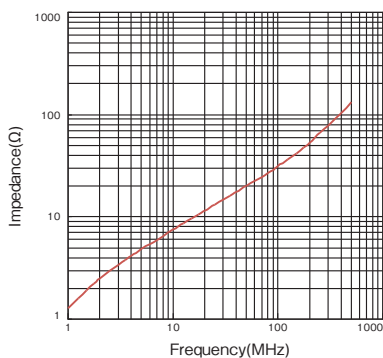

Ferrite core

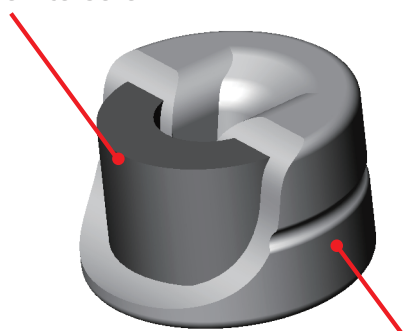

Silicone rubber

Application

