



Toroidal cores with easily mounting fixture on chassis

Feature


- GTFCK series, which are provided with mounting fixtures, can be assembled on chassis by using a screw.

Material

- Ferrite Core : Soft ferrite
- Housing : PA66 (Color : Light gray / Flammability : UL94V-0)

Unit : mm

Part No.	Profile	Applicable cable diameter	A	B	C	Impedance Ω/100MHz (1turn)
GTFCK-16-8-13	①	Max. φ 7.2	32.5	20.4	18.9	≧ 45
GTFCK-16-8-16	①	Max. φ 7.2	32.5	20.4	21.9	≧ 55
GTFCK-20-10-10	①	Max. φ 8.5	37.1	24.9	16	≧ 40
GTFCK-23-11-14	①	Max. φ 10.5	40.5	28.3	20.2	≧ 55
GTFCK-25-15-12	①	Max. φ 13	41.2	28.9	17.8	≧ 40
GTFCK-28-16-13	①	Max. φ 14.7	45.3	32.9	18.8	≧ 50
GTFCK-28-16-20	①	Max. φ 14.7	45.3	32.9	25.8	≧ 70
GTFCK-41-27-16	②	Max. φ 26	51.8	44.5	19.6	≧ 50

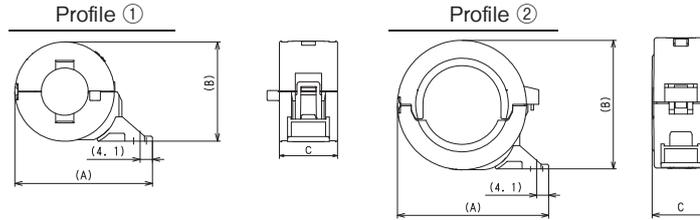

※The values are measured data for reference, not guaranteed.