






Oval style enables space-saving compared with toroidal type

Feature

- With cable either single or multiple turns, the over-all profile is lower than toroidal cores (refer to Fig. below).
- Oval shape allows assembly on connected cables with rectangular connectors, etc.

Material

- Soft ferrite

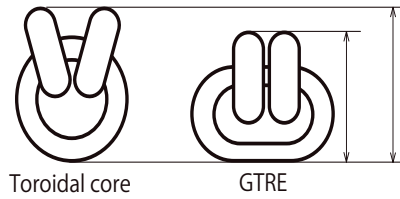



Unit:mm

Part No.	A	B	C	D	E	Impedance* Ω /100MHz (1 turn)
GTRE-14-12.5-8	14.0	8.0	10.0	4.0	12.5	\cong 30
GTRE-14-14-8					14.0	\cong 35

※Contact us for the measurement conditions.

Impedance vs frequency

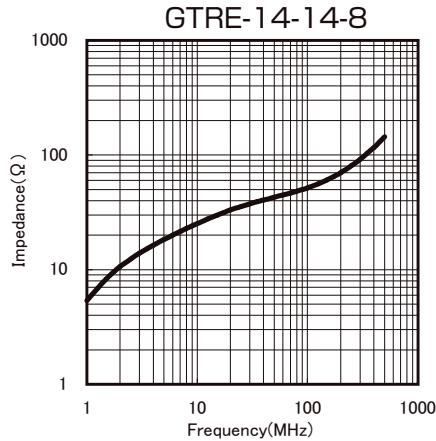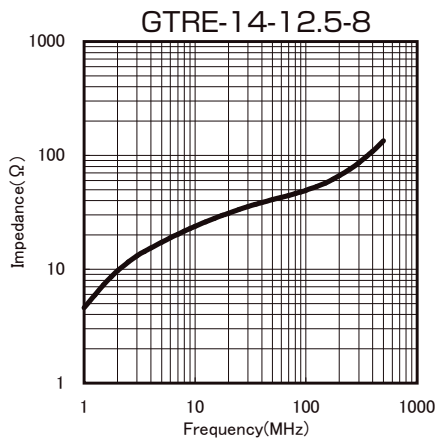

※The values are measured data for reference, not guaranteed.