


Suitable for contact in large clearance applications

Feature

- Special profile allows the contact clearance to vary from 10 to 20 mm.
- No change in spring length when compressed results in space saving.
- Assembled by screw or double-sided adhesive tape.

Material

- Stainless steel (SUS304 / t=0.15mm)

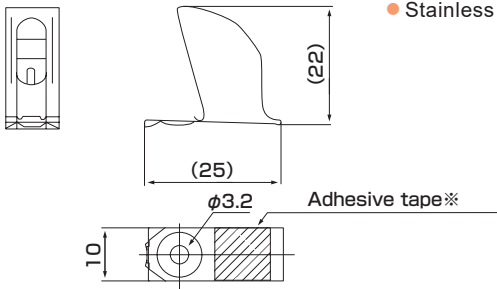

※ HPC-10-20T only

Unit:mm

Part No.	Specification
HPC-10-20T	Double-sided adhesive tape attached
HPC-10-20	Double-sided adhesive tape un-attached