



Dome-head, snap-mount spacer

Features


- Dome head snap mounted from underside of chassis, seals the hole from dust intrusion.

Material


- Nylon 66 (Color : Natural)

UL94 V-2 (V-0*)



※ For V0 type, "V0" is added to the end of the part No.
(With regard to lot size and lead time, please contact us.)

 Snap Mounting
(Dome head with low protrusion)

 Round hole

 Can be used with KGPS-RF series
Supports heavily loaded PC boards at the middle of PCB

▶ P10

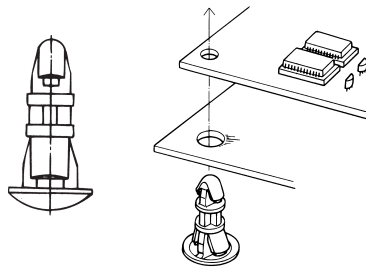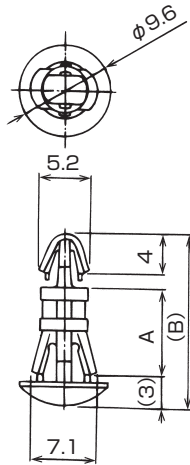

Part No.	A	(B)	Mounting hole size	Panel thickness	Std. Package
KGLS-5RT	5	13.8	Top $\phi 4^{+0.2}_0$	Top 1.6±0.15	100 pcs.
KGLS-6RT	6	14.8			
KGLS-7RT V0	7	15.8			
KGLS-8RT	8	16.8			
KGLS-10RT	10	18.8	Bottom $\phi 5.5^{+0.2}_0$	Bottom 1~1.75	100 pcs.
KGLS-12RT	12	20.8			
KGLS-14RT	14	22.8			
KGLS-16RT	16	24.8			
KGLS-18RT	18	26.8			
KGLS-20RT V0	20	28.7			
KGLS-22RT	22	30.7	500 pcs.		
KGLS-24RT	24	32.8			

(Unit : mm)