




Non-split toroidal core for intermediate frequency range from 3 to 50MHz.

Feature

- Effective for suppression both of conducted noise upto 30MHz and radiated noise over 30MHz.
- With regard to variation of size, please contact our sales department.

Material

- Soft ferrite (Epoxy coating)

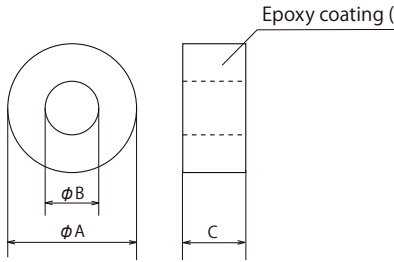

Unit:mm

Part No.	A	B	C	Impedance(Ω) 100MHz (1 Turn)
KTR-25-15-18E	26.7	13.4	19.5	≧ 54
KTR-28-16-20E	29.7	14.4	21.6	≧ 65
KTR-35-21-18E	35.6	20.0	18.8	≧ 80
KTR-40-27-15E	41.4	26.7	15.7	≧ 50
KTR-47-35-20E	49.1	33.1	21.6	≧ 54

● Impedance vs Frequency characteristic (Number of turns in the wire : 1 turn)

