




Improved sound quality for microphone



- Propagated external vibration of mechanical noise from motors, enclosures and so on is suppressed.
- Easy to assemble for microphone with connector because of material characteristic of high elongation rate.
- Silicon-free and sulfur-free material, solves electrical contact failures.

Specifications

MH-62-100BK

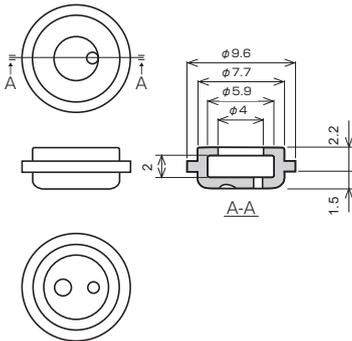

MH-6022-100BK

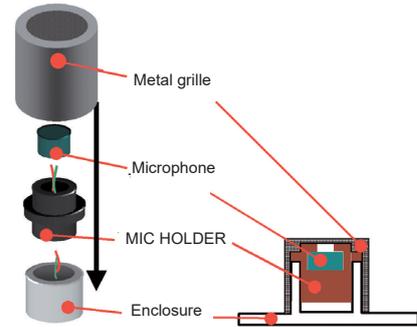

Please contact our sales department for installation instructions (precautions) before use. Also please confirm precautions described on the beginning page of the brochure.

Part No.	Material	Applicable microphone size
MH-62-100BK	TPS	φ6mm / Thickness 1.5~1.9mm
MH-6022-100BK	(KG-GEL/YMG-100-BK)	φ6mm / Thickness 2.2~2.9mm