

Unit : mm

Displacement prevention mechanism improves grounding of shielding cans.

Feature



- Guiding mechanism makes easy installation for shielding cans.
- Applicable even at corners of shielding cans.
- Multi-point contact with the shielding can provides higher shielding effectiveness.

Material

- Phosphor bronze for spring (Sn reflow plating)

Reference Installation Specifications

Applicable plate thickness : t=1.9 or less

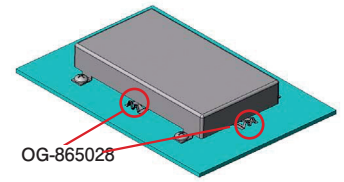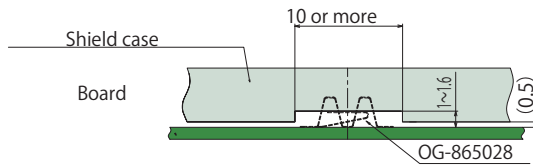

※The values are measured data for reference, not guaranteed.

Contacts

Grounding components

Clips

Clamps