

Releasable M-shaped clamp

Features

- Snap mounting provides easy maintenance and disassembling with no tools required.

Material

- Nylon 66 (Color : Natural) **UL94 V-0 (V-2*)**
- ※ For V0 type, "V0" is added to the end of the part No.
- ※ With regard to lead time and lot size of V-2 type, please contact us.



Twist Type



Odd-shaped hole

RWS-T



Push Type




Round hole


RWS-E

Wiring Clamps

RWS-T

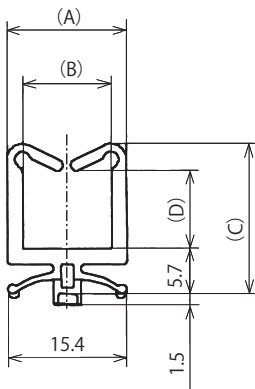

Specification drawing




Part No.	(A)	(B)	(C)	(D)	Mounting hole size	Panel thickness	Std. Package
RWS-1T V0	15.5	11.5	14.2	5.0	Refer to Specification drawing	0.8~1.6	200 / pcs.
RWS-2T V0			19.2	10.0			
RWS-3T V0			28.2	19.0			
RWS-4T V0			36.2	27.0			
RWS-1015T-V0	20.0	16.0	20.4	11.2			500 / pcs.


UL ...UL1565 recognized product

(Unit : mm)

RWS-3522T

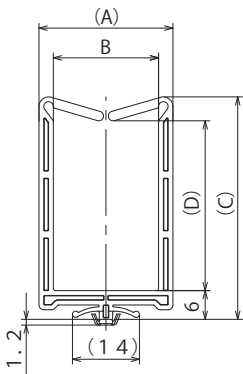

Specification drawing



Part No.	(A)	B	(C)	(D)	Mounting hole size	Panel thickness	Std. Package
RWS-3522T	28.0	22.0	46.5	35.5	Refer to Specification drawing	0.8~1.6	100 / pcs.

UL ...UL1565 recognized product

(Unit : mm)


For Cables

For Flat Cables


Removal prevention for connectors

For Optical fibers

RWS-E



Specification drawing



Part No.	(A)	B	(C)	(D)	Mounting hole size	Panel thickness	Std. Package
RWS-2E-V0	15.1	11.1	25.4	10.2	Refer to Specification drawing	0.5~2.0	500 / pcs.

UL ...UL1565 recognized product

(Unit : mm)