



LOSTMER TPS SHEET / ALS20AF2

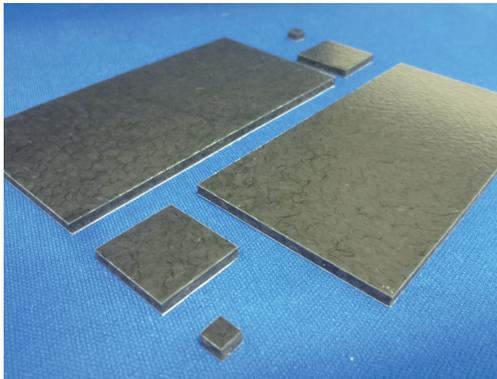

Non silicone type sheet with non-tacky and high-damping performance.

- Provides high vibration damping property as well as impact buffering.
- Provides high sliding property, durability and wear resistance by welded film.
- Because of silicone free type, siloxane is not included.

Adhesive tape equipped type / ALS20AF2-TC

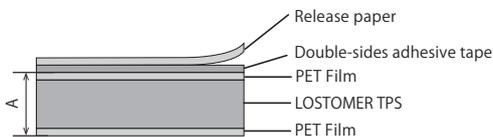

Non adhesive tape type / ALS20AF2



Part No.	A (mm)	Original sheet (mm)	Color
ALS20AF2-1.0(TC)	1.0	300×210	Black
ALS20AF2-2.0(TC)	2.0		
ALS20AF2-3.0(TC)	3.0		
ALS20AF2-4.0(TC)	4.0		
ALS20AF2-5.0(TC)	5.0		


Properties

● Material property


Item	Unit	LOSTMER TPS
Hardness	Durometer type A ^{*1}	A 20
Resonance frequency	Hz	78.3
Maximum vibration transmission rate	—	1.2
Loss factor	—	1.87

*1) In conformity to JIS K 6253


● Vibration Transmission

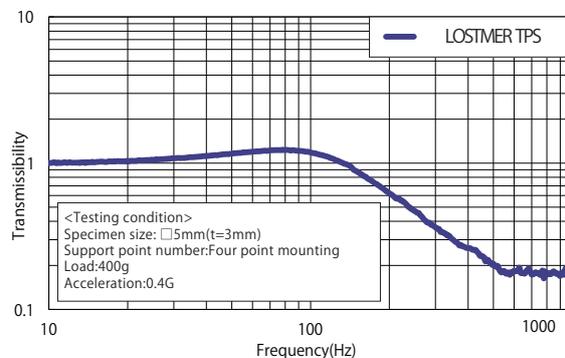

● Impact buffering Property

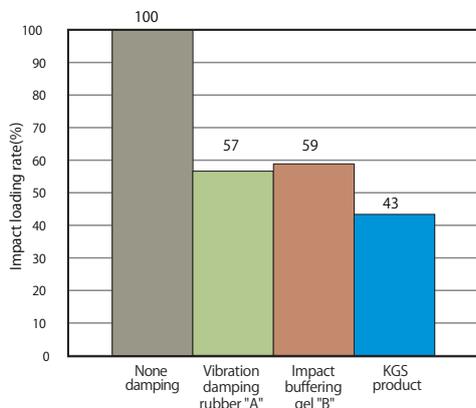

<Testing condition>
Specimen size: 8 x 10mm(t=5mm)
Support point number: two point mounting
Dropping weighting: 800g
Drop height: 140mm



- All specifications and characteristics shown herein are typical values, but are not guaranteed.
- All specifications and characteristics shown herein are subject to change without notice for improvements or changes in specification.
- It is prohibited reprint of the article in this brochure without prior written consent by Kitagawa Industries Co., Ltd.