



### Edge protection locking cable clamp

#### Features

- Lock prevents cable bundles from release.
- Original structure of EDS~L-V0 protect cables from damage.



Insertion Mounting

#### Material


- Nylon 66 (Color : Natural)  
(Color : Black)

UL94 V-0


UL94 V-0

: EDS-17L, -25L

#### EDS-0607L

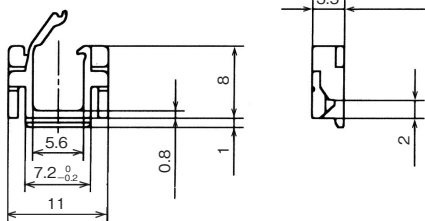

#### Specification drawing




Part No.	Mounting hole size	Panel thickness	Std. Package
UL EDS-0607L	Refer to Specification drawing	0.8~1.6	1,000 pcs.

UL ... UL1565 recognized product


(Unit : mm)

#### EDS~L-V0



Bite-in protection for cables


Inner round corners protect cables against damage



#### Specification drawing

•EDS-1L-V0

•EDS-\*\*\*L-V0

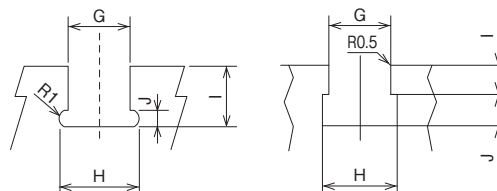


※ EDS-1L-V0 has a slightly different configuration from the others

Part No.	(A)	B	(C)	(D)	(E)	F	Panel thickness	G	H	I	J	Std. Package
UL EDS-1L-V0	10.0	11.6	10.0	20.0	18.6	4.8	0.6~1.2	14 <sup>0</sup> <sub>-0.2</sub>	16 <sup>0</sup> <sub>-0.2</sub>	10	2	500 pcs.
UL EDS-0704L-V0	7.1	7.0	7.8	17.9	16.9	3.8	0.6~2.0	12.8±0.1	13.8±0.1	2.7±0.1	3.4 <sup>+0.2</sup> <sub>0</sub>	
UL EDS-1010L-V0	15.2	10.5	15.9	21.2	25.7	4.2		14±0.1	17±0.1	6.5±0.1	7.5 <sup>+0.2</sup> <sub>0</sub>	
UL EDS-1710L-V0	15.1	17.8	15.9	29.1	32.9			22±0.1	25±0.1	6.0±0.1	8.0 <sup>+0.2</sup> <sub>0</sub>	
UL EDS-1720L-V0	24.6	17.8	26.3	31.5	42.6			22±0.1	25±0.1	16±0.1	8.0 <sup>+0.2</sup> <sub>0</sub>	


UL ... UL1565 recognized product

(Unit : mm)


#### EDS-17L

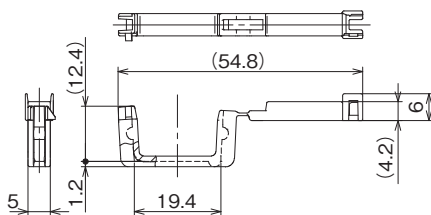


#### Specification drawing



#### EDS-25L

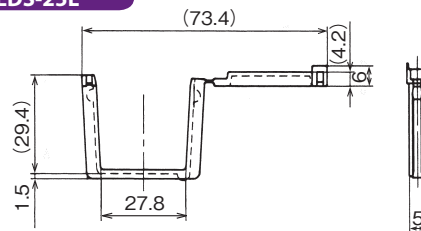

#### Specification drawing



Part No.	Panel thickness	Std. Package
UL EDS-17L	0.8~2.2	500 pcs.
UL EDS-25L		

UL ... UL1565 recognized product

(Unit : mm)